


Lighting Catalog






LED Power : 10W / 12W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 89\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO DALI CRI93



Optical Angle




Fixture Colour Options




LED Power : 10W / 12W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 83\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO DALI CRI93



Optical Angle




Fixture Colour Options




LED Power : 5W / 7W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 72\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO DALI CRI93



Optical Angle




Fixture Colour Options




LED Power : 5W / 7W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 72\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO DALI CRI93



Optical Angle



Fixture Colour Options



Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new Classic Series range of LED products can be used to replace functional luminaries in general lighting applications. Non-dimming triac-dimming 0-10V,DALI are now available. The process of selecting, installing and maintaining is so easy – it's a simple switch.

IP54 LED ECO DALI CRI93







LED Power : 10W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 72\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle




Fixture Colour Options




LED Power : 5W / 7W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 68\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle



Fixture Colour Options



Anti-Glare Series

Currently, virtually all new and modernized buildings are looking for lighting solutions that provide high-quality light with low energy consumption and low maintenance costs.

New Anti-Glare Series LED luminaires will be the right products.

Installing and maintaining the luminaires was maximized simplified.

The most important thing is to protect our eyes with $\text{UGR} < 19$.


IP54 LED eco






LED Power : 10W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 83\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle



Fixture Colour Options




LED Power : 5W / 7W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 83\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle




Fixture Colour Options




LED Power : 10W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 88\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle




Fixture Colour Options




LED Power : 5W / 7W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 88\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle




Fixture Colour Options




LED Power : 10W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $78*78\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle




Fixture Colour Options



LED Power : 5W / 7W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $78*78\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO







LED Power : 2*10W
CRI : 93
Luminous Flux : ≥85Lm/W
Cut Out Size : 168*88mm
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle




Fixture Colour Options




LED Power : 2*5W / 2*7W
CRI : 93
Luminous Flux : ≥85Lm/W
Cut Out Size : 168*88mm
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle




Fixture Colour Options




LED Power : 3*10W
CRI : 93
Luminous Flux : ≥85Lm/W
Cut Out Size : 252*88mm
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle




Fixture Colour Options




LED Power : 3*5W / 3*7W
CRI : 93
Luminous Flux : ≥85Lm/W
Cut Out Size : 252*88mm
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle



Fixture Colour Options




IP54 LED ECO

10W




Dreamy beautiful , after installed can't see any frame on the ceiling.

IP54 LED ECO

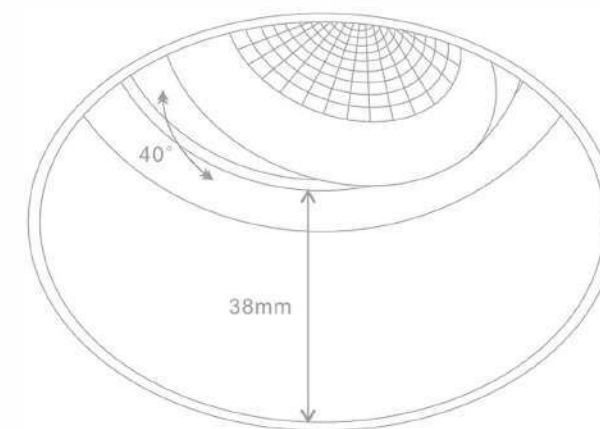


No Light, No Lamp

Deep Cup Anti-glare, Soft Light Effect

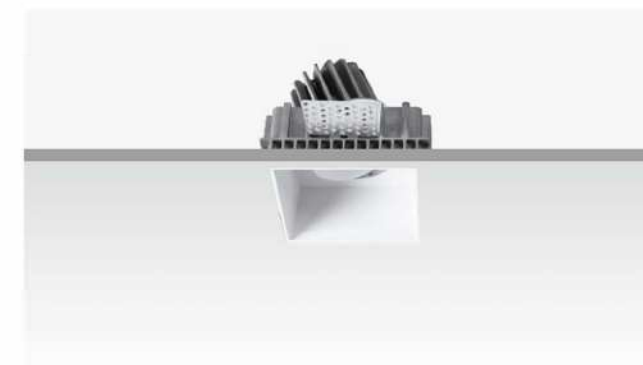


LED Power : 10W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $\Phi 96\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle




Fixture Colour Options




LED Power : 10W
CRI : 93
Luminous Flux : $\geq 85\text{Lm/W}$
Cut Out Size : $96*96\text{mm}$
CCT : 2700K / 3000K / 4000K

IP54 LED ECO



Optical Angle



Fixture Colour Options



IP54 LED eco



Adjust The Upper And Lower 90°

Light Moves Freely And Is No Longer Restricted



Can Be 360°


Rotationfill Light Is More Relaxed And Free




LED Power : 12W
CRI : 93
Luminous Flux : ≥85Lm/W
Cut Out Size : Φ90mm
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle




Fixture Colour Options




LED Power : 12W
CRI : 93
Luminous Flux : ≥85Lm/W
Cut Out Size : 90*90mm
CCT : 2700K / 3000K / 4000K

IP54 LED eco

Optical Angle



Fixture Colour Options






GU10 REPLACEABLE FIXTURE SERIES



Cut Out Size :  $\Phi 83\text{mm}$




IP20     

Fixture Colour Options

 Texture White  Texture Black



Cut Out Size :  $\Phi 89\text{mm}$




IP20     

Fixture Colour Options

 Texture White  Texture Black



Cut Out Size :  $78 \times 78\text{mm}$




IP20     

Fixture Colour Options

 Texture White  Texture Black



Cut Out Size :  $88 \times 88\text{mm}$



LED TRACK LIGHT SERIES

IP20 LED eco


Track Light Series




LED Power : 20W
CRI : 93
Luminous flux : ≥85Lm/W
CCT : 2700K / 3000K / 4000K

IP20 LED eco

Optical Angle




Fixture Colour Options




LED Power : 30W
CRI : 93
Luminous flux : ≥85Lm/W
CCT : 2700K / 3000K / 4000K

IP20 LED eco

Optical Angle



Fixture Colour Options



MAGNETIC LAMP SERIES

NEW




Power	6W	6W	6W
Installation	Magnetic	Magnetic	Magnetic
Light Source	OSRAM / CREE	OSRAM / CREE	OSRAM / CREE
Size(DxH)	Φ100mm	Φ120mm	Φ46X280mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90/≥97
Beam angle	/	/	25°/40°/60°/80°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Lumens	540 lm	480 lm	420 lm
Life time	50000 h	50000 h	50000 h
IP	IP20 / IP65	IP20 / IP65	IP20 / IP65

Photometric


6W 3000K

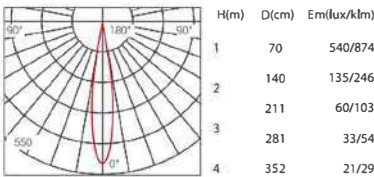

Beam Angle 25° 10W 3000K

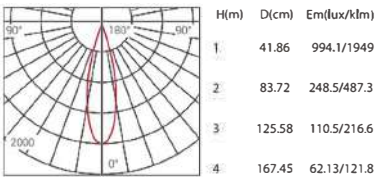

Beam Angle 40° 10W 3000K

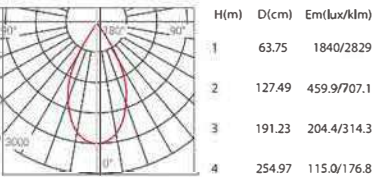

Product Features

- 355° rotation can be achieved
- 30 degree swing angle
- 11 forms available
- Equipped with 6 optical schemes
- IP54 CAN BE MADE
- With flexible mobility and convenient adjustment function
- Meet the needs of multiple scenarios



Original Type



Black Hole Type



Snout Type



Acrylic Type



Focusing Type



Trimless Type



Single Type



Double Type



Embedded Type




Surface Round Type



Surface Square Type

Product Structure Diagram

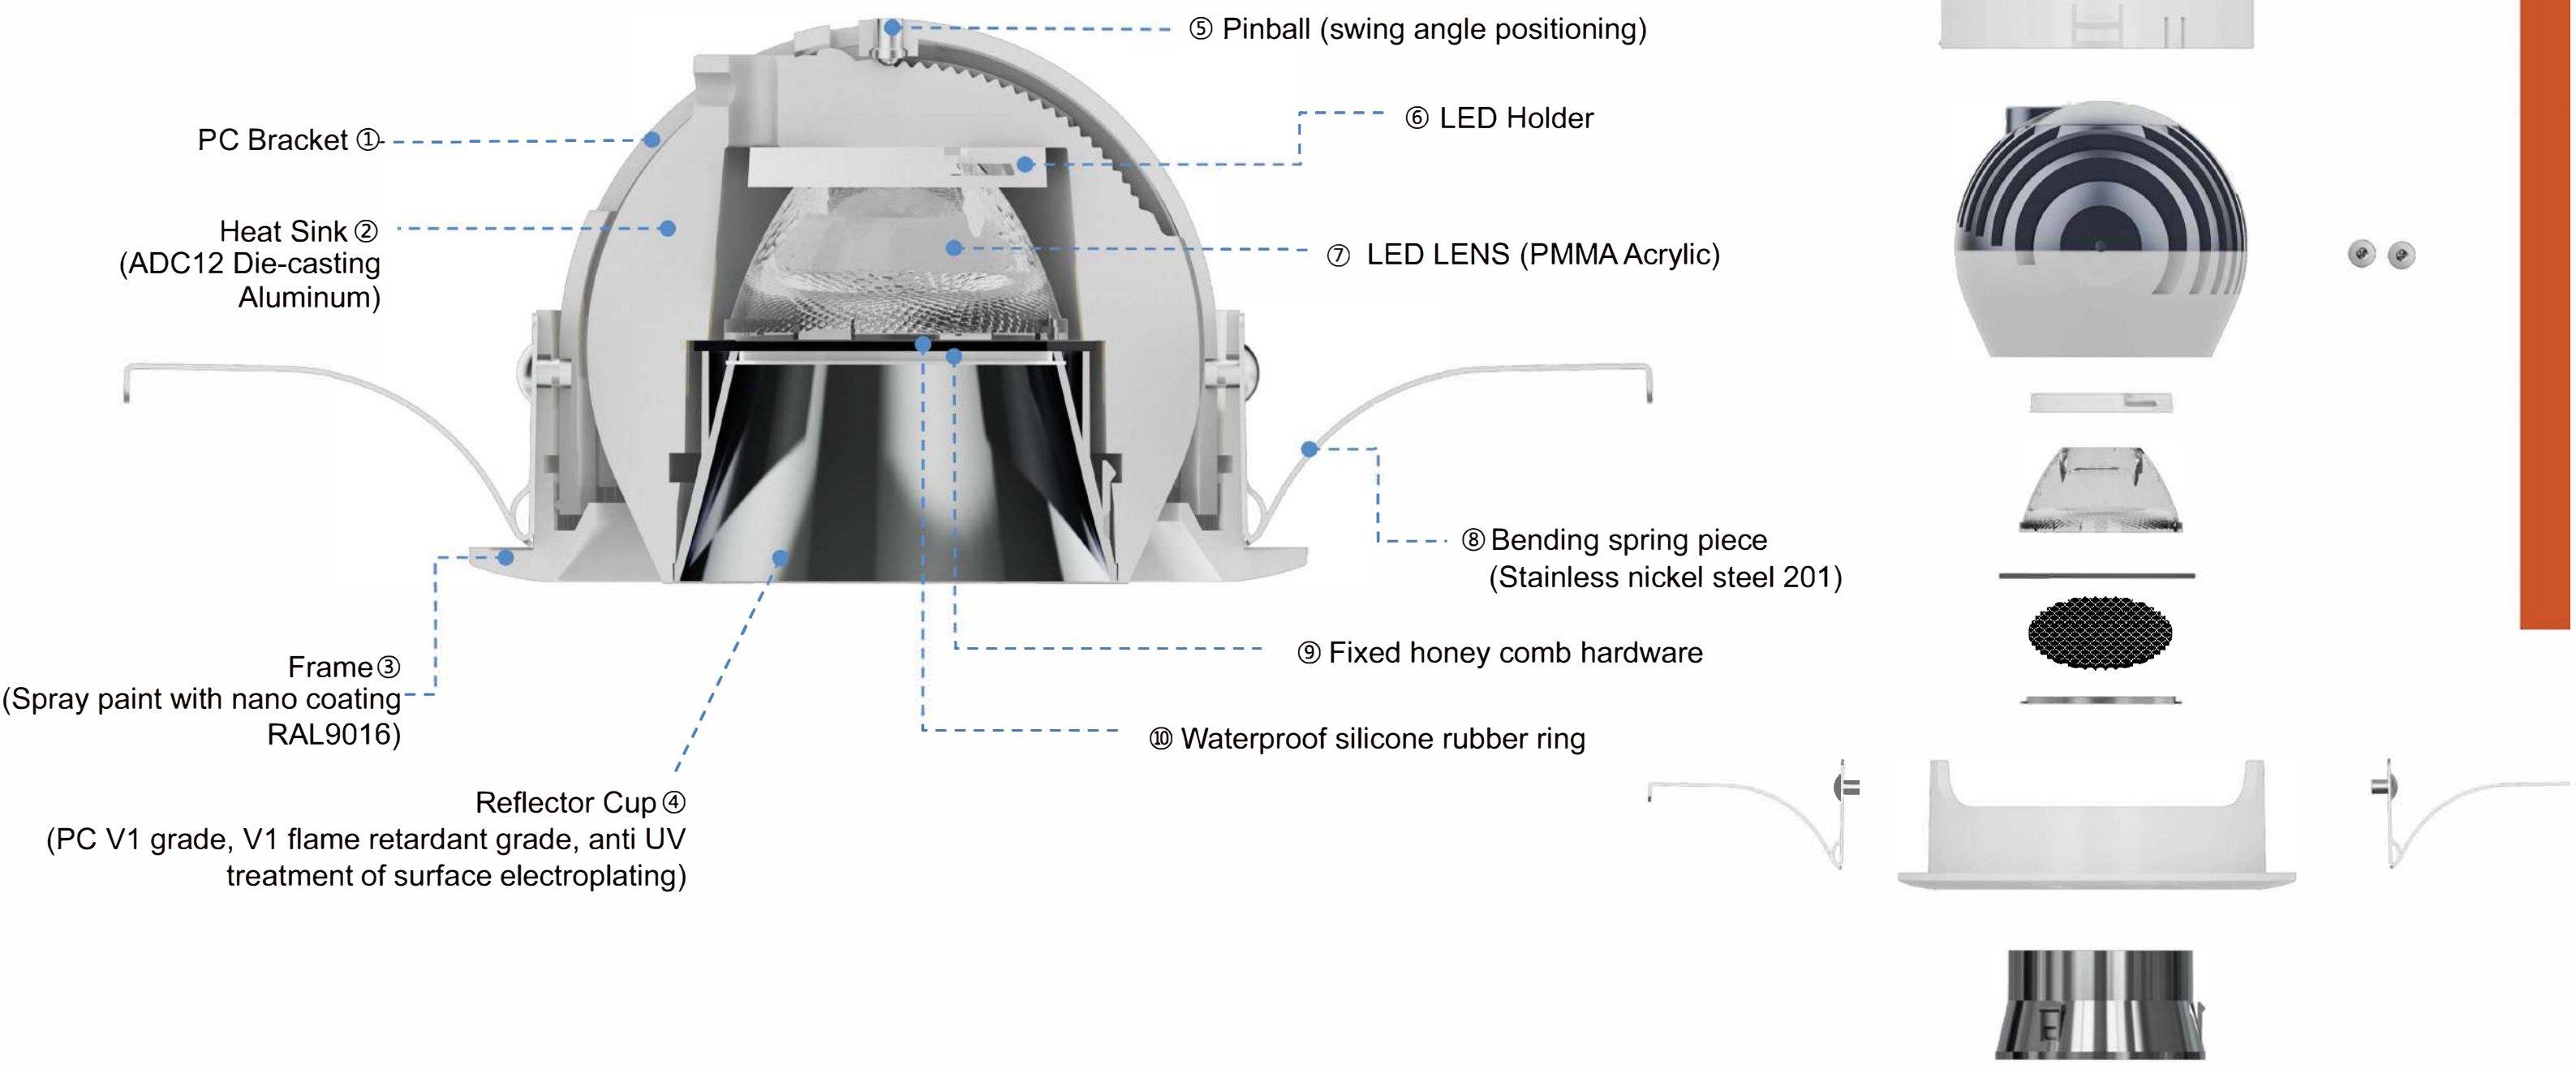



Installation Method

The installation method can be embedded, trimless, surface-embedded and surface



Embedded



Frameless




Surface-embedded




Surface


Optical Fitting On Demand Transformation

Five optical Fitting are optional, which can realize the change of spot shape, full lamp UGR and other technical parameters to meet the lighting needs of different scenes

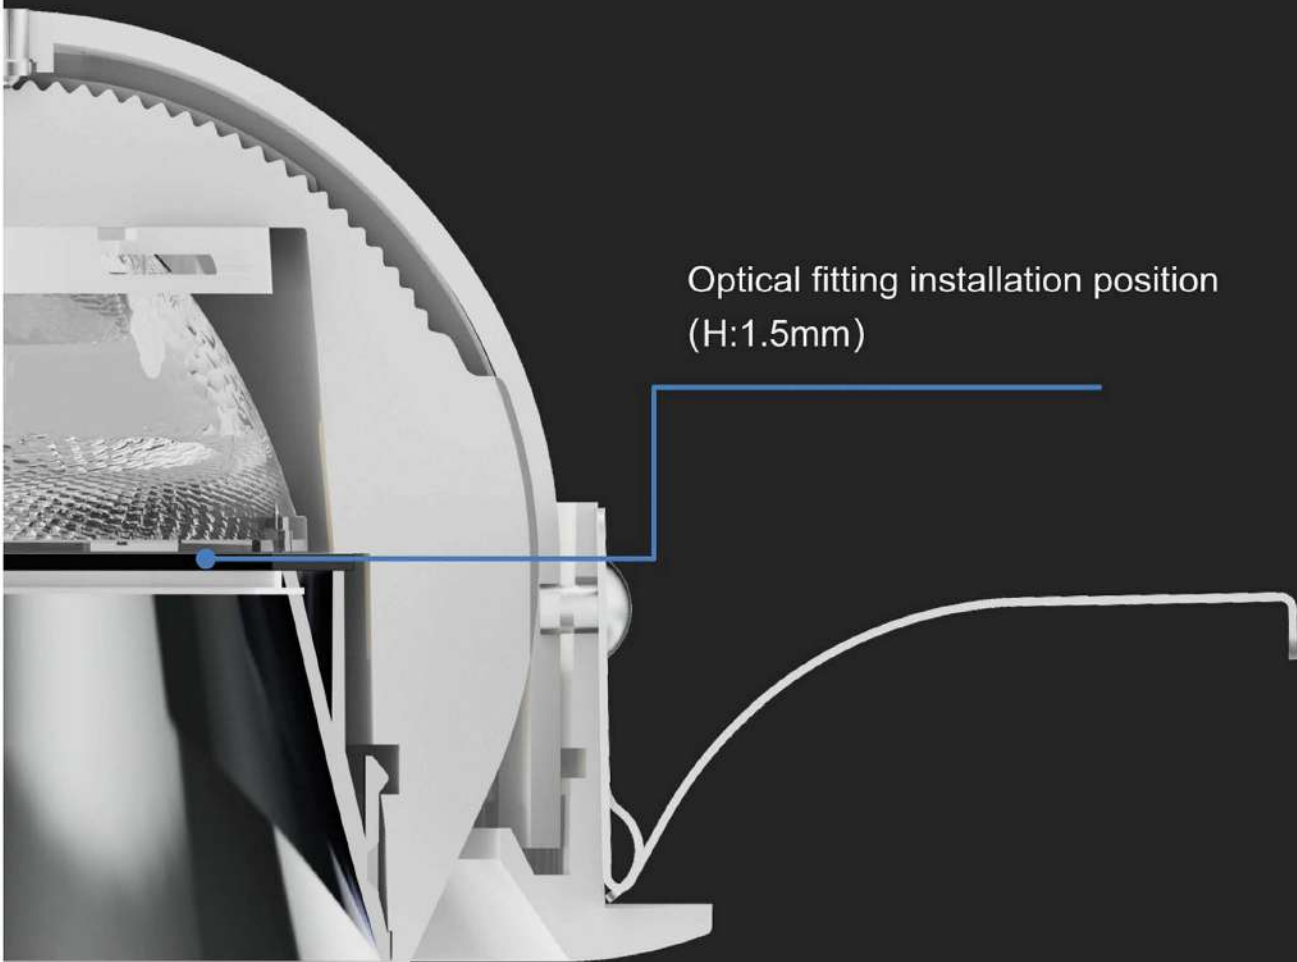

		BVT optical film
		Clear glass sheet
		Stretching optical PC
		Honeycomb
		Anti dazzle ring Secondary facula removal at small beam angle)

BlackHole Type

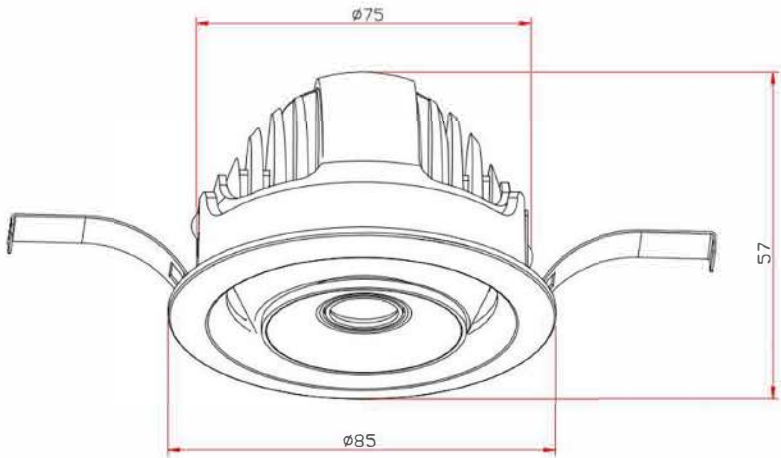

Power:	10W
Size (WXH):	Φ85x57mm
Cutout:	Φ75mm
Beam Angle:	15°、24°、36°、50°



UGR<9



No Stray Light, Round Spot

No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable



