



Lighting Catalog


01 COMMERCIAL LIGHTING



EDGE-LIT PANEL




BASIC

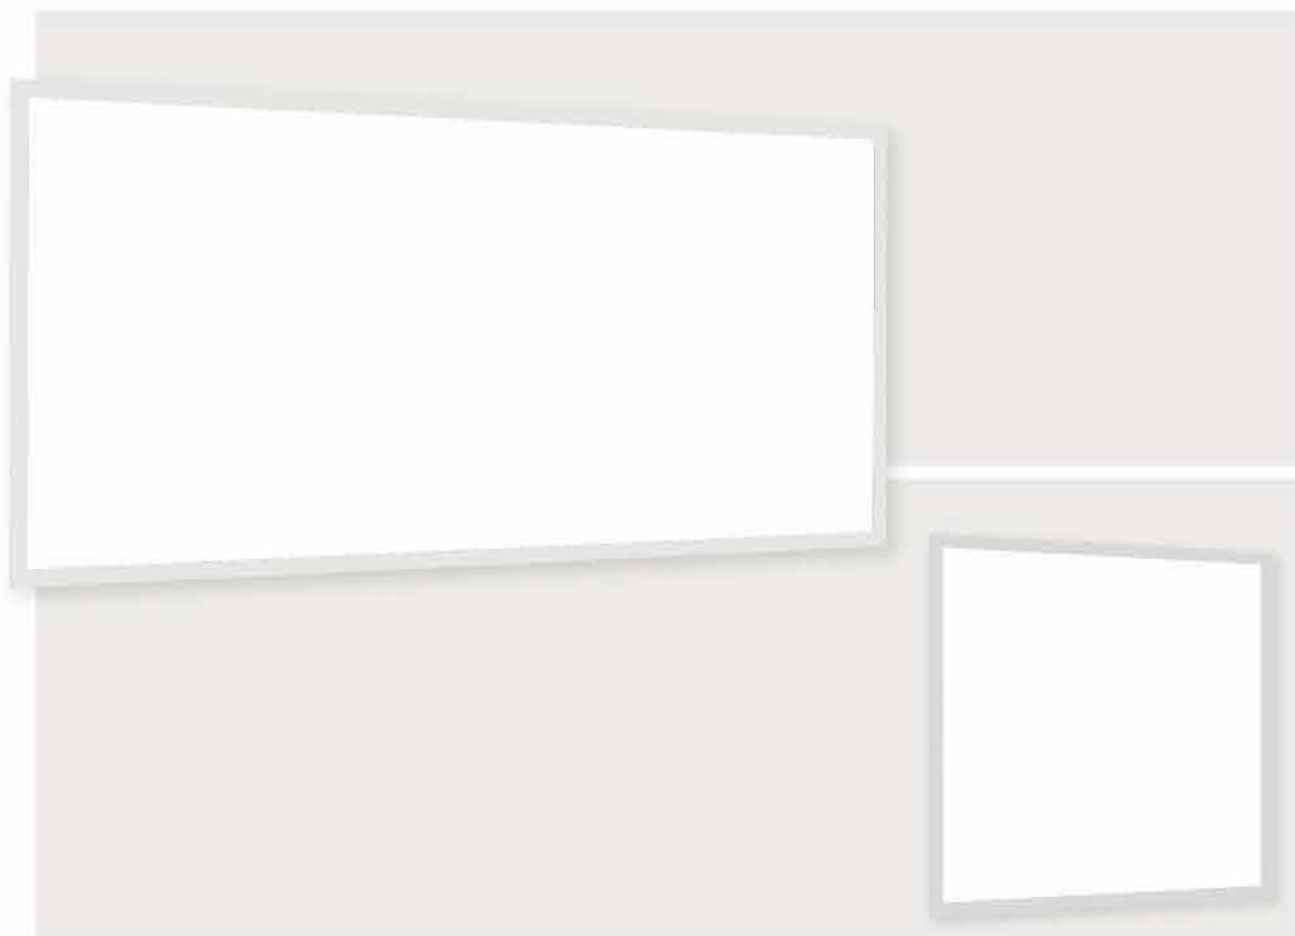

MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
BR01	15W	1500LM±5%	100	19/22	3000-6500K	295*295*9
BR02	20W	2000LM±5%	100	19/22	3000-6500K	295*595*9
BR03	40W	4000LM±5%	100	19/22	3000-6500K	595*595*9
BR04	40W	4000LM±5%	100	19/22	3000-6500K	620*620*9
BR05	40W	4000LM±5%	100	19/22	3000-6500K	295*1195*9
BR06	60W	6000LM±5%	100	19/22	3000-6500K	595*1195*10
BR07	80W	8000LM±5%	100	19/22	3000-6500K	595*1195*10
BR08	40W	4800LM±5%	120	19/22	3000-6500K	595*595*9
BR09	40W	4800LM±5%	120	19/22	3000-6500K	620*620*9
BR10	40W	4800LM±5%	120	19/22	3000-6500K	295*1195*9
BR11	60W	7200LM±5%	120	19/22	3000-6500K	595*1195*10

HIGH EFFICIENCY

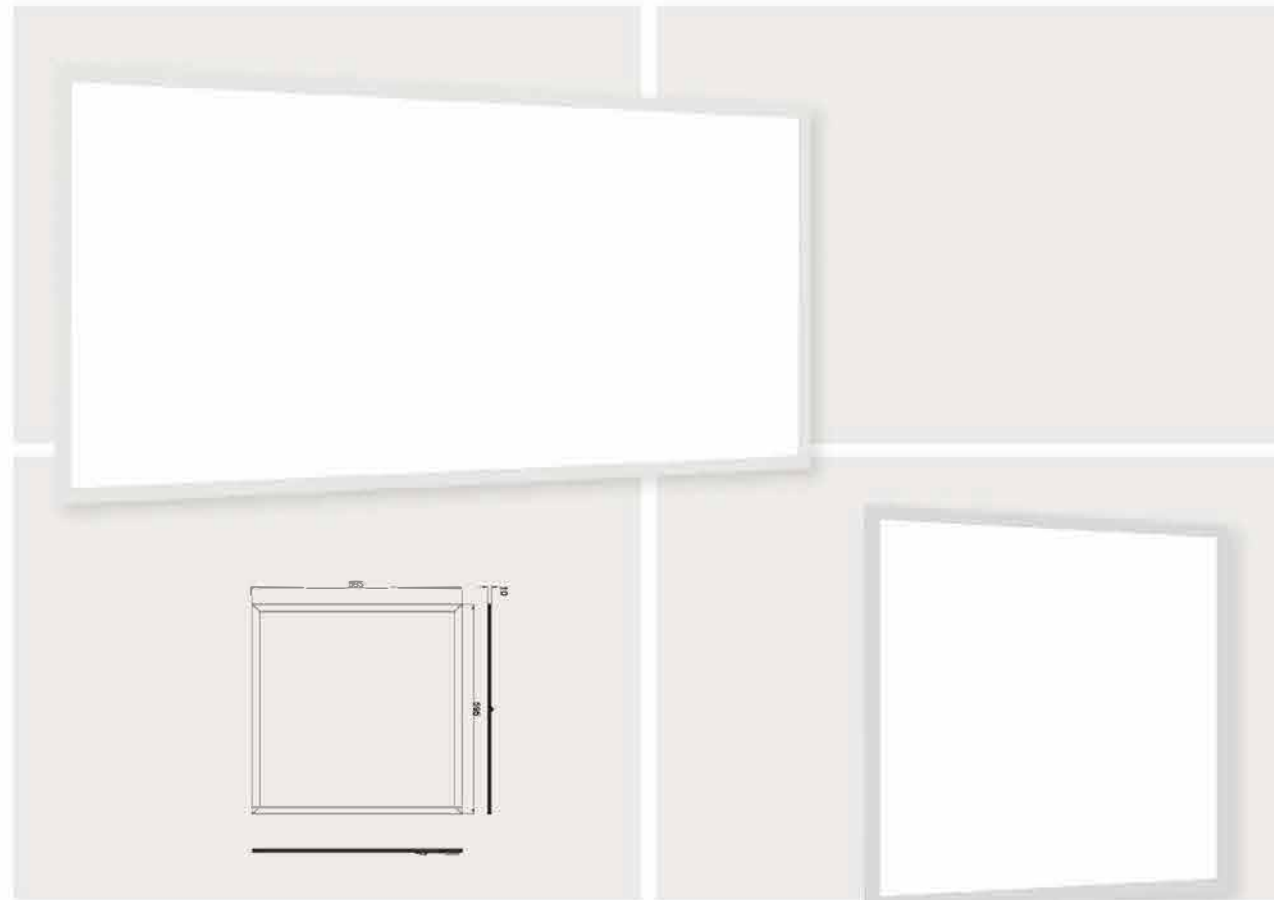


POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
25W	3750LM±5%	150	22	4000-6500K	595*595*9
25W	3750LM±5%	150	22	4000-6500K	620*620*9
25W	3750LM±5%	150	22	4000-6500K	295*1195*9
50W	7500LM±5%	150	22	4000-6500K	595*1195*10
25W	3500LM±5%	140	19/22	4000-6500K	595*595*9
25W	3500LM±5%	140	19/22	4000-6500K	620*620*9
25W	3500LM±5%	140	19/22	4000-6500K	295*1195*9
50W	7000LM±5%	140	19/22	4000-6500K	595*1195*10

NON-ISOLATED

POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
24W	3840LM±5%	160	22	4000-6500K	595*595*9
24W	3840LM±5%	160	22	4000-6500K	620*620*9
24W	3840LM±5%	160	22	4000-6500K	295*1195*9




ULTRA SLIM SURFACE

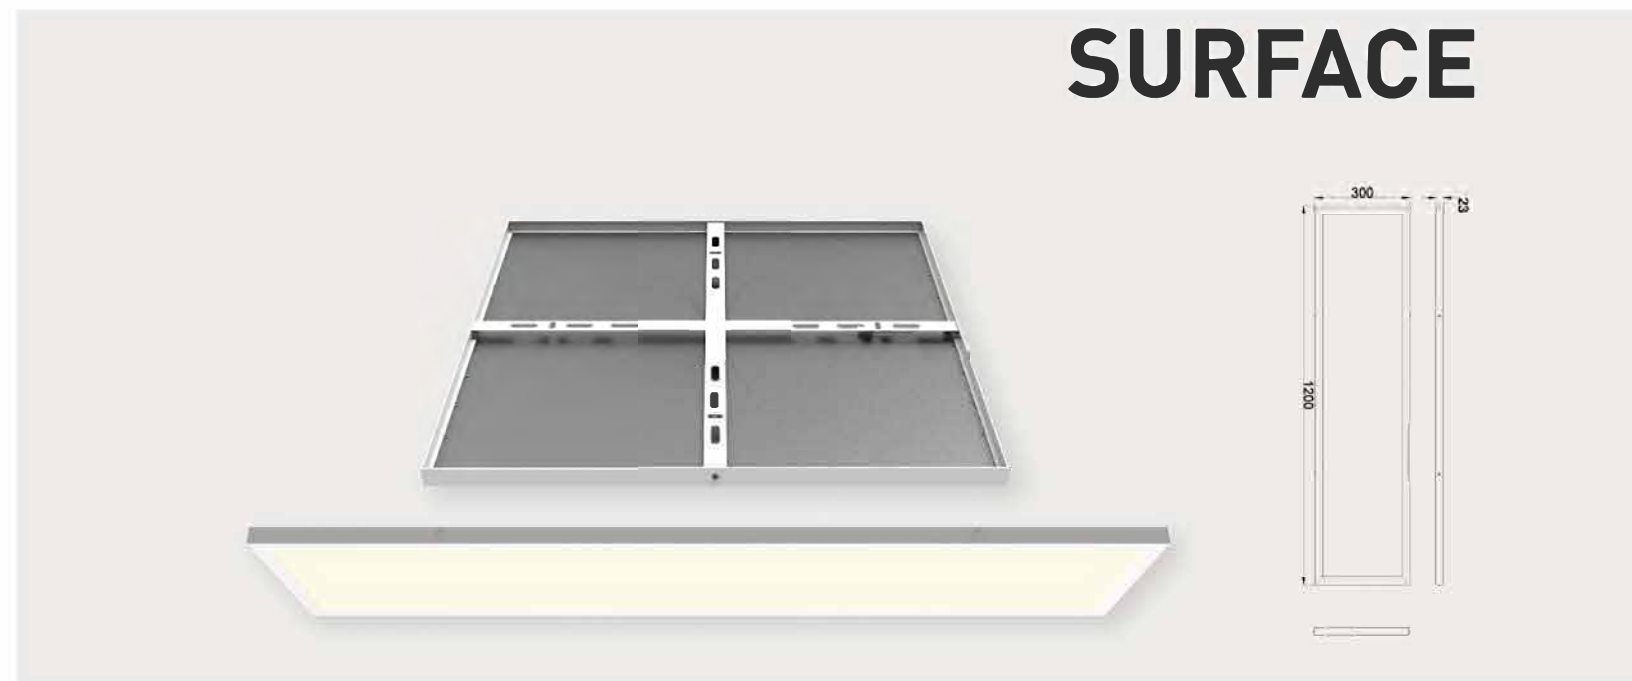

POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
18W	1800LM±5%	100	22	3000-6500K	295*595*23
40W	4000LM±5%	100	22	3000-6500K	595*595*23
40W	4000LM±5%	100	22	3000-6500K	295*1195*23



SMALL & ROUND

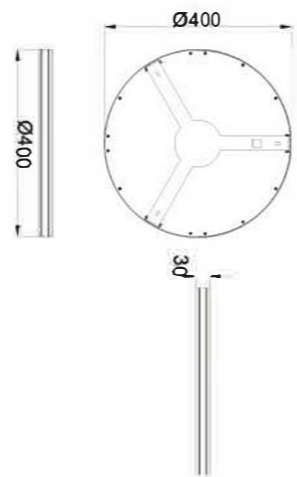

POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
25W	2500LM ± 5%	100	22	3000-6500K	φ400*30
36W	3600LM ± 5%	100	22	3000-6500K	φ500*30
40W	4000LM ± 5%	100	22	3000-6500K	φ600*30
50W	5000LM ± 5%	100	22	3000-6500K	φ800*30




IP65

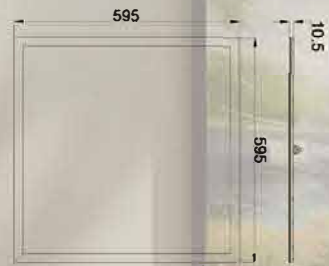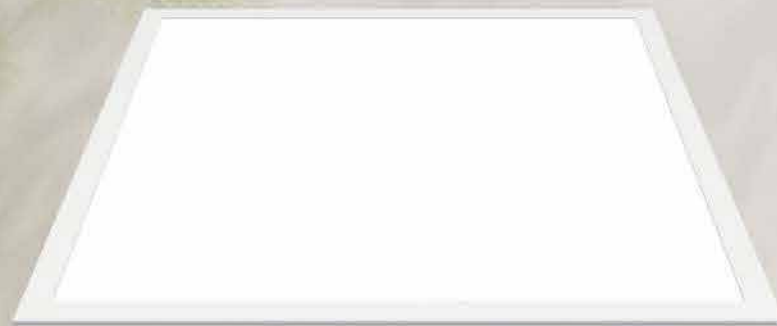


POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
36W	3600LM ± 5%	100	22	3000-6500K	595*595*10
36W	4320LM ± 5%	120	22	3000-6500K	595*595*10
40W	4000LM ± 5%	100	22	3000-6500K	595*595*10
40W	4800LM ± 5%	120	22	3000-6500K	595*595*10
30W	3900LM ± 5%	130	22	3000-6500K	595*595*10
36W	3600LM ± 5%	100	22	3000-6500K	295*1195*10
36W	4320LM ± 5%	120	22	3000-6500K	295*1195*10
40W	4000LM ± 5%	100	22	3000-6500K	295*1195*10
40W	4800LM ± 5%	120	22	3000-6500K	295*1195*10
30W	3900LM ± 5%	130	22	3000-6500K	295*1195*10



WITH SENSOR

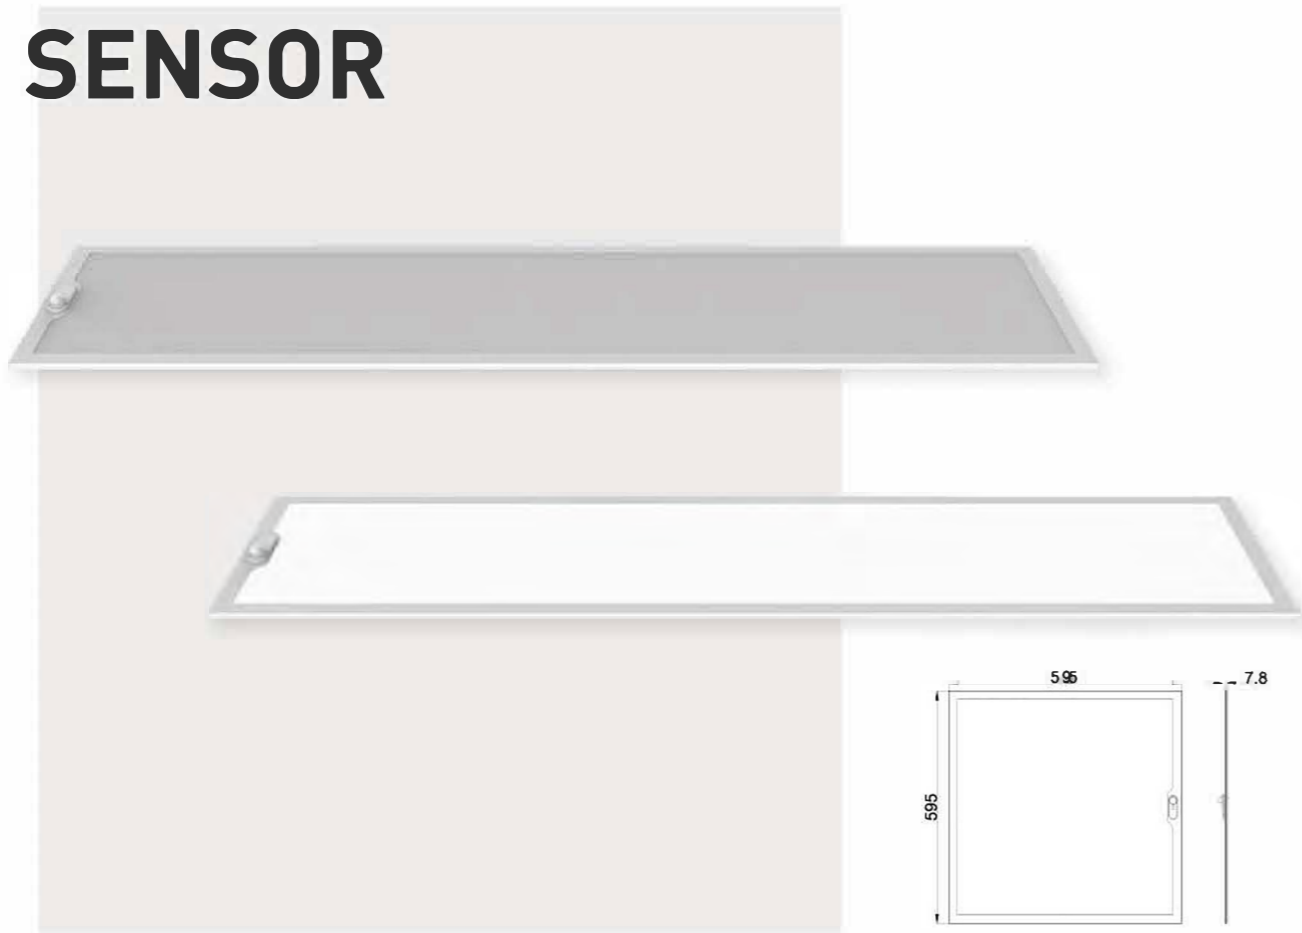

WITH BRACKET

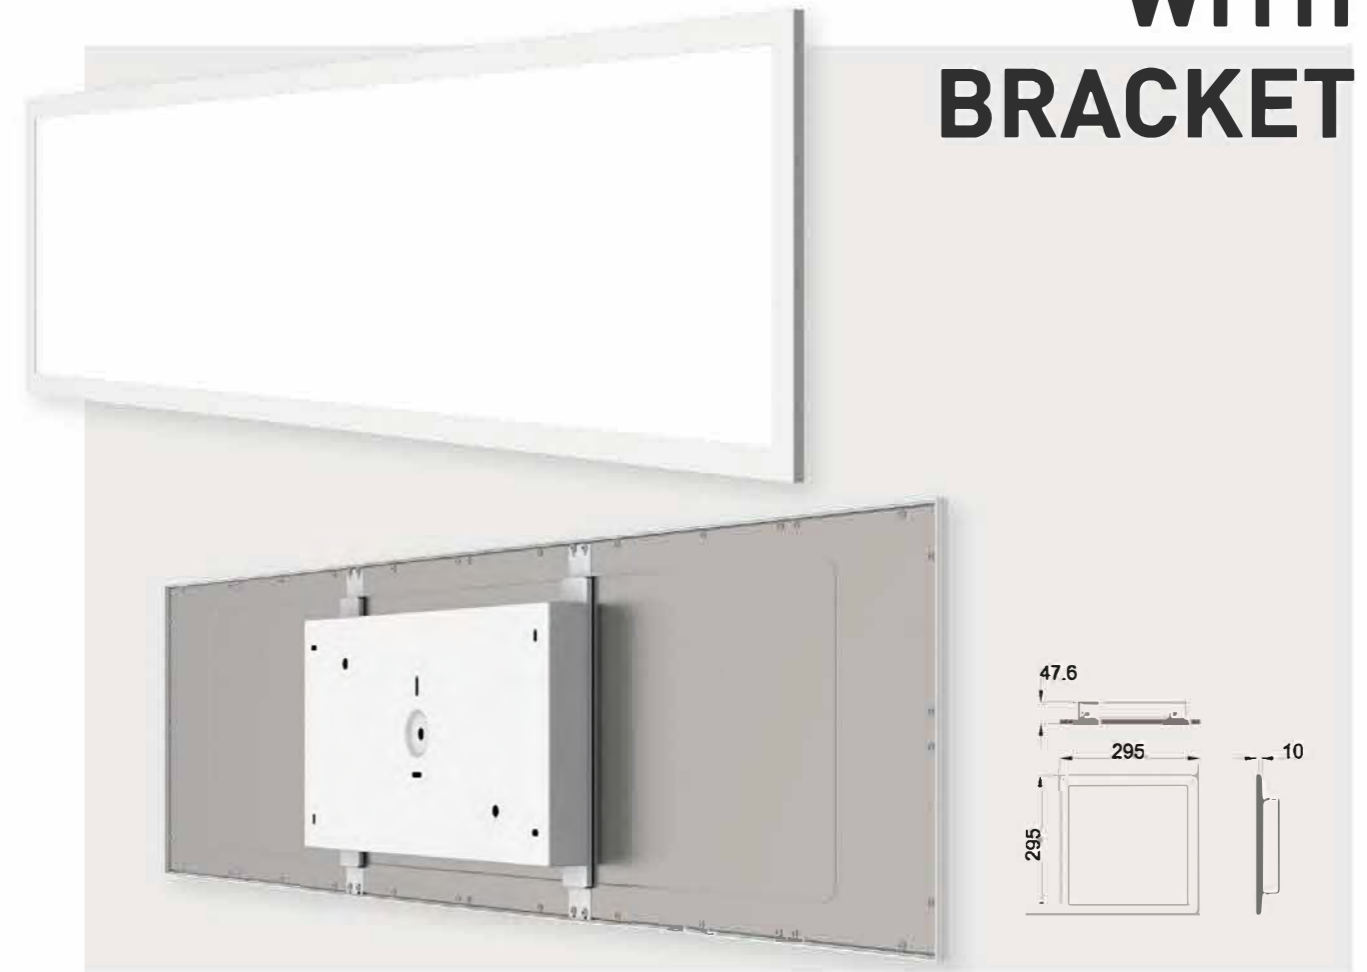


MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
MS-1000-01	36W	3600LM±5%	100	22	3000-6500K	595*595*9
MS-1000-02	36W	4320LM±5%	120	22	3000-6500K	595*595*9
MS-1000-03	40W	4000LM±5%	100	22	3000-6500K	595*595*9
MS-1000-04	40W	4800LM±5%	120	22	3000-6500K	595*595*9
MS-1000-05	36W	3600LM±5%	100	22	3000-6500K	620*620*9
MS-1000-06	36W	4320LM±5%	120	22	3000-6500K	620*620*9
MS-1000-07	40W	4000LM±5%	100	22	3000-6500K	620*620*9
MS-1000-08	40W	4800LM±5%	120	22	3000-6500K	620*620*9
MS-1000-09	36W	3600LM±5%	100	22	3000-6500K	295*1195*9
MS-1000-10	36W	4320LM±5%	120	22	3000-6500K	295*1195*9
MS-1000-11	40W	4000LM±5%	100	22	3000-6500K	295*1195*9
MS-1000-12	40W	4800LM±5%	120	22	3000-6500K	295*1195*9

MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
MS-1000-13	15W	1200LM±5%	80	22	3000-6500K	295*295*10(50)
MS-1000-14	20W	1600LM±5%	80	22	3000-6500K	450*450*10(50)
MS-1000-15	36W	2880LM±5%	80	22	3000-6500K	300*800*10(50)
MS-1000-16	40W	3200LM±5%	80	22	3000-6500K	595*595*10(50)
MS-1000-17	40W	3200LM±5%	80	22	3000-6500K	295*1195*10(50)
MS-1000-18	15W	1200LM±5%	80	22	3000-6500K	295*295*10(50)
MS-1000-19	20W	1600LM±5%	80	22	3000-6500K	450*450*10(50)
MS-1000-20	36W	2880LM±5%	80	22	3000-6500K	300*800*10(50)
MS-1000-21	40W	3200LM±5%	80	22	3000-6500K	595*595*10(50)
MS-1000-22	40W	3200LM±5%	80	22	3000-6500K	295*1195*10(50)

BACK-LIT PANEL



BASIC

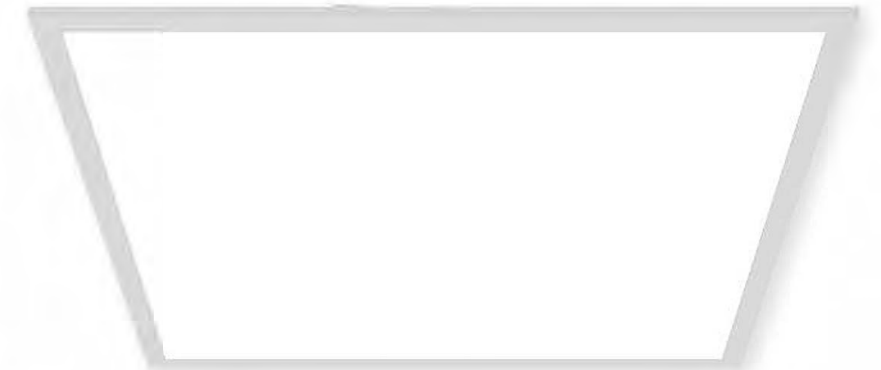

	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
	24W	2400LM±5%	100	19/22	3000-6500K	295*295*26
	40W	4000LM±5%	100	19/22	3000-6500K	595*595*26
	40W	4000LM±5%	100	19/22	3000-6500K	620*620*26
	40W	4000LM±5%	100	19/22	3000-6500K	295*1195*26
	60W	6000LM±5%	100	19/22	3000-6500K	595*1195*32
	24W	2880LM±5%	120	19/22	3000-6500K	295*595*26
	40W	4800LM±5%	120	19/22	3000-6500K	595*595*26
	40W	4800LM±5%	120	19/22	3000-6500K	620*620*26
	40W	4800LM±5%	120	19/22	3000-6500K	295*1195*26
	60W	7200LM±5%	120	19/22	3000-6500K	595*1195*32

NON-ISOLATED



NON-ISOLATED

MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
295*295*26	12W	1200LM±5%	100	22	3000-6500K	295*295*26
295*595*26	24W	2400LM±5%	100	22	3000-6500K	295*595*26
595*595*26	36W	3600LM±5%	100	19/22	3000-6500K	595*595*26
595*595*26	40W	4000LM±5%	100	19/22	3000-6500K	595*595*26
620*620*26	36W	3600LM±5%	100	19/22	3000-6500K	620*620*26
620*620*26	40W	4000LM±5%	100	19/22	3000-6500K	620*620*26
295*1195*26	36W	3600LM±5%	100	19/22	3000-6500K	295*1195*26
295*1195*26	40W	4000LM±5%	100	19/22	3000-6500K	295*1195*26
595*1195*32	50W	5000LM±5%	100	19/22	3000-6500K	595*1195*32

NON-ISOLATED&WIDE VOLTAGE

MODEL	POWER RANGE	LUMEN(LM)	UGR	VOLTAGE	CCT	PRODUCT SIZE(MM)
595*595*26	36W	3600LM±5%	19/22	100-240	3000-6500K	595*595*26
595*595*26	40W	4000LM±5%	19/22	100-240	3000-6500K	595*595*26
620*620*26	36W	3600LM±5%	19/22	100-240	3000-6500K	620*620*26
620*620*26	40W	4000LM±5%	19/22	100-240	3000-6500K	620*620*26
295*1195*26	36W	3600LM±5%	19/22	100-240	3000-6500K	295*1195*26
295*1195*26	40W	4000LM±5%	19/22	100-240	3000-6500K	295*1195*26
595*1195*32	50W	5000LM±5%	19/22	100-240	3000-6500K	595*1195*32



CCT




MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	PRODUCT SIZE(MM)
595*595*26	40W	4000LM±5%	100	19/22	595*595*26
620*620*26	40W	4000LM±5%	100	19/22	620*620*26
295*1195*26	40W	4000LM±5%	100	19/22	295*1195*26
595*1195*32	60W	6000LM±5%	100	19/22	595*1195*32



HIGH EFFICIENCY WITH NON-ISOLATED


UGR 16

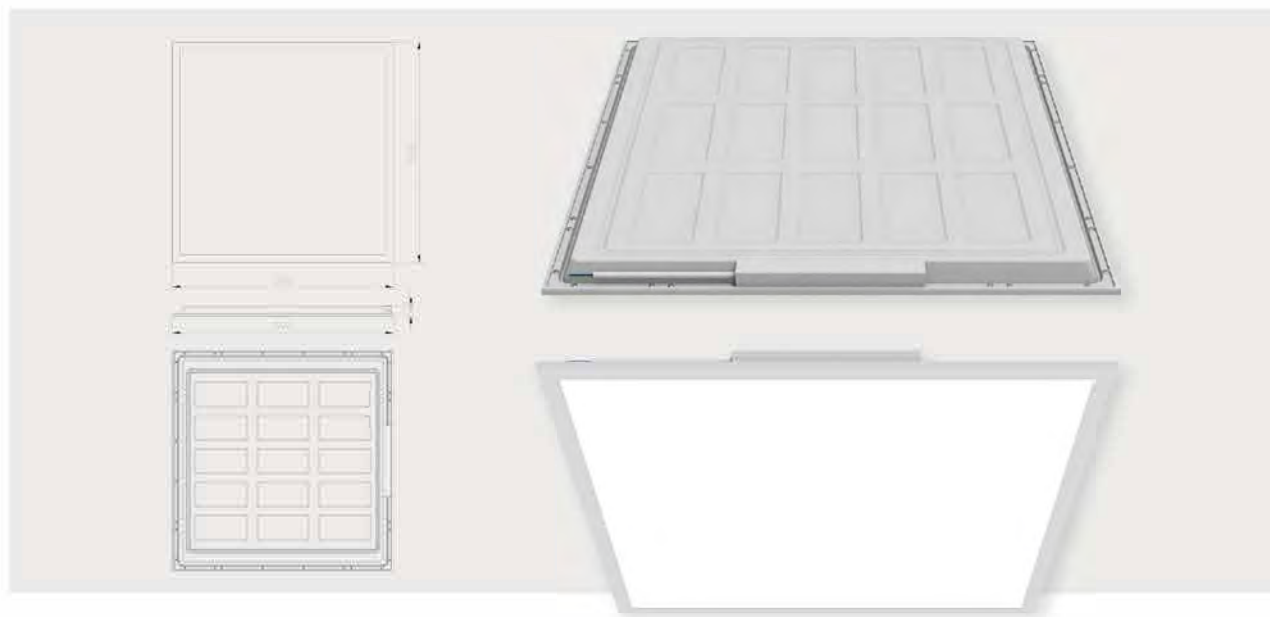


POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
24W	4080LM±5%	165	22	4000-6500K	595*595*32

POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
25W	3500LM±5%	140	16	4000-6500K	595*595*32


IP65

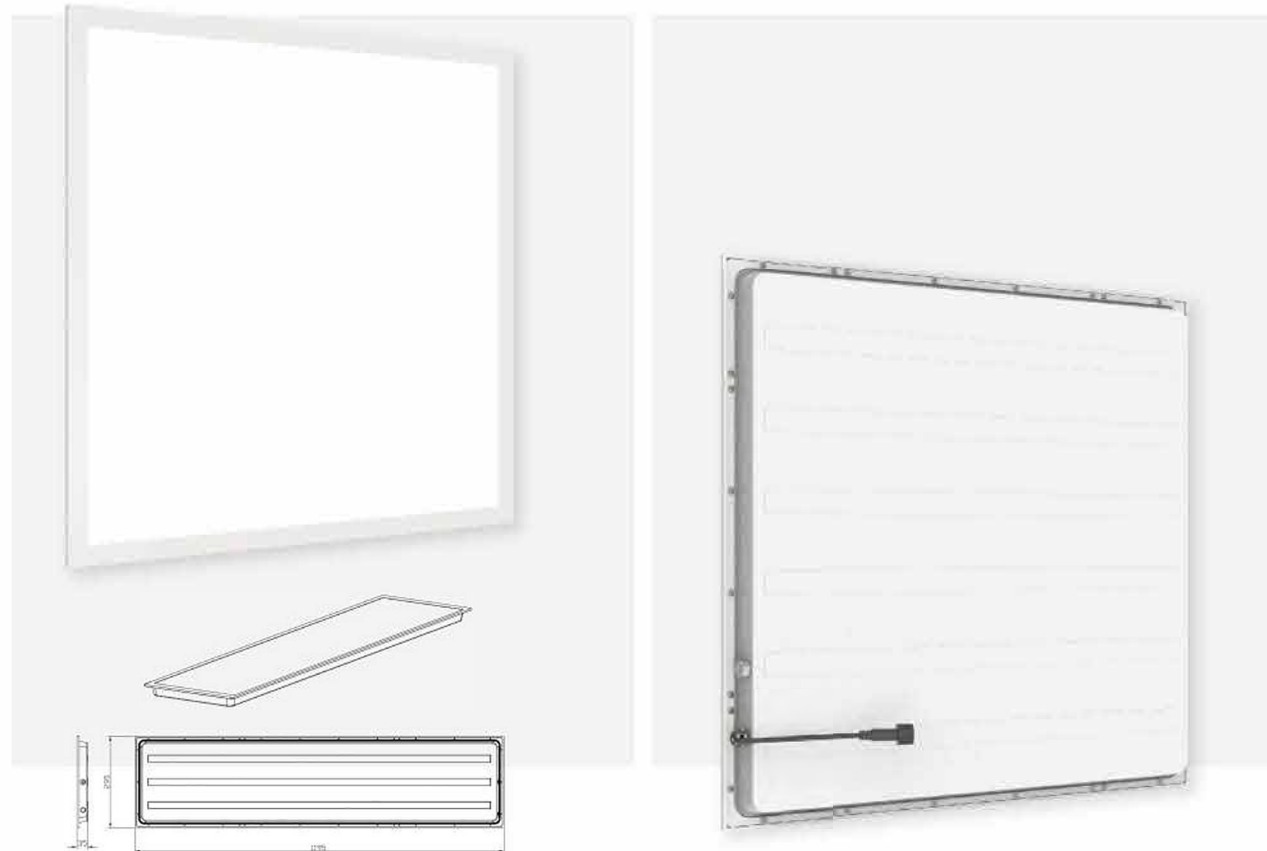


MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
IP65-36W-3600LM-100-22-3000-6500K-595*595*35	36W	3600LM±5%	100	22	3000-6500K	595*595*35
IP65-36W-4320LM-120-22-3000-6500K-595*595*35	36W	4320LM±5%	120	22	3000-6500K	595*595*35
IP65-40W-4000LM-100-22-3000-6500K-595*595*35	40W	4000LM±5%	100	22	3000-6500K	595*595*35
IP65-40W-4800LM-120-22-3000-6500K-595*595*35	40W	4800LM±5%	120	22	3000-6500K	595*595*35
IP65-36W-3600LM-100-22-3000-6500K-295*1195*35	36W	3600LM±5%	100	22	3000-6500K	295*1195*35
IP65-36W-4320LM-120-22-3000-6500K-295*1195*35	36W	4320LM±5%	120	22	3000-6500K	295*1195*35
IP65-40W-4000LM-100-22-3000-6500K-295*1195*35	40W	4000LM±5%	100	22	3000-6500K	295*1195*35
IP65-40W-4800LM-120-22-3000-6500K-295*1195*35	40W	4800LM±5%	120	22	3000-6500K	295*1195*35

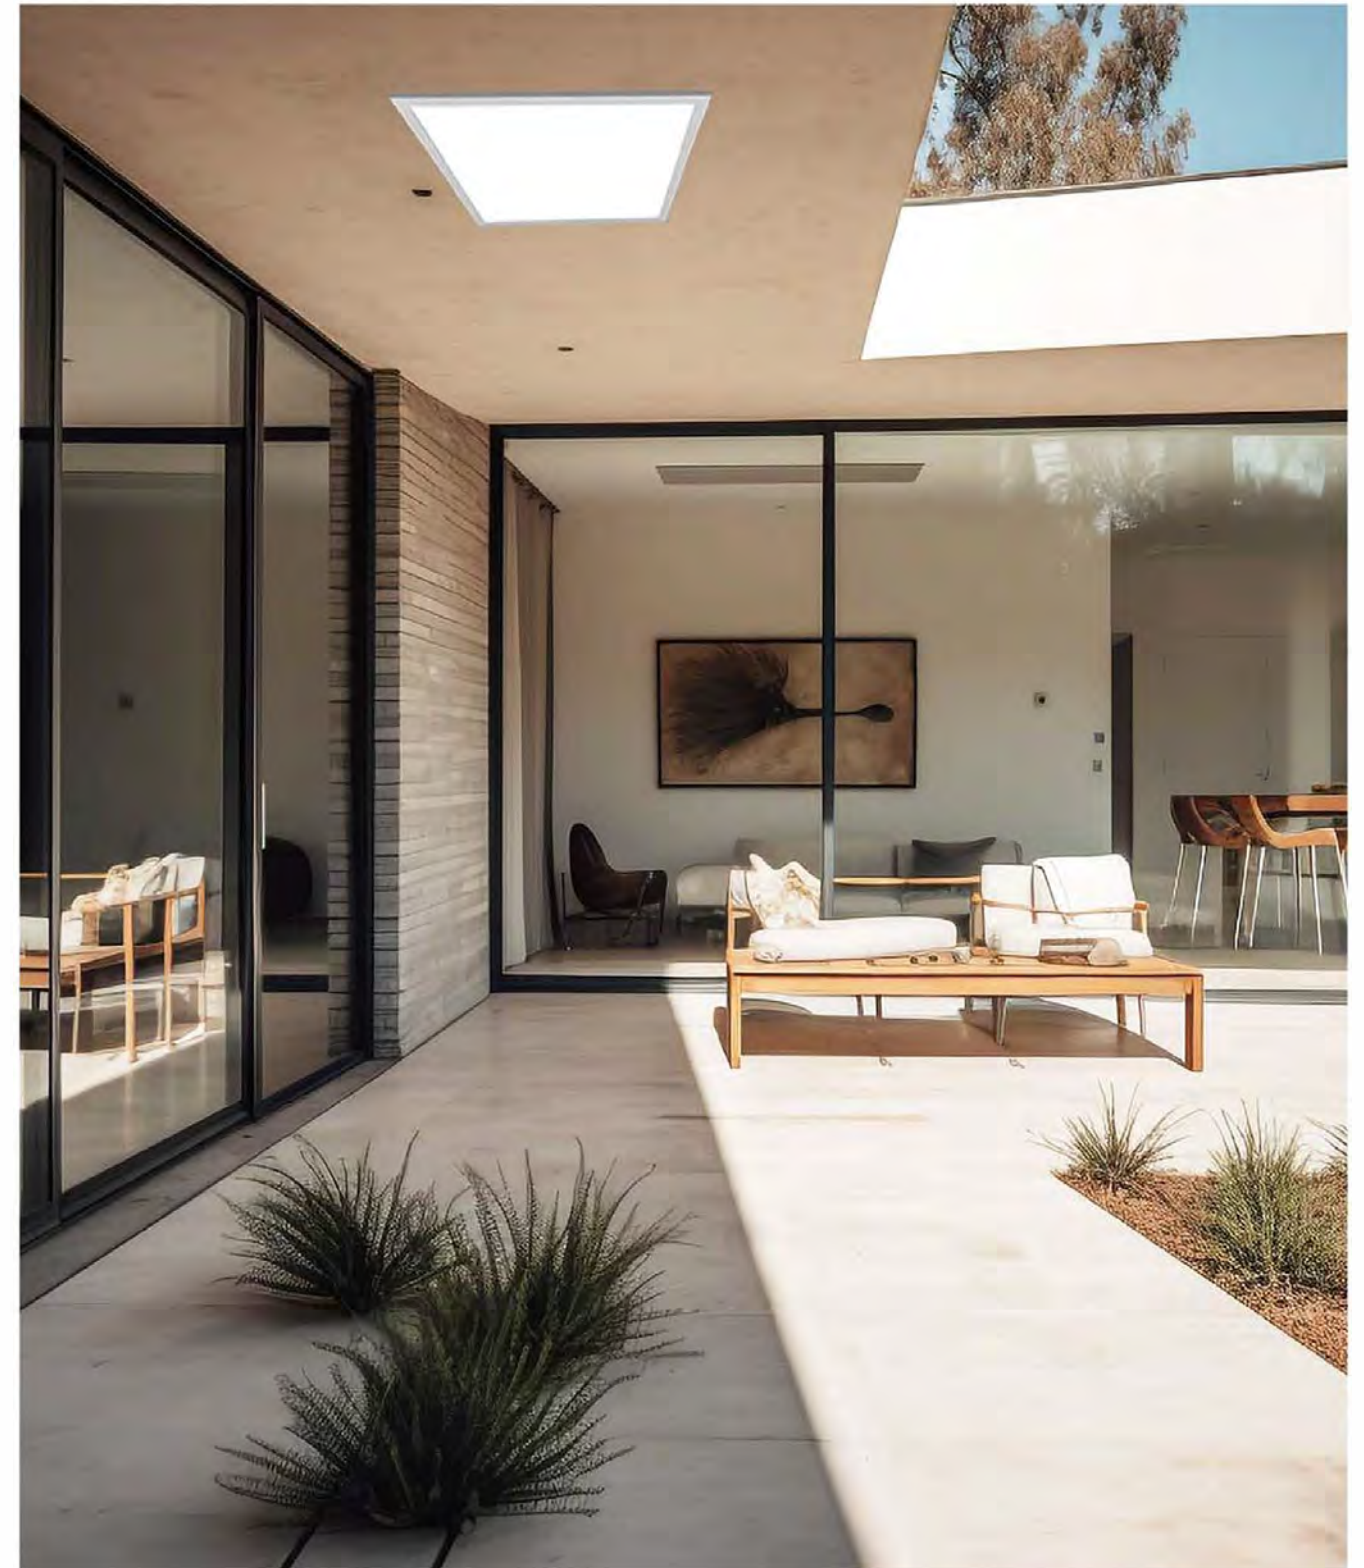

WITH SENSOR

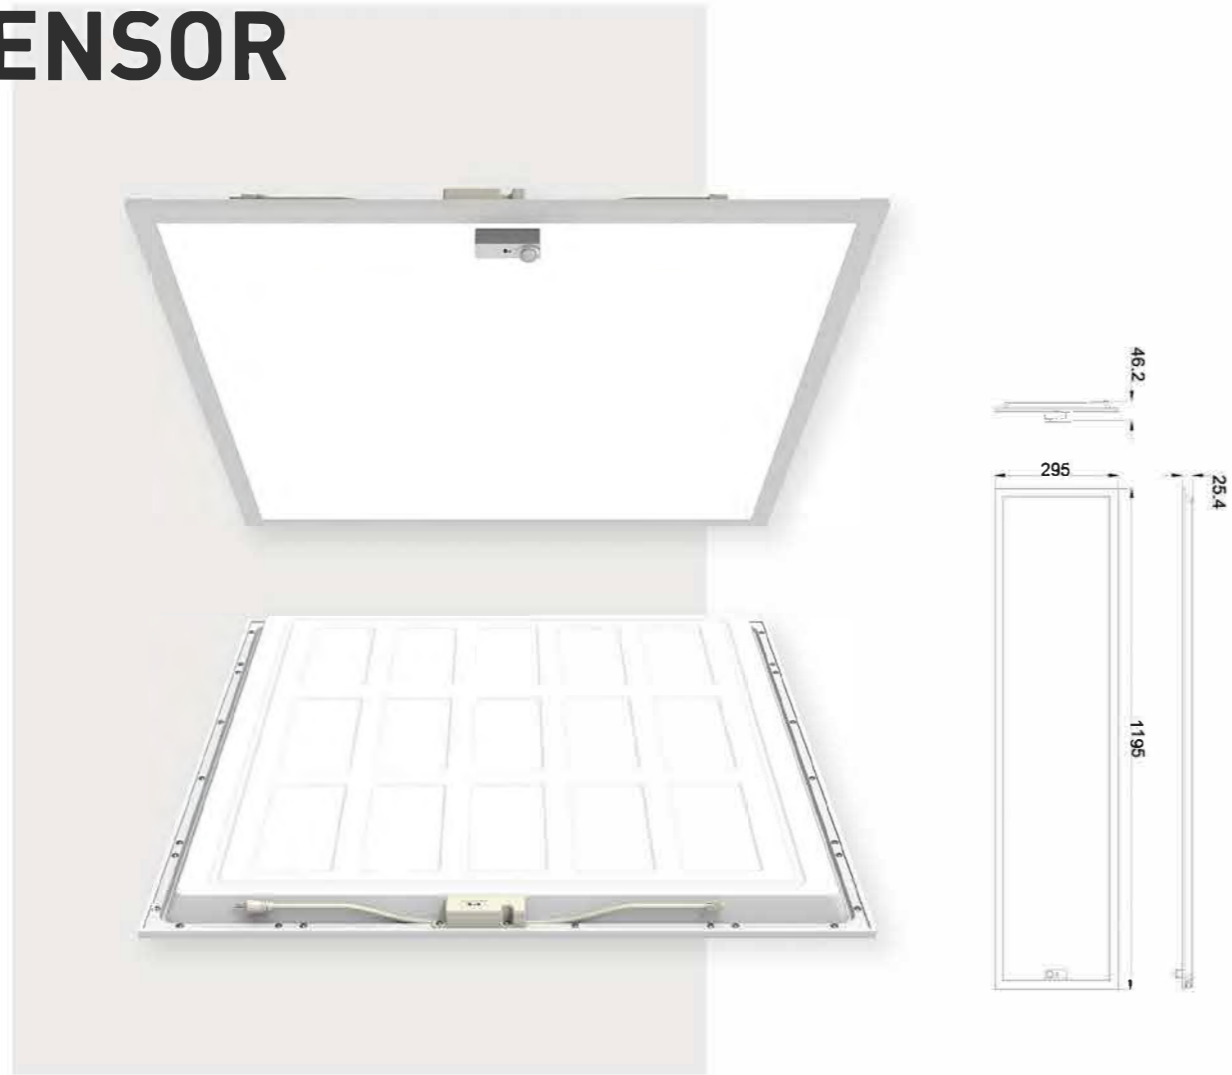


WITH BRACKET

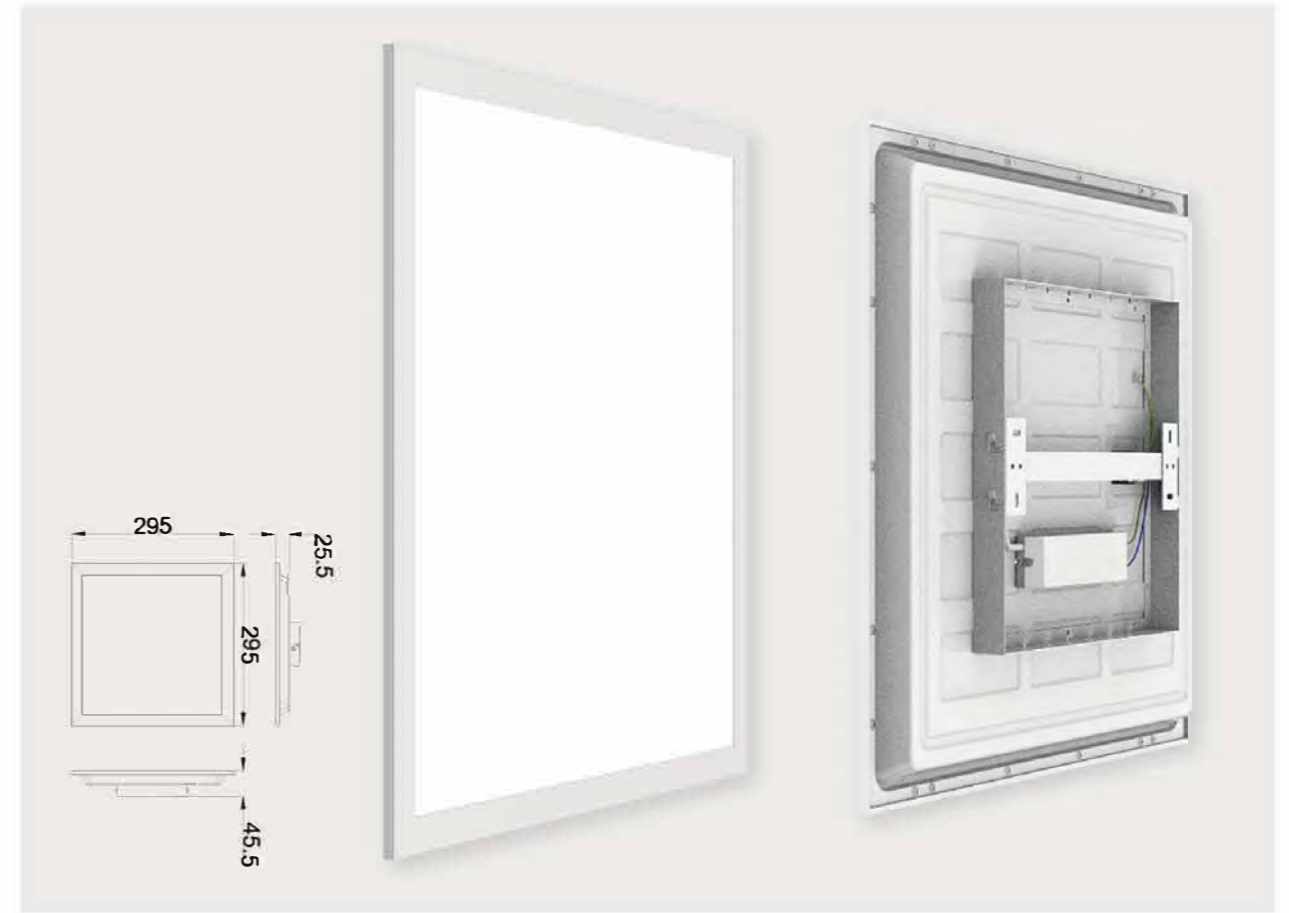

MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
595*595*26	36W	3600LM ±5%	100	22	3000-6500K	595*595*26
595*595*26	36W	4320LM ±5%	120	22	3000-6500K	595*595*26
595*595*26	40W	4000LM ±5%	100	22	3000-6500K	595*595*26
595*595*26	40W	4800LM ±5%	120	22	3000-6500K	595*595*26
295*1195*26	36W	3600LM ±5%	100	22	3000-6500K	295*1195*26
295*1195*26	36W	4320LM ±5%	120	22	3000-6500K	295*1195*26
295*1195*26	40W	4000LM ±5%	100	22	3000-6500K	295*1195*26
295*1195*26	40W	4800LM ±5%	120	22	3000-6500K	295*1195*26


MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
295*295*48	18W	1440LM ±5%	80	22	3000-6500K	295*295*48
450*450*48	24W	2400LM ±5%	100	22	3000-6500K	450*450*48
200*800*48	24W	2160LM ±5%	90	22	3000-6500K	200*800*48
250*1000*48	24W	2400LM ±5%	100	22	3000-6500K	250*1000*48
595*595*48	36W	3600LM ±5%	100	22	3000-6500K	595*595*48
295*1195*48	36W	3600LM ±5%	100	22	3000-6500K	295*1195*48

ROOM

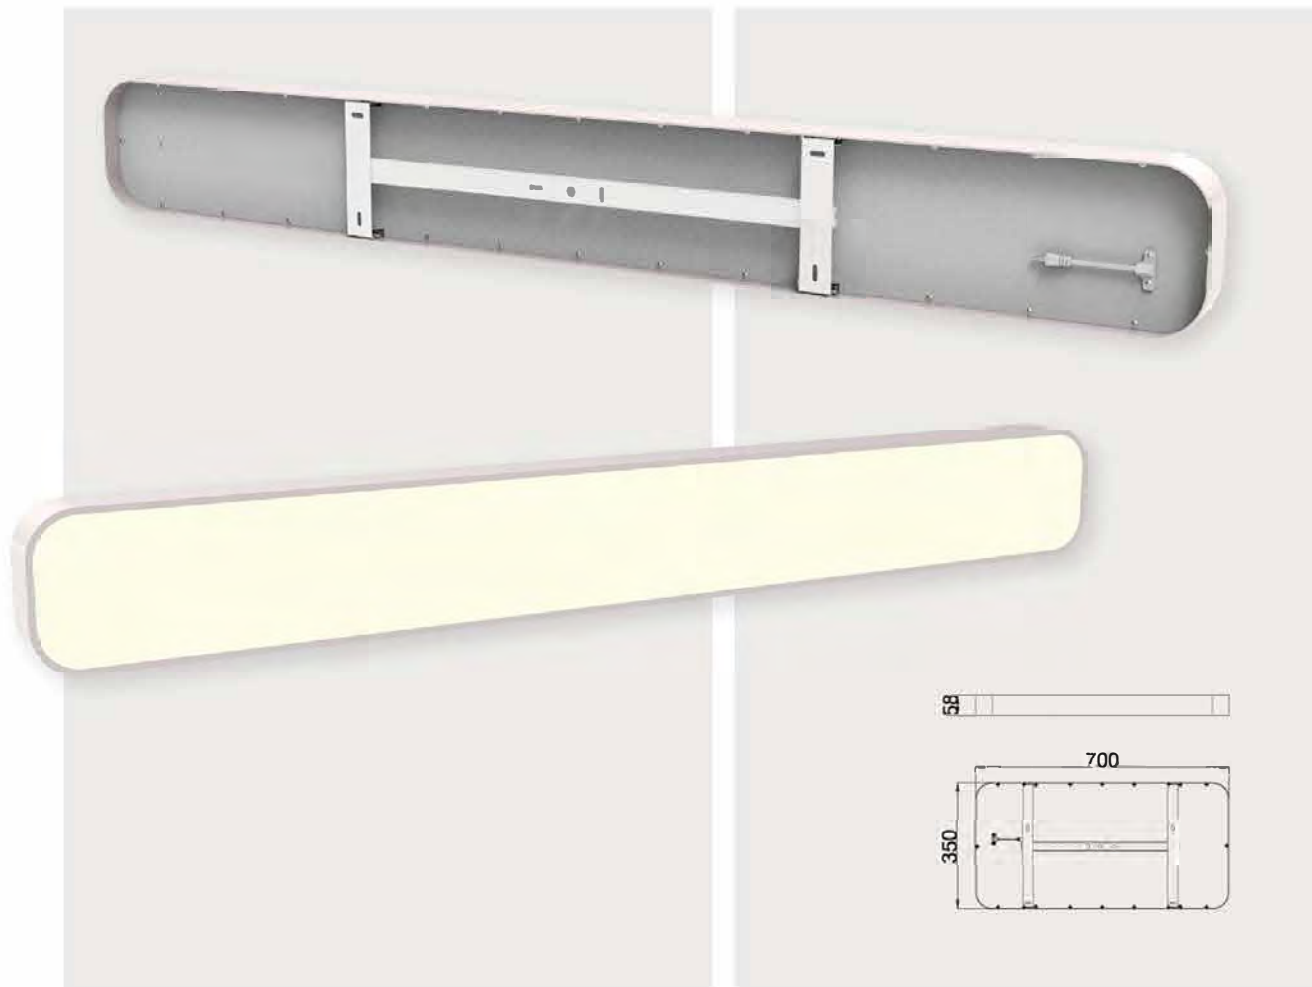


	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
	25W	2500LM±5%	100	22	3000-6500K	145*505*58
	50W	5000LM±5%	100	22	3000-6500K	350*700*58
	50W	5000LM±5%	100	22	3000-6500K	145*1158*58

HIGH EFFICIENCY

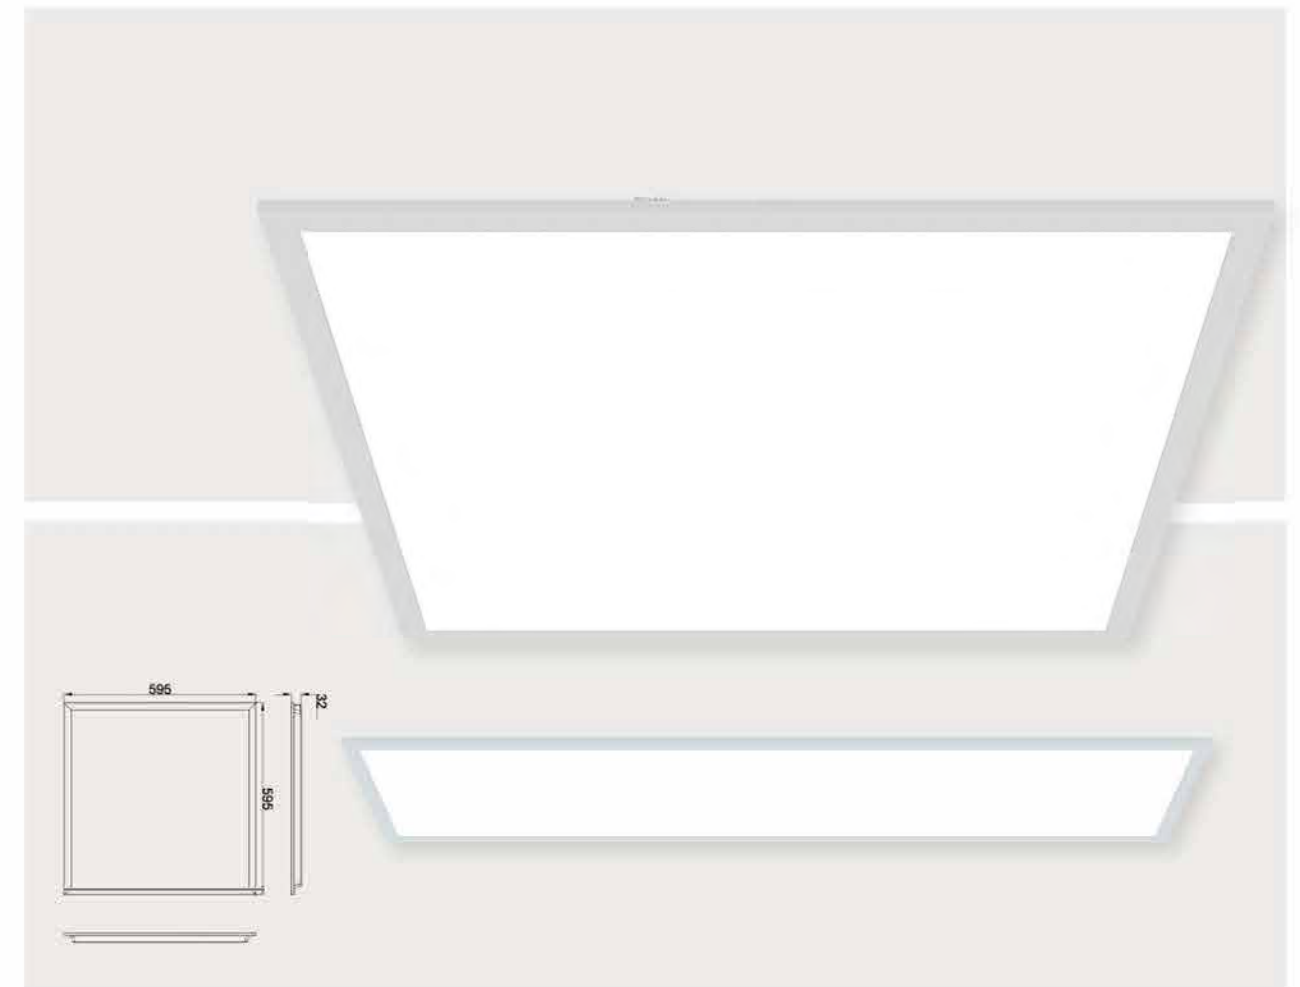


	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
	25W	4000LM±5%	160	22	4000-6500K	595*595*32
	25W	4000LM±5%	160	22	4000-6500K	620*620*32
	25W	4000LM±5%	160	22	4000-6500K	295*1195*32
	50W	8000LM±5%	160	22	4000-6500K	595*1195*32
	25W	3750LM±5%	150	19/22	4000-6500K	595*595*32
	25W	3750LM±5%	150	19/22	4000-6500K	620*620*32
	25W	3750LM±5%	150	19/22	4000-6500K	295*1195*32
	40W	6000LM±5%	150	19/22	4000-6500K	595*1195*32

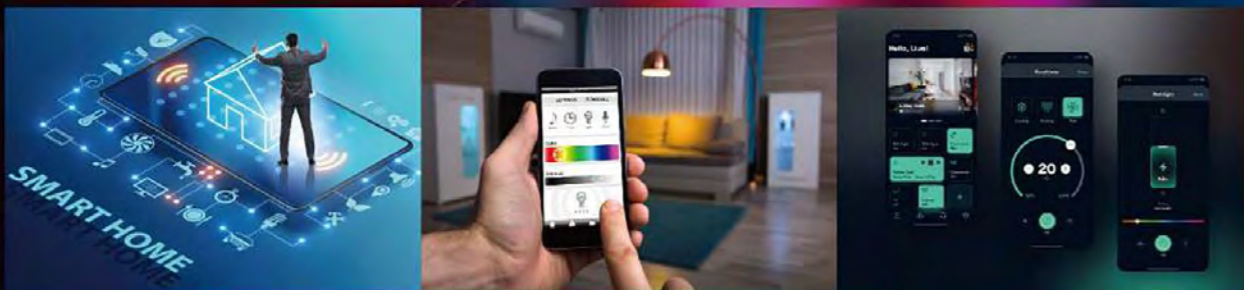

works with the
Google Assistant




WITH BRACKET & FRONT RGB

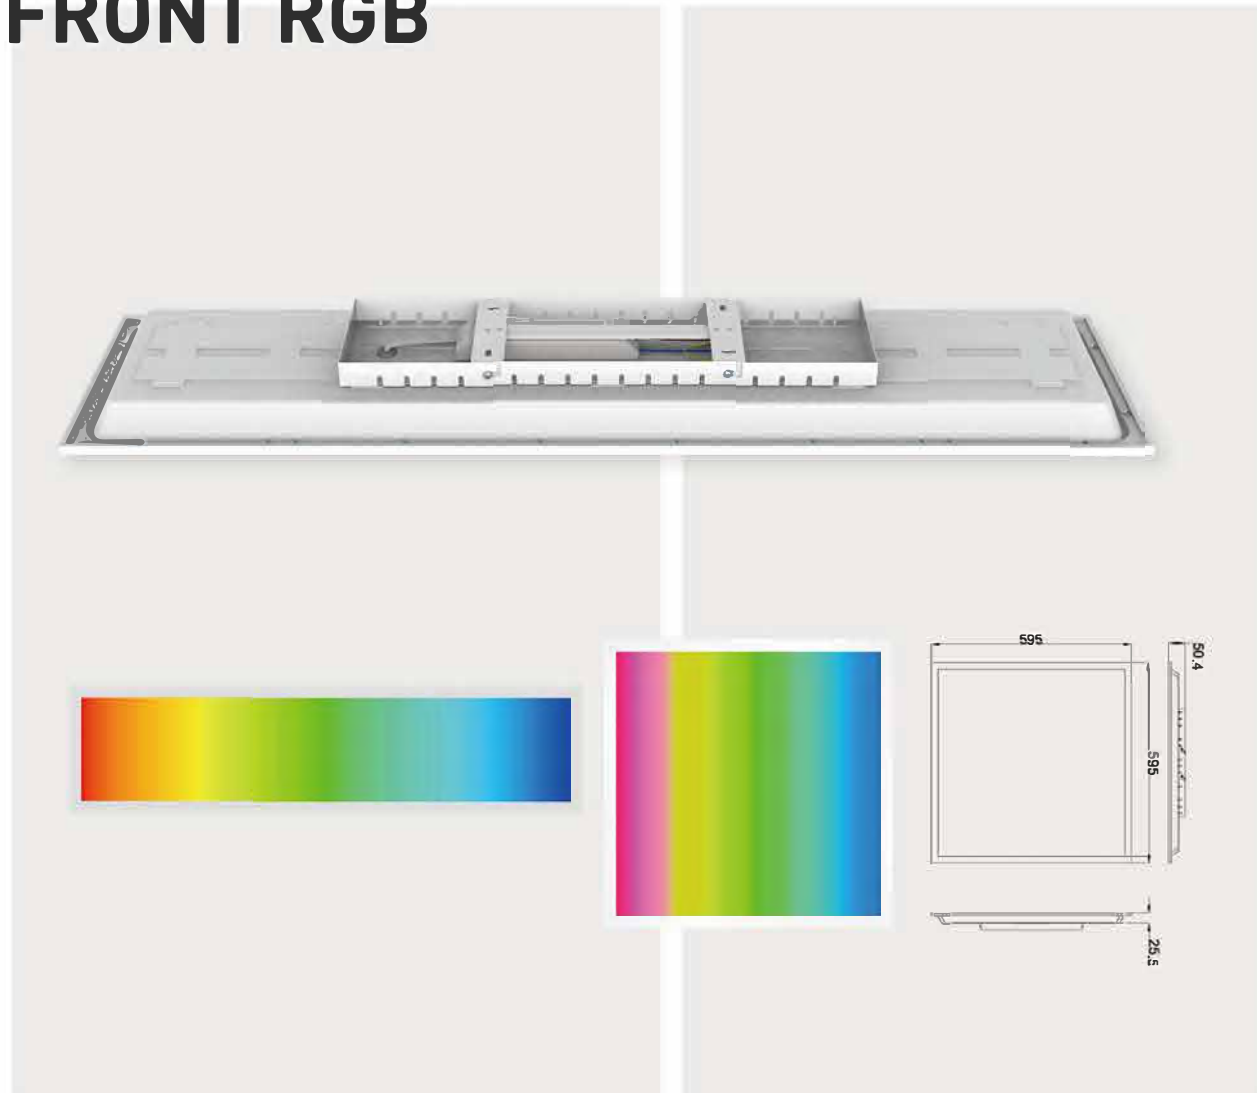

MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
24W-450*450*48	24W	2400LM±5%	100	22	3000-6500K	450*450*48
24W-200*800*48	24W	2160LM±5%	90	22	3000-6500K	200*800*48
24W-250*1000*48	24W	2400LM±5%	100	22	3000-6500K	250*1000*48
36W-595*595*48	36W	3600LM±5%	100	22	3000-6500K	595*595*48
36W-295*1195*48	36W	3600LM±5%	100	22	3000-6500K	295*1195*48


WITH BRACKET & BACK RGB

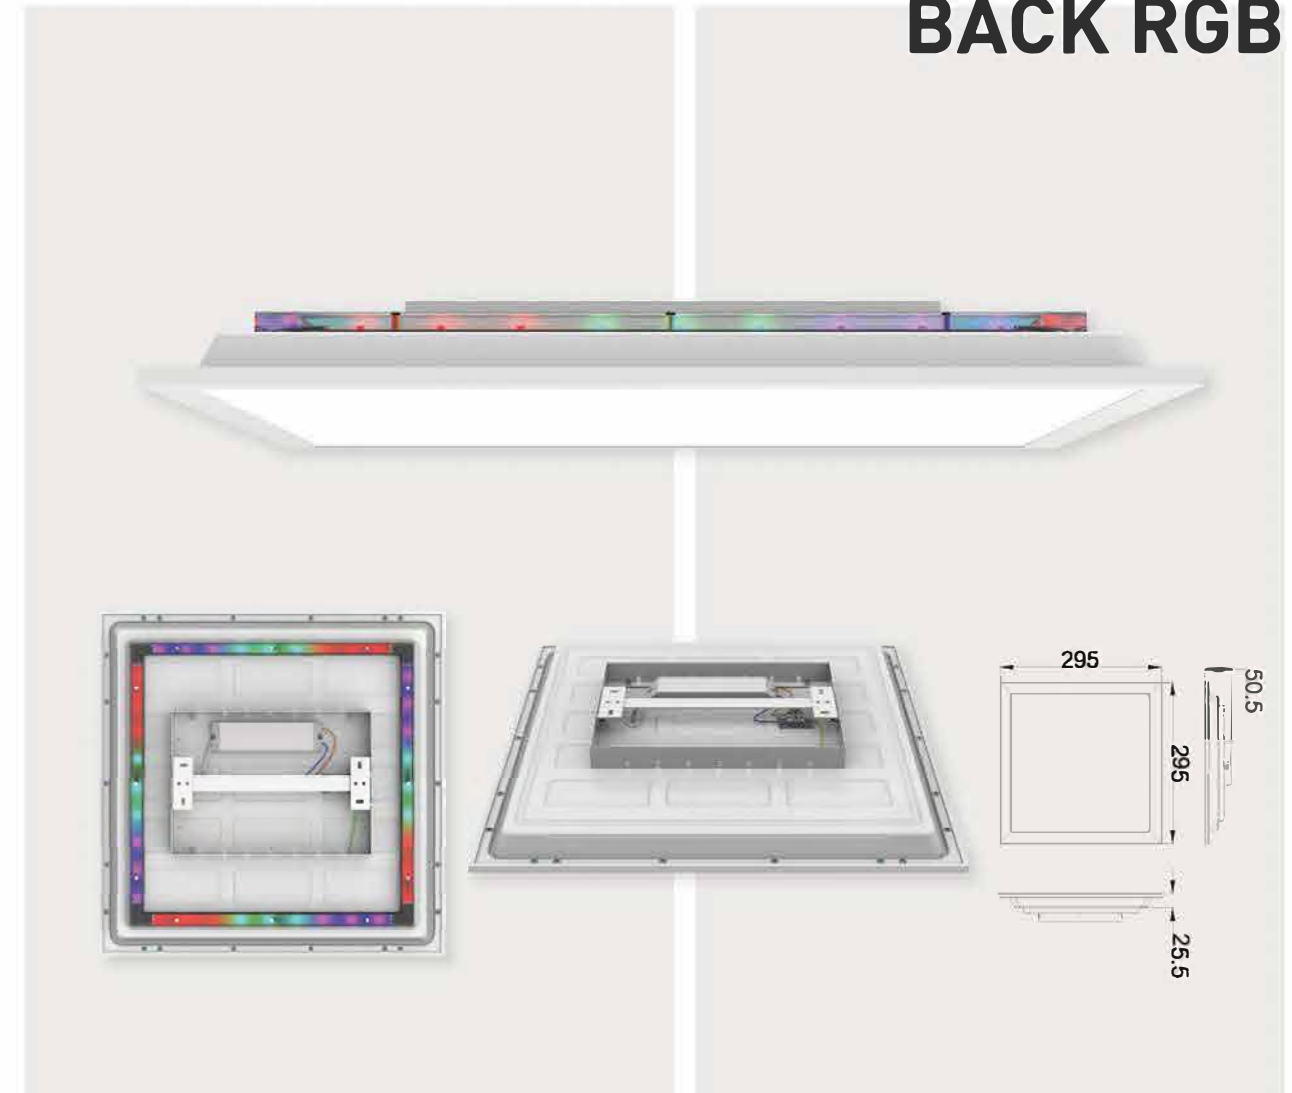

MODEL	POWER RANGE	LUMEN(LM)	LIGHT EFFICIENCY(LM/W)	UGR	CCT	PRODUCT SIZE(MM)
24W-450*450*48	24W	2400LM±5%	100	22	3000-6500K	450*450*48
24W-200*800*48	24W	2160LM±5%	90	22	3000-6500K	200*800*48
24W-250*1000*48	24W	2400LM±5%	100	22	3000-6500K	250*1000*48
36W-595*595*48	36W	3600LM±5%	100	22	3000-6500K	595*595*48
36W-295*1195*48	36W	3600LM±5%	100	22	3000-6500K	295*1195*48


ACCESSORIES AND INSTALLATION

Recessed In A Cut-Out Hole

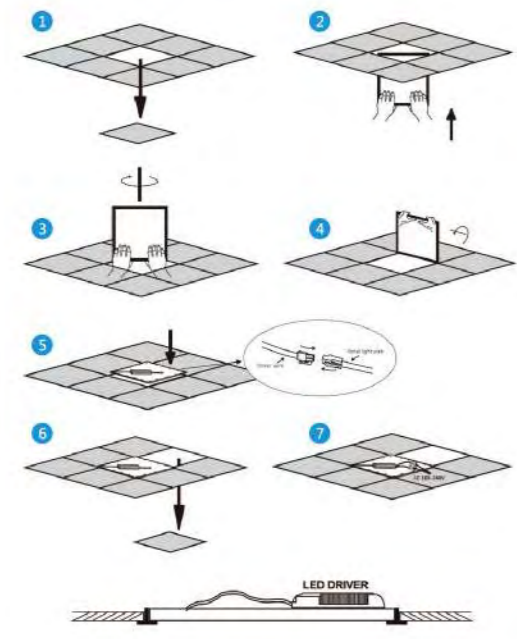


Suspension

Accessories	3030	3060	4060	6030	6060
AC100-240V	X 2			X 3	
3030-0000	X 2			X 3	
3030-0000	X 4			X 6	
3030-0000	X 2			X 3	
3030-0000	X 2			X 3	

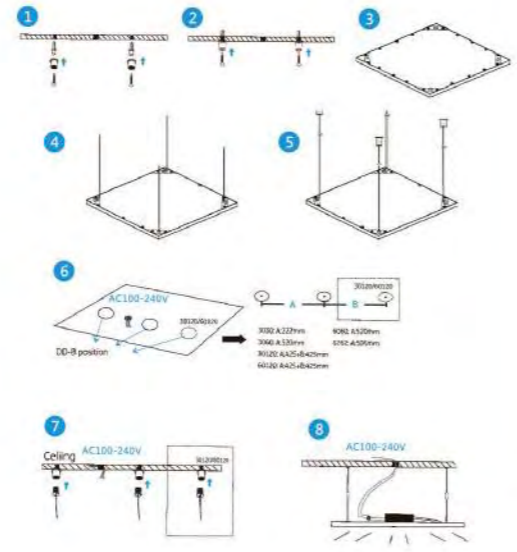


Frame Mounted

Accessories	3030	3060	4060	6030	6060
Frame A	X 2			X 2	
Frame B	X 2			X 2	
3030-0000	X 8			X 8	
3030-0000	X 4			X 6	

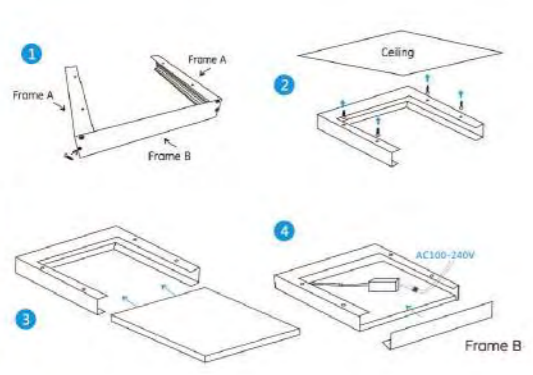

Spring Kit

Spring Kit	X 4	X 6
------------	-----	-----

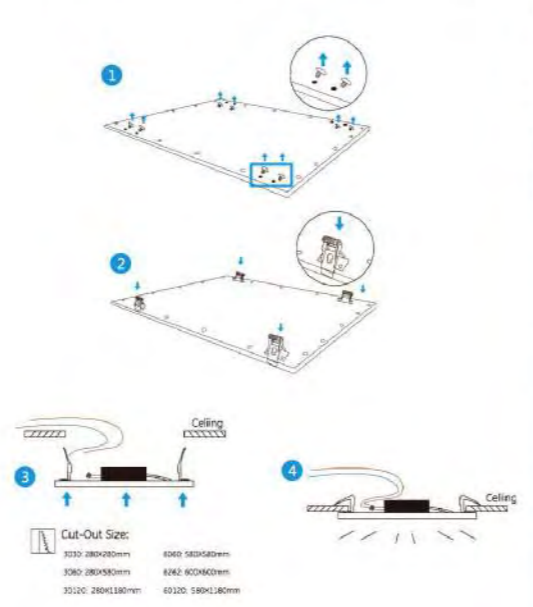


Cut-Out Size:

3030: 280x280mm	4060: 540x540mm
3060: 280x300mm	4060: 600x600mm
3030: 280x130mm	6030: 580x130mm

Easy Surface Mounting Kit

Accessories	3030	3060	4060	6030	6060
AC100-240V	X 8			X 3	
3030-0000	X 4			X 3	
3030-0000	X 4			X 6	
3030-0000	X 4			X 3	

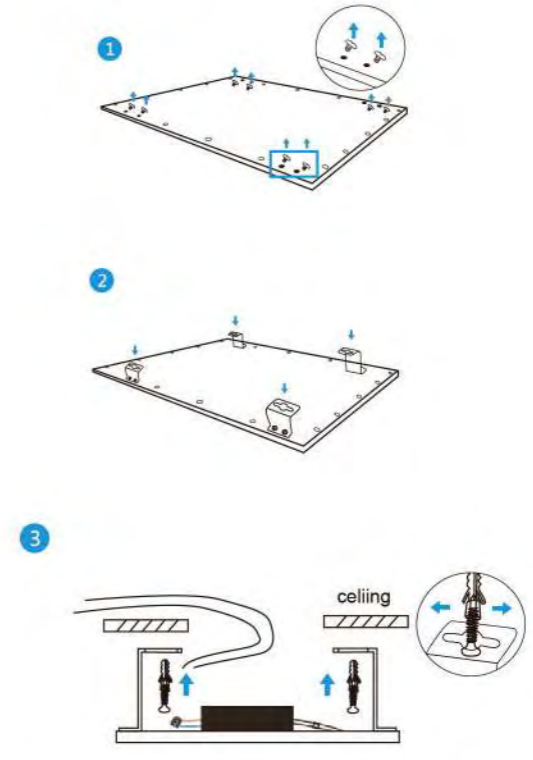

02 HOME LIGHTING



TABLE LAMP



SHINY



Work voltage:5V/1A Max Power:2W
Lumen:240lm
Protection class:IP44
Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
With 1M 5V Type-c+USB wire
With 2600mA*1 rechargeable lithium battery
Material: ABS (shade), PC (diffuser) , Metal (pole) ,ABS (base)


SHINY




Work voltage:5V/1A Max Power:2W
Lumen:240lm
Protection class:IP44
Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
With 1M 5V Type-c+USB wire
With 2600mA*2 rechargeable lithium battery
Material: Metal (shade,Pole,base), PC (diffuser)




WUOLAN
LAMP

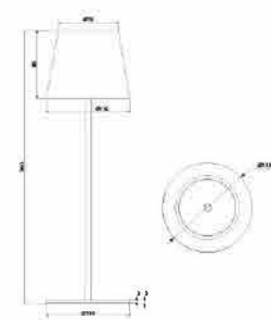


Work voltage:5V/1A Max Power:2W
 Lumen:240lm
 Protection class: IP44
 Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 2600mA*2 rechargeable lithium battery
 Material: Metal (shade, Pole, base), PC (diffuser)

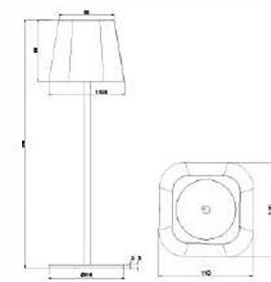

Work voltage: 5V/1A Max Power: 2W
 Lumen: 240lm
 Protection class: IP44
 Touch switch controls 3 modes (On / Dimming / Off) and CCT (3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 2600mA*2 rechargeable lithium battery
 Material: Metal (shade, Pole, base), PC (diffuser)

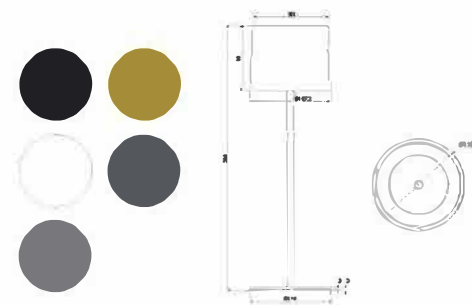

Work voltage:5V/1A Max Power:2W
 Lumen:240lm
 Protection class:IP44
 Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 2600mA*2 rechargeable lithium battery
 Material: Metal (shade, Pole, base), PC (diffuser)

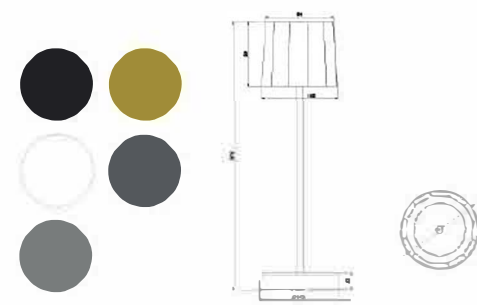


Work voltage:5V/1A Max Power:2W
 Lumen:240lm
 Protection class:IP44
 Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 2600mA*2 rechargeable lithium battery
 Material:ABS(shade, base), Metal (Pole), PC (diffuser)



Work voltage: 5V/1A Max Power: 2W
 Lumen: 240lm
 Protection class: IP44
 Touch switch controls 3 modes (On / Dimming / Off) and CCT (3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 2000mA*2 rechargeable lithium battery
 Material: PE (shade), Metal (pole, base)




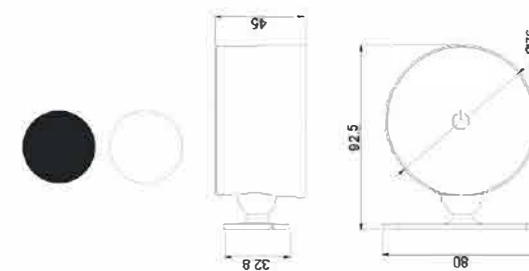

Work voltage: 5V/1A Max Power: 1.5W
 Lumen: 160lm
 Protection class: IP20
 Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 1200mA*2 rechargeable lithium battery
 Material: ABS (shade), PC(diffuser)




Lighting
Lamp

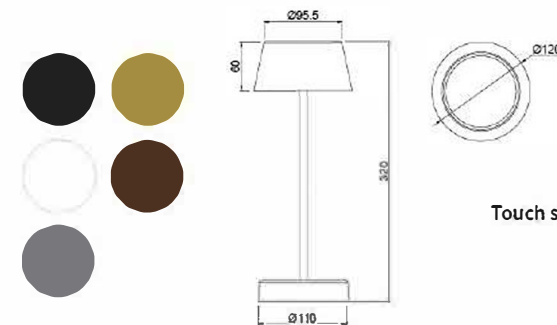


Work voltage: 5V/1A Max Power: 2W
 Lumen: 240lm
 Protection class: IP44
 Touch switch controls 3 modes (On / Dimming / Off) and CCT (3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 1800mA*2 rechargeable lithium battery
 Material: ABS(shade,base), Metal (Pole), PC(diffuser)

Lighting
Lamp

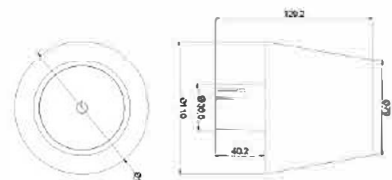

Work voltage:5V/1A Max Power:2W
Lumen:240lm
Protection class:IP44
Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
With 1M 5V Type-c+USB wire
With 2600mA*2 rechargeable lithium battery
Material: Metal (shade,base), PC (diffuser)


Lighting
Lamp

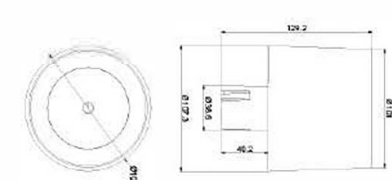

Work voltage:5V/1A Max Power:2W
Lumen:240lm
Protection class:IP44
Touch switch controls 3 modes (On / Dimming / Off) and CCT(3000K-4000K-6000K)
With 1M 5V Type-c+USB wire
With 2600mA*2 rechargeable lithium battery
Material: Metal (shade,base), PC (diffuser)





Work voltage: 5V/1A Max Power: 2W
 Lumen: 240lm
 Protection class: IP20
 Touch switch controls 3 modes (On / Dimming / Off) and CCT (3000K-4000K-6000K)
 With 1M 5V Type-c+USB wire
 With 1200mA*1 rechargeable lithium battery
 Material: Metal (shade, base), PC (diffuser)

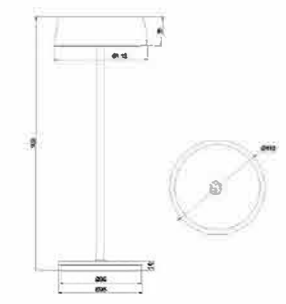

Work voltage: 5V/1A Max Power: 2W
Lumen: 240lm
Protection class: IP44
Touch switch controls 3 modes (On / Dimming / Off)
With 1M 5V Type-c+USB wire
With 1200mA*2 rechargeable lithium battery
Material: Metal (shade, Pole, base), PC (diffuser)





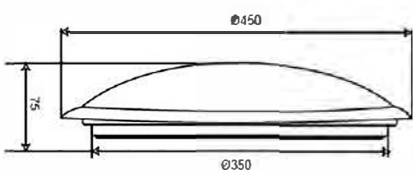



Power Range	Lumen(lm)	Product size(mm)	Ip Rating
24W	1920LM	φ450*75	IP20
36W	2880LM	φ570*80	IP20




ELECTRIC LIGHTING EFFECT







Power Range	Lumen(Lm)	Product Size(Mm)	Ip Rating
24W	1920LM	φ390*75	IP20
36W	2880LM	φ490*75	IP20
45W	3600LM	φ595*75	IP20

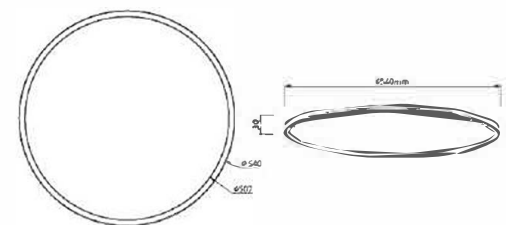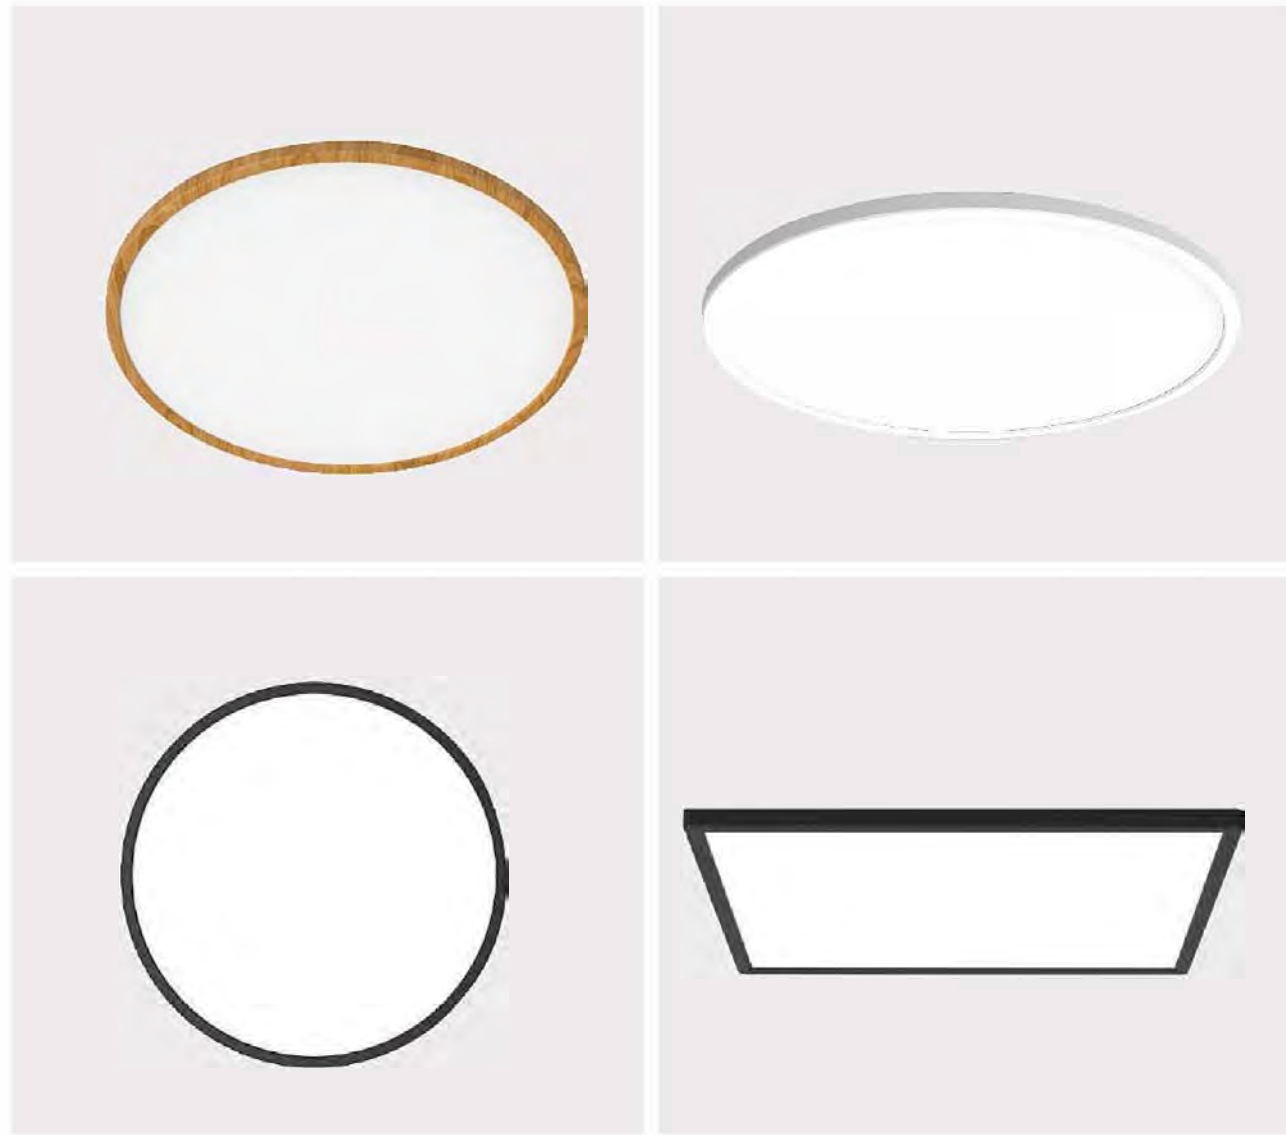

	Power Range	Lumen(Lm)	Product Size(Mm)	Ip Rating
	18W	1800LM	φ293*26	IP20
	18W	1800LM	293*293*26	IP20
	24W	2400LM	φ420*26	IP20
	24W	2400LM	420*420*26	IP20
	36W	3600LM	φ540*30	IP20

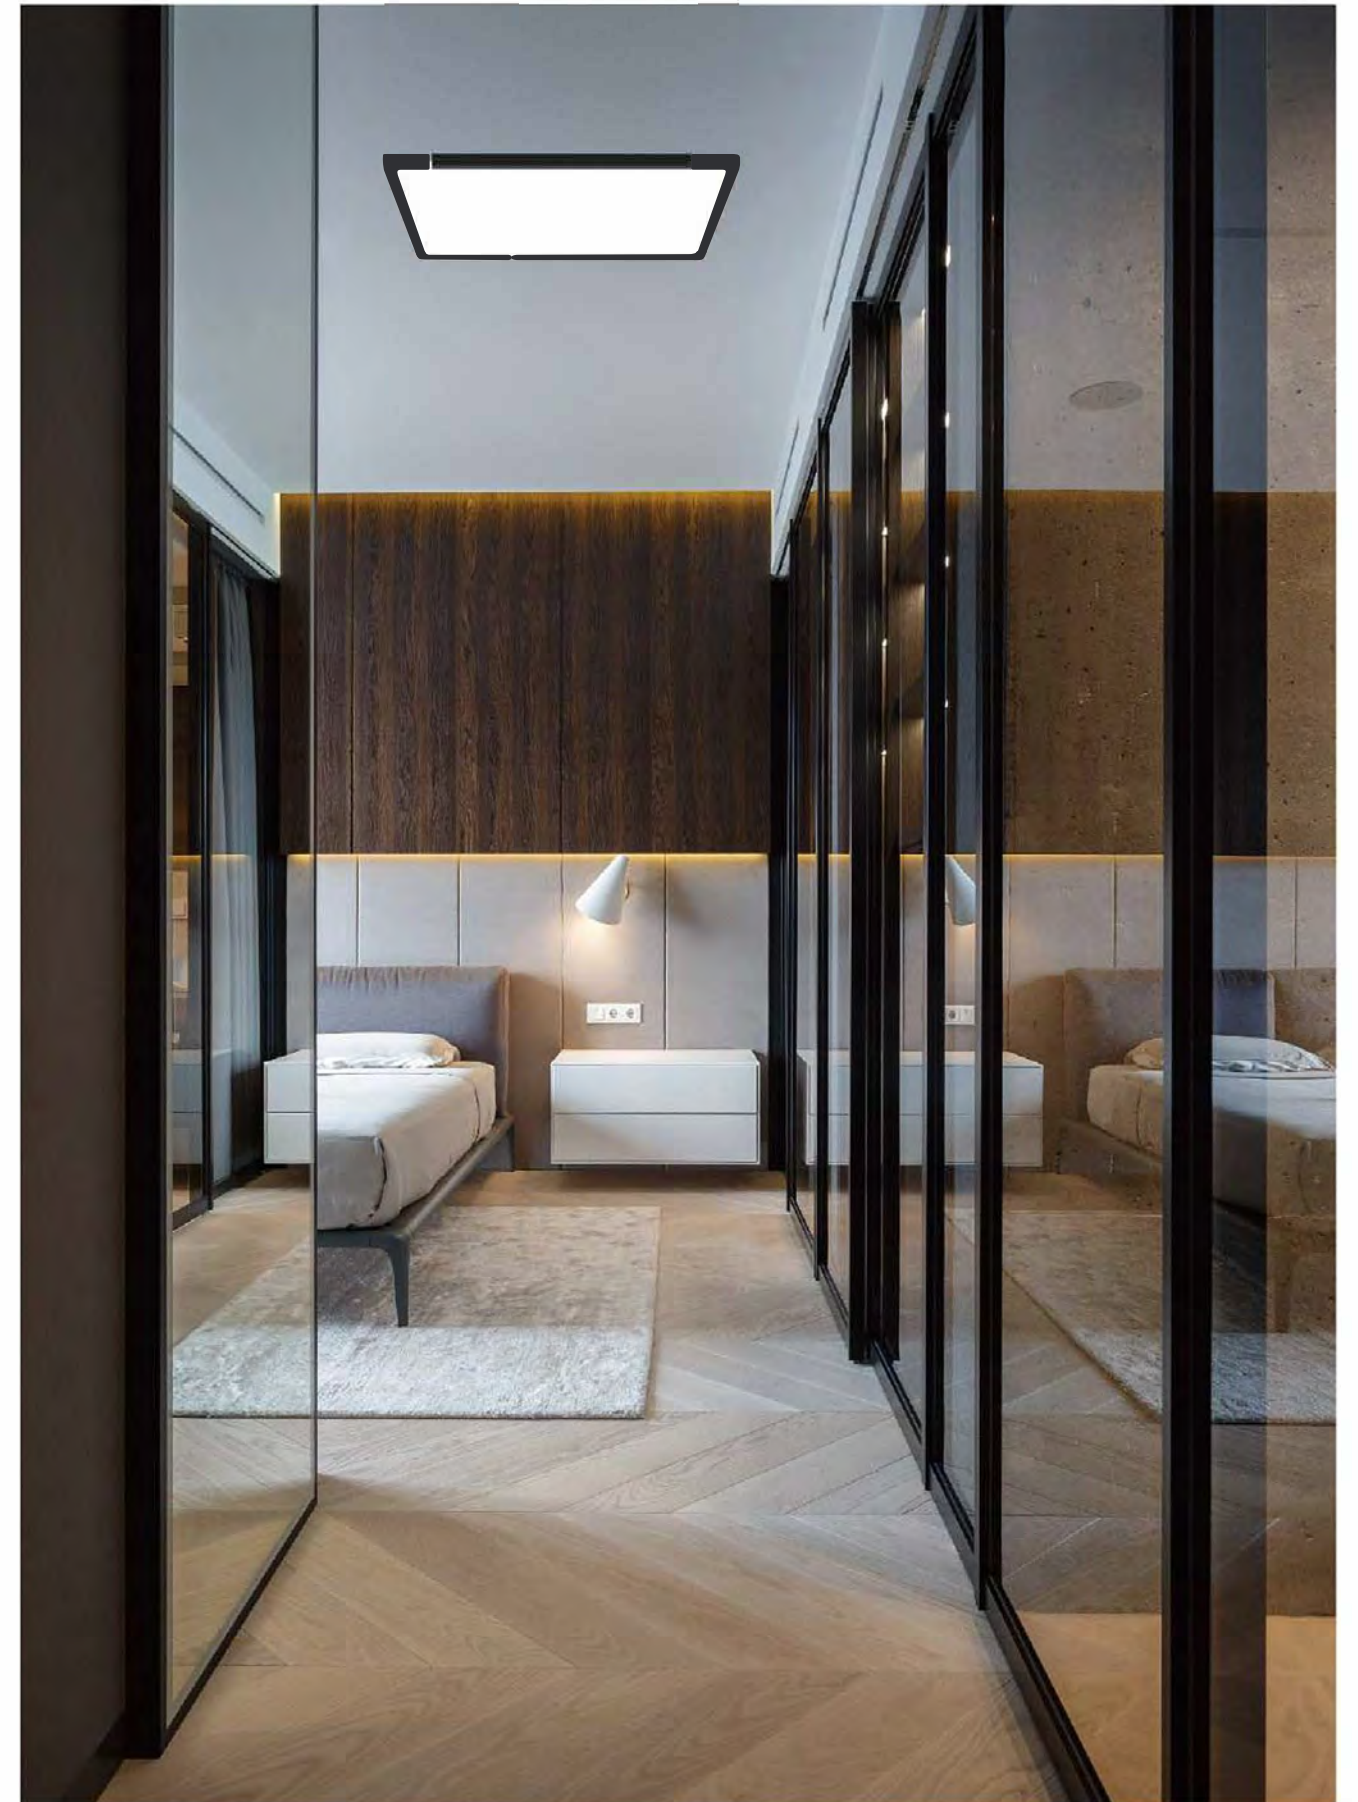

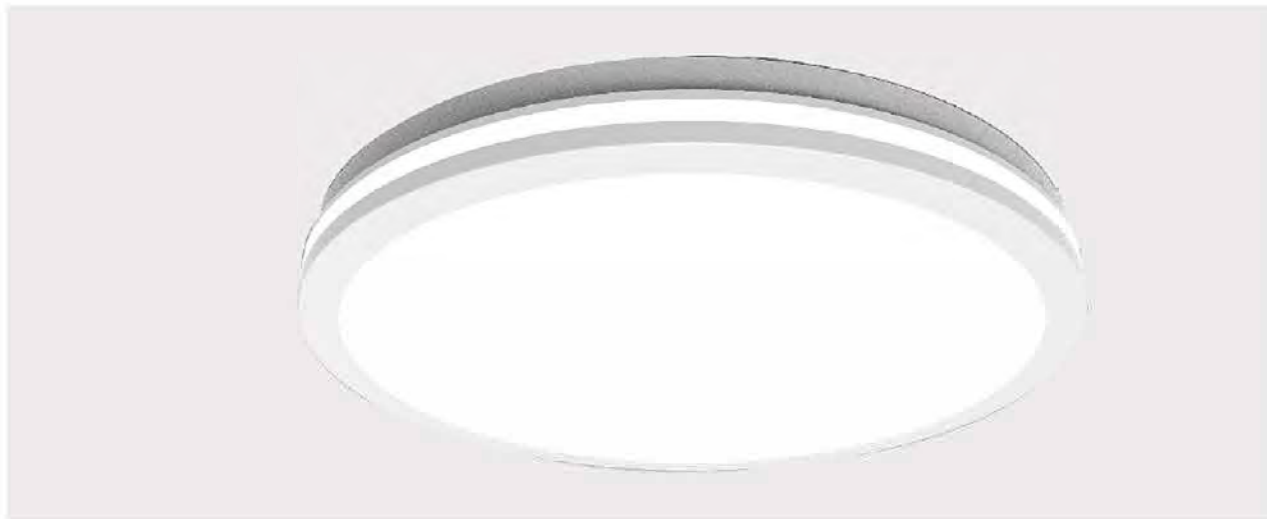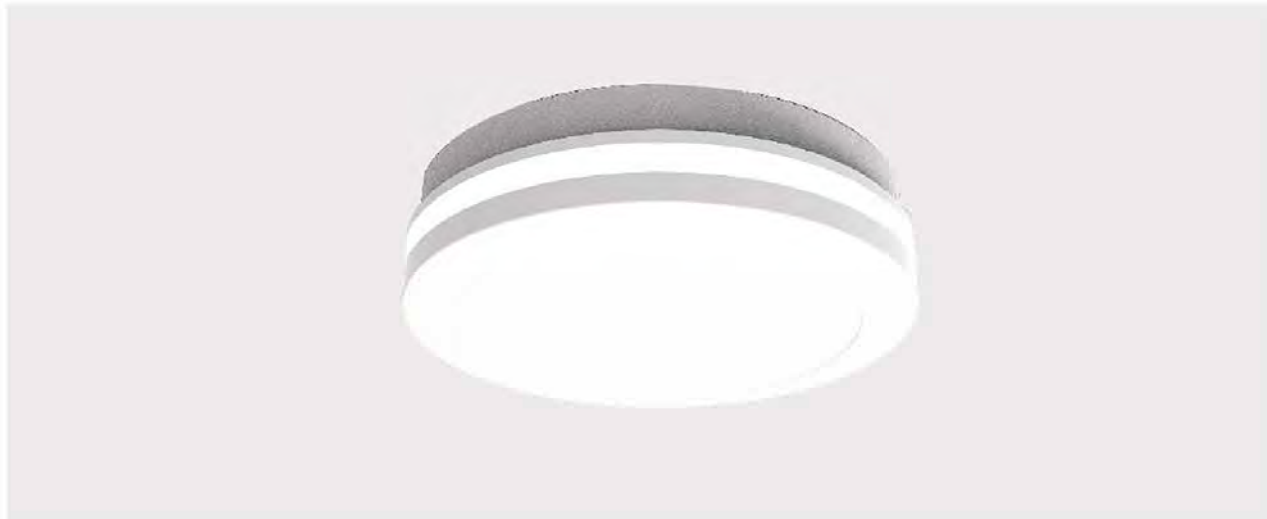


Power Range	Lumen(Lm)	Product Size(Mm)	Ip Rating
12W	960LM	φ180*52	IP20
20W	1440LM	φ220*52	IP20
30W	2700LM	φ300*52	IP20
40W	3600LM	φ400*52	IP20






天光系列
天光系列

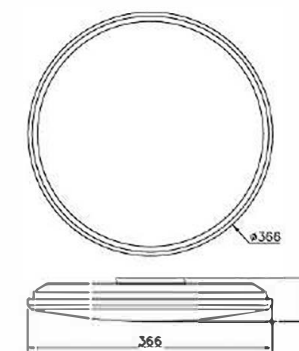


	Power Range	Lumen(lm)	Product size(mm)	Ip Rating
	12W	960LM	φ218*65	IP20
	18W	1440LM	φ218*65	IP20
	24W	1920LM	φ268*65	IP20
	32W	2560LM	φ316*65	IP20
	40W	3200LM	φ368*65	IP20

2020

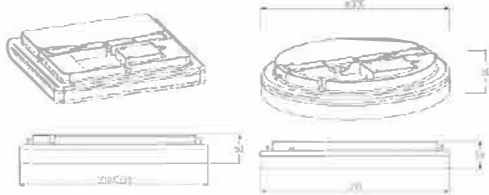

Power Range	Lumen(lm)	Product size(mm)	Ip Rating
12W	1200LM	φ220*50	IP54
12W	1200LM	220*220*50	IP54
18W	1800LM	φ280*50	IP54
18W	1800LM	280*280*50	IP54
24W	2400LM	φ330*50	IP54
24W	2400LM	330*330*50	IP54

2021

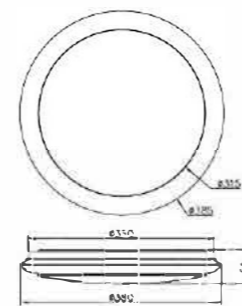

Power Range	Lumen(lm)	Product size(mm)	Ip Rating
12W	960LM	φ260*67	IP20
18W	1440LM	φ330*71	IP20
24W	1920LM	φ380*72	IP20


OYSTER



Power Range	Lumen(lm)	Product size(mm)	Ip Rating
8W	640LM	φ220*63	IP20/44
12W	960LM	φ260*63	IP20/44
12W	960LM	φ290*63	IP20/44
12W	960LM	290*290*63	IP20/44
18W	1800LM	φ330*63	IP20/44
24W	2400LM	φ380*63	IP20/44


Power Range	Lumen(lm)	Product size(mm)	Ip Rating
24W	2400LM	380*380*63	IP20/44
32W	3200LM	φ480*63	IP20/44
32W	3200LM	480*480*63	IP20/44
36W	3600LM	φ580*65	IP20/44
48W	4800LM	φ760*110	IP20/44

WOOD

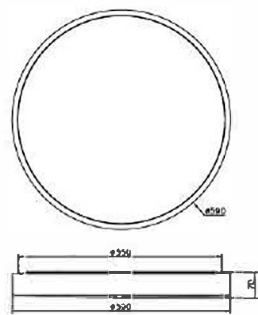

Power Range	Lumen(lm)	Product size(mm)	Ip Rating
12W	960LM	φ260*65	IP20/44
18W	1440LM	φ330*65	IP20/44
24W	2400LM	φ380*65	IP20/44
32W	3200LM	φ480*65	IP20/44
36W	3600LM	φ590*70	IP20/44

SLIMLINE

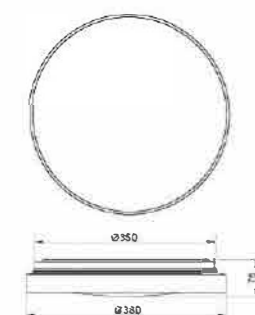

Power Range	Lumen(lm)	Product size(mm)	Ip Rating
12W	960LM	φ260*75	IP20/44
18W	1440LM	φ330*75	IP20/44
24W	2400LM	φ375*75	IP20/44
36W	3600LM	φ475*75	IP20/44
48W	4800LM	φ575*75	IP20/44


2022年
2022年



Power Range	Lumen(lm)	Product size(mm)	Ip Rating
12W	840LM	φ230*65	IP20
18W	1260LM	φ300*65	IP20
24W	1680LM	φ400*65	IP20




3030



Power Range	Lumen(lm)	Product size(mm)	Ip Rating
18W	1440LM	φ330*65	IP20
24W	1920LM	φ380*65	IP20
36W	2880LM	φ480*70	IP20

10.5K10.5K

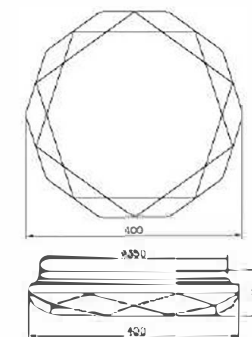

Power Range	Lumen(lm)	Product size(mm)	Ip Rating
12W	960LM	φ260*55	IP20/44
18W	1440LM	φ340*65	IP20/44
24W	2440LM	φ400*75	IP20/44
32W	3200LM	φ500*90	IP20/44
40W	4000LM	φ610*115	IP20/44

03

PROFESSIONAL LIGHTING


- 1.FLOODLIGHT — SPARK, BACKPACK, MOON, AURORA
- 2.HIGH BAY — PASTA, CLOE, RENEWAL
- 3.WORK LIGHT — EKOS, ERIS, MOBY



LED Floodlight




Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (mm)	Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (mm)
10	220-240/100-240	900	120°	104*71.5*27	70	220-240/100-240	6300	120°	232*166*29
20	220-240/100-240	1800	120°	113*86.5*28	100	220-240/100-240	9000	120°	272*180*30
30	220-240/100-240	2700	120	141*106*28	150	220-240/100-240	13500	120°	321*220*30
50	220-240/100-240	4500	120	182*126*28	200	220-240/100-240	18000	120°	362*260*32

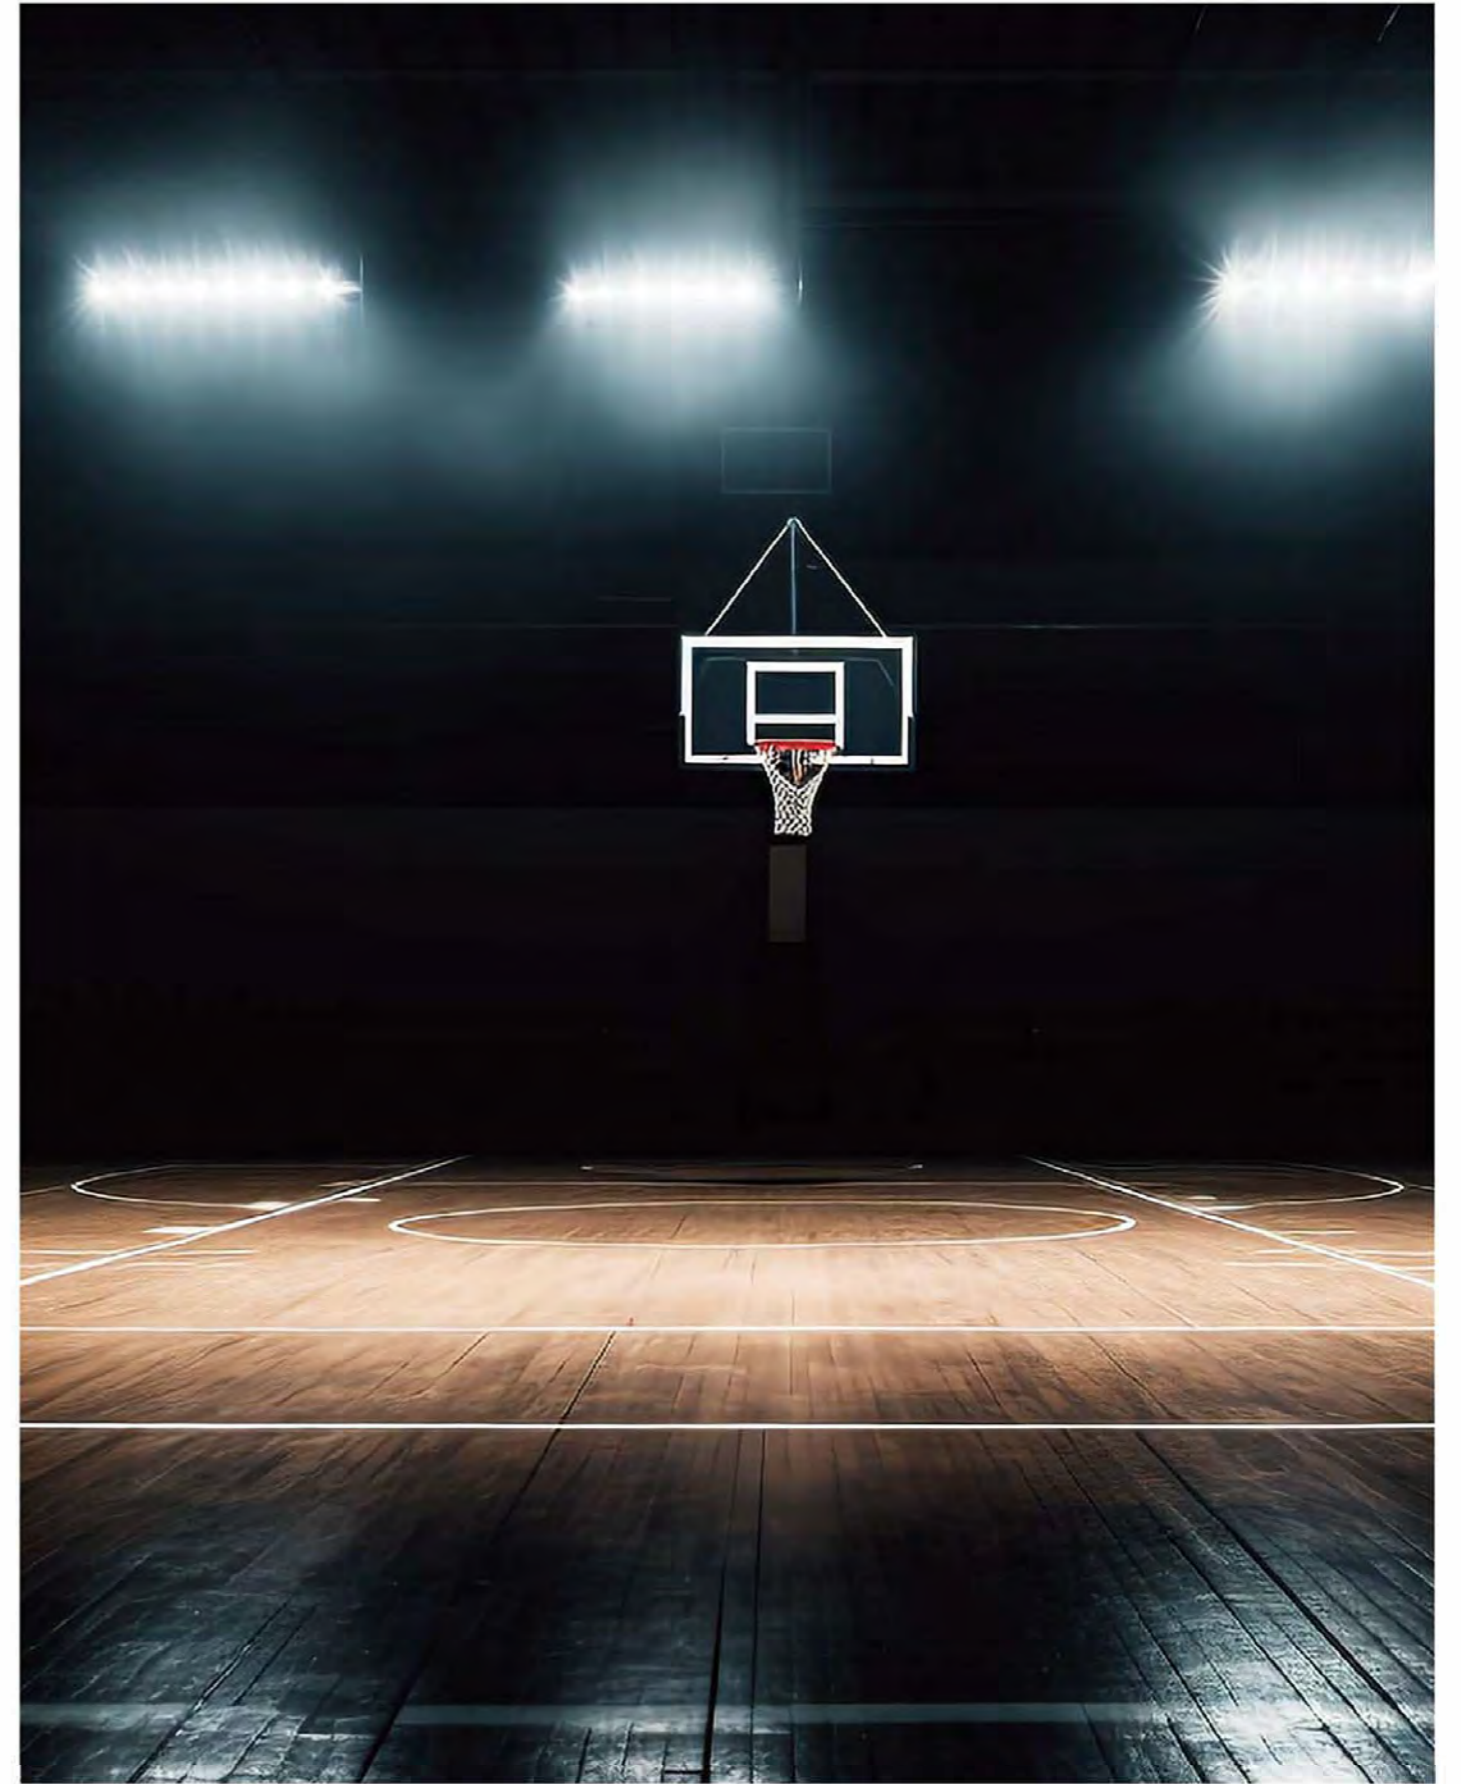




1-FLOODLIGHT

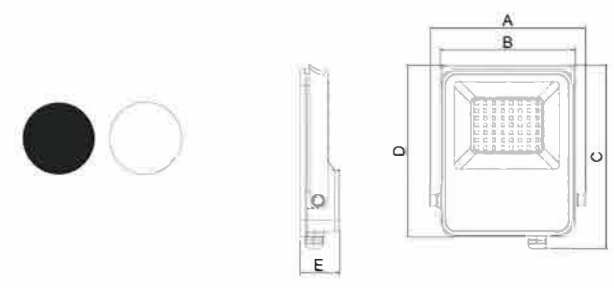

Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (A,C,E) mm
10	220-240	1200	120°	99*113*34
20	220-240	2400	120°	112*137*35
30	220-240	3600	120°	138*163*35
50	220-240	6000	120°	161*194*35



1-FLOODLIGHT

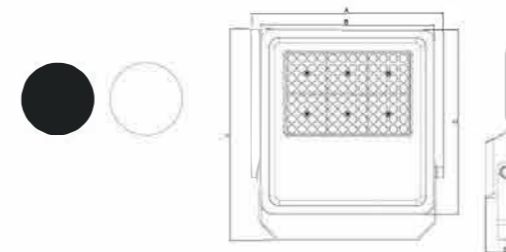




Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (A,C,E) mm
70	100-240	10500	15°30°60°90°120°more	238*262*50
100	100-240	15000	15°30°60°90°120°more	238*328*50
150	100-240	22500	15°30°60°90°120°more	288*345*53
200	100-240	30000	15°30°60°90°120°more	291*395*55

AURORA




Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (A,C,E) mm	Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (A,C,E) mm
10	220-240	1000	90°	136.4*100*25	100	220-240	10000	90°	238.4*192*25
20	220-240	2000	90°	156.4*123*25	150	220-240	15000	90°	261.4*202*25
30	220-240	3000	90°	166.4*133*25	200	220-240	20000	90°	261.4*200*25
50	220-240	5000	90°	196.4*162*25					

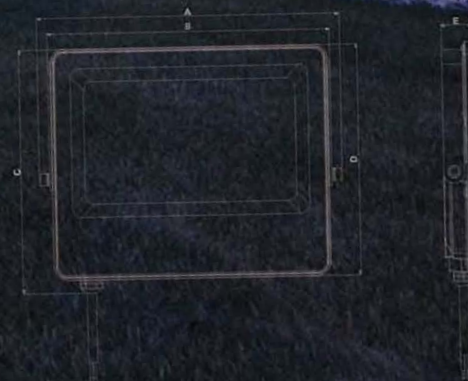



Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (D,B) mm
100	220-240/100-240	10000	90°	φ240*62
150	220-240/100-240	15000	90°	φ280*64
200	220-240/100-240	20000	90°	φ320*65

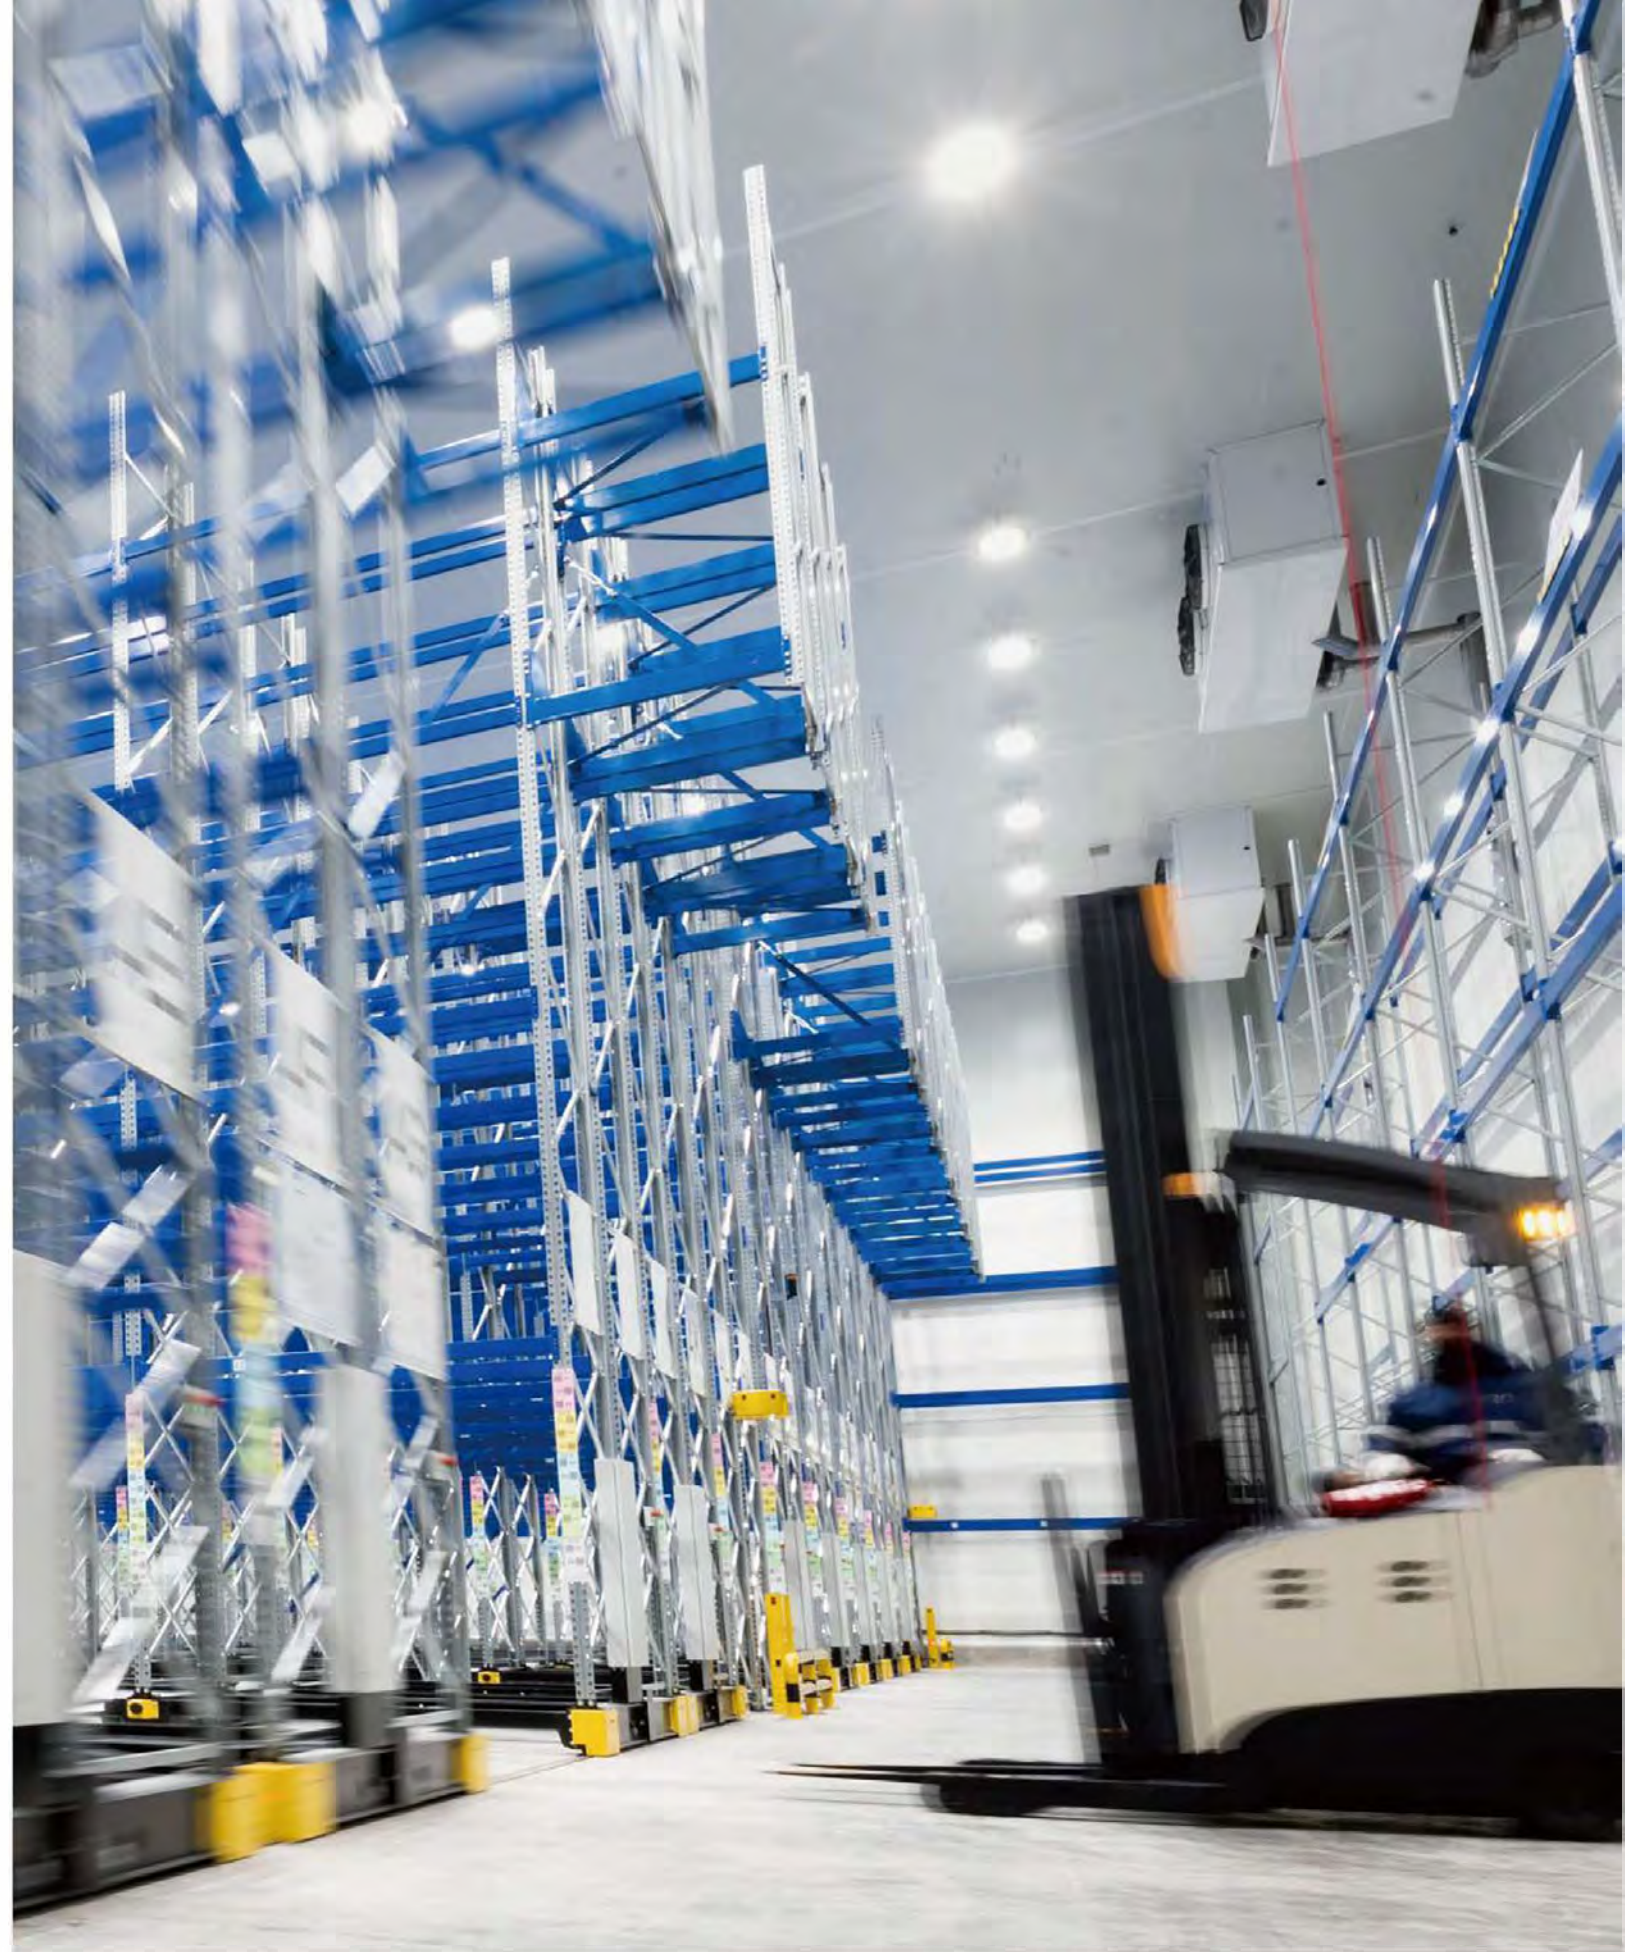




2-HIGH BAY




The UFO Highbay all feature 3-stage color temperature adjustment, 3-satage brightness adjustment.

	LOW Medium High		3000k 4000k 5000k
Adjustable		Adjustable	
3Wait		3CCT	

Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (D,B) mm
100	100-240	17000	60°90°120°	φ222*90
150	100-240	25500	60°90°120°	φ264*90
200	100-240	34000	60°90°120°	φ300*96




High Bay

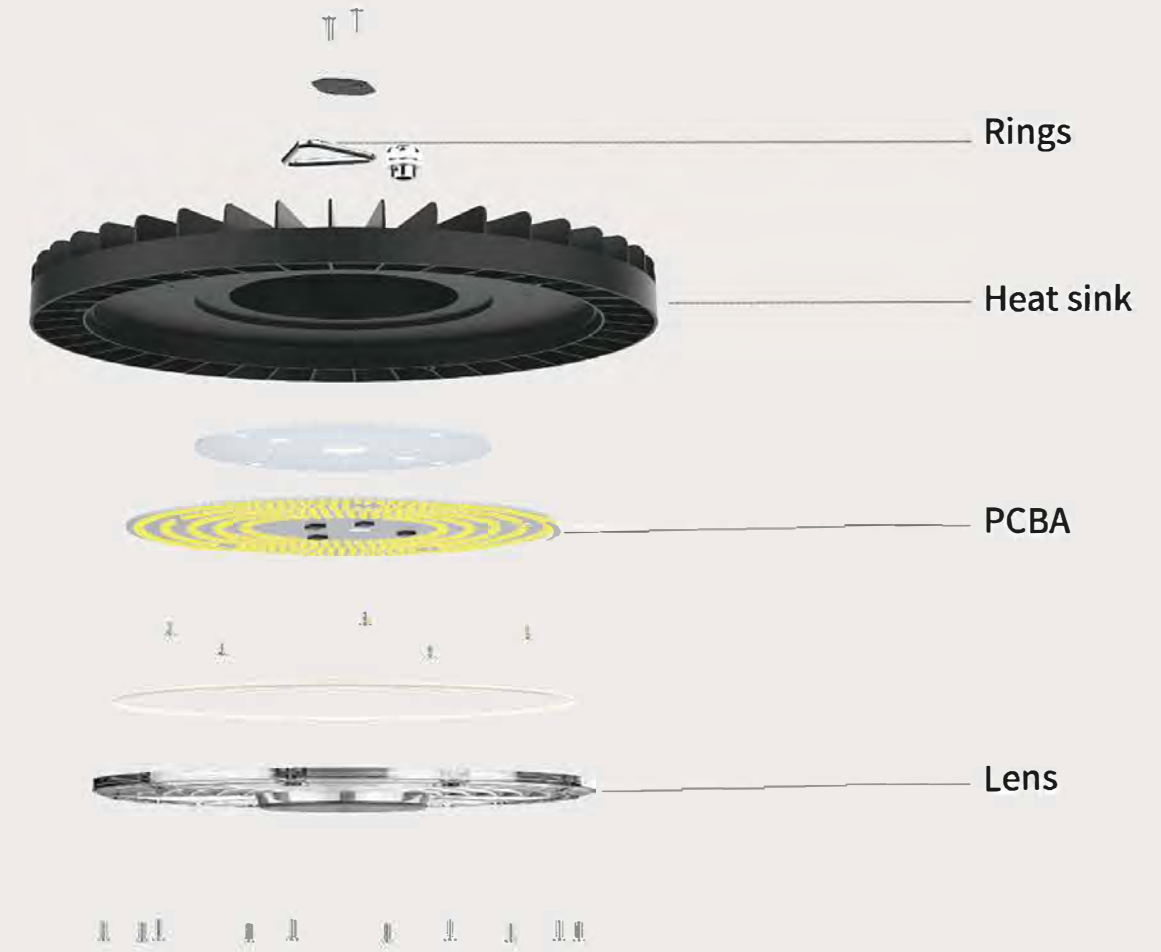

Power (W)	Voltage (V)	Lumen (lm)	Angle	Size (D,B) mm
100	220-240	12000	60°90°120°	φ240*32
150	220-240	18000	60°90°120°	φ285*35
200	220-240	24000	60°90°120°	φ315*41




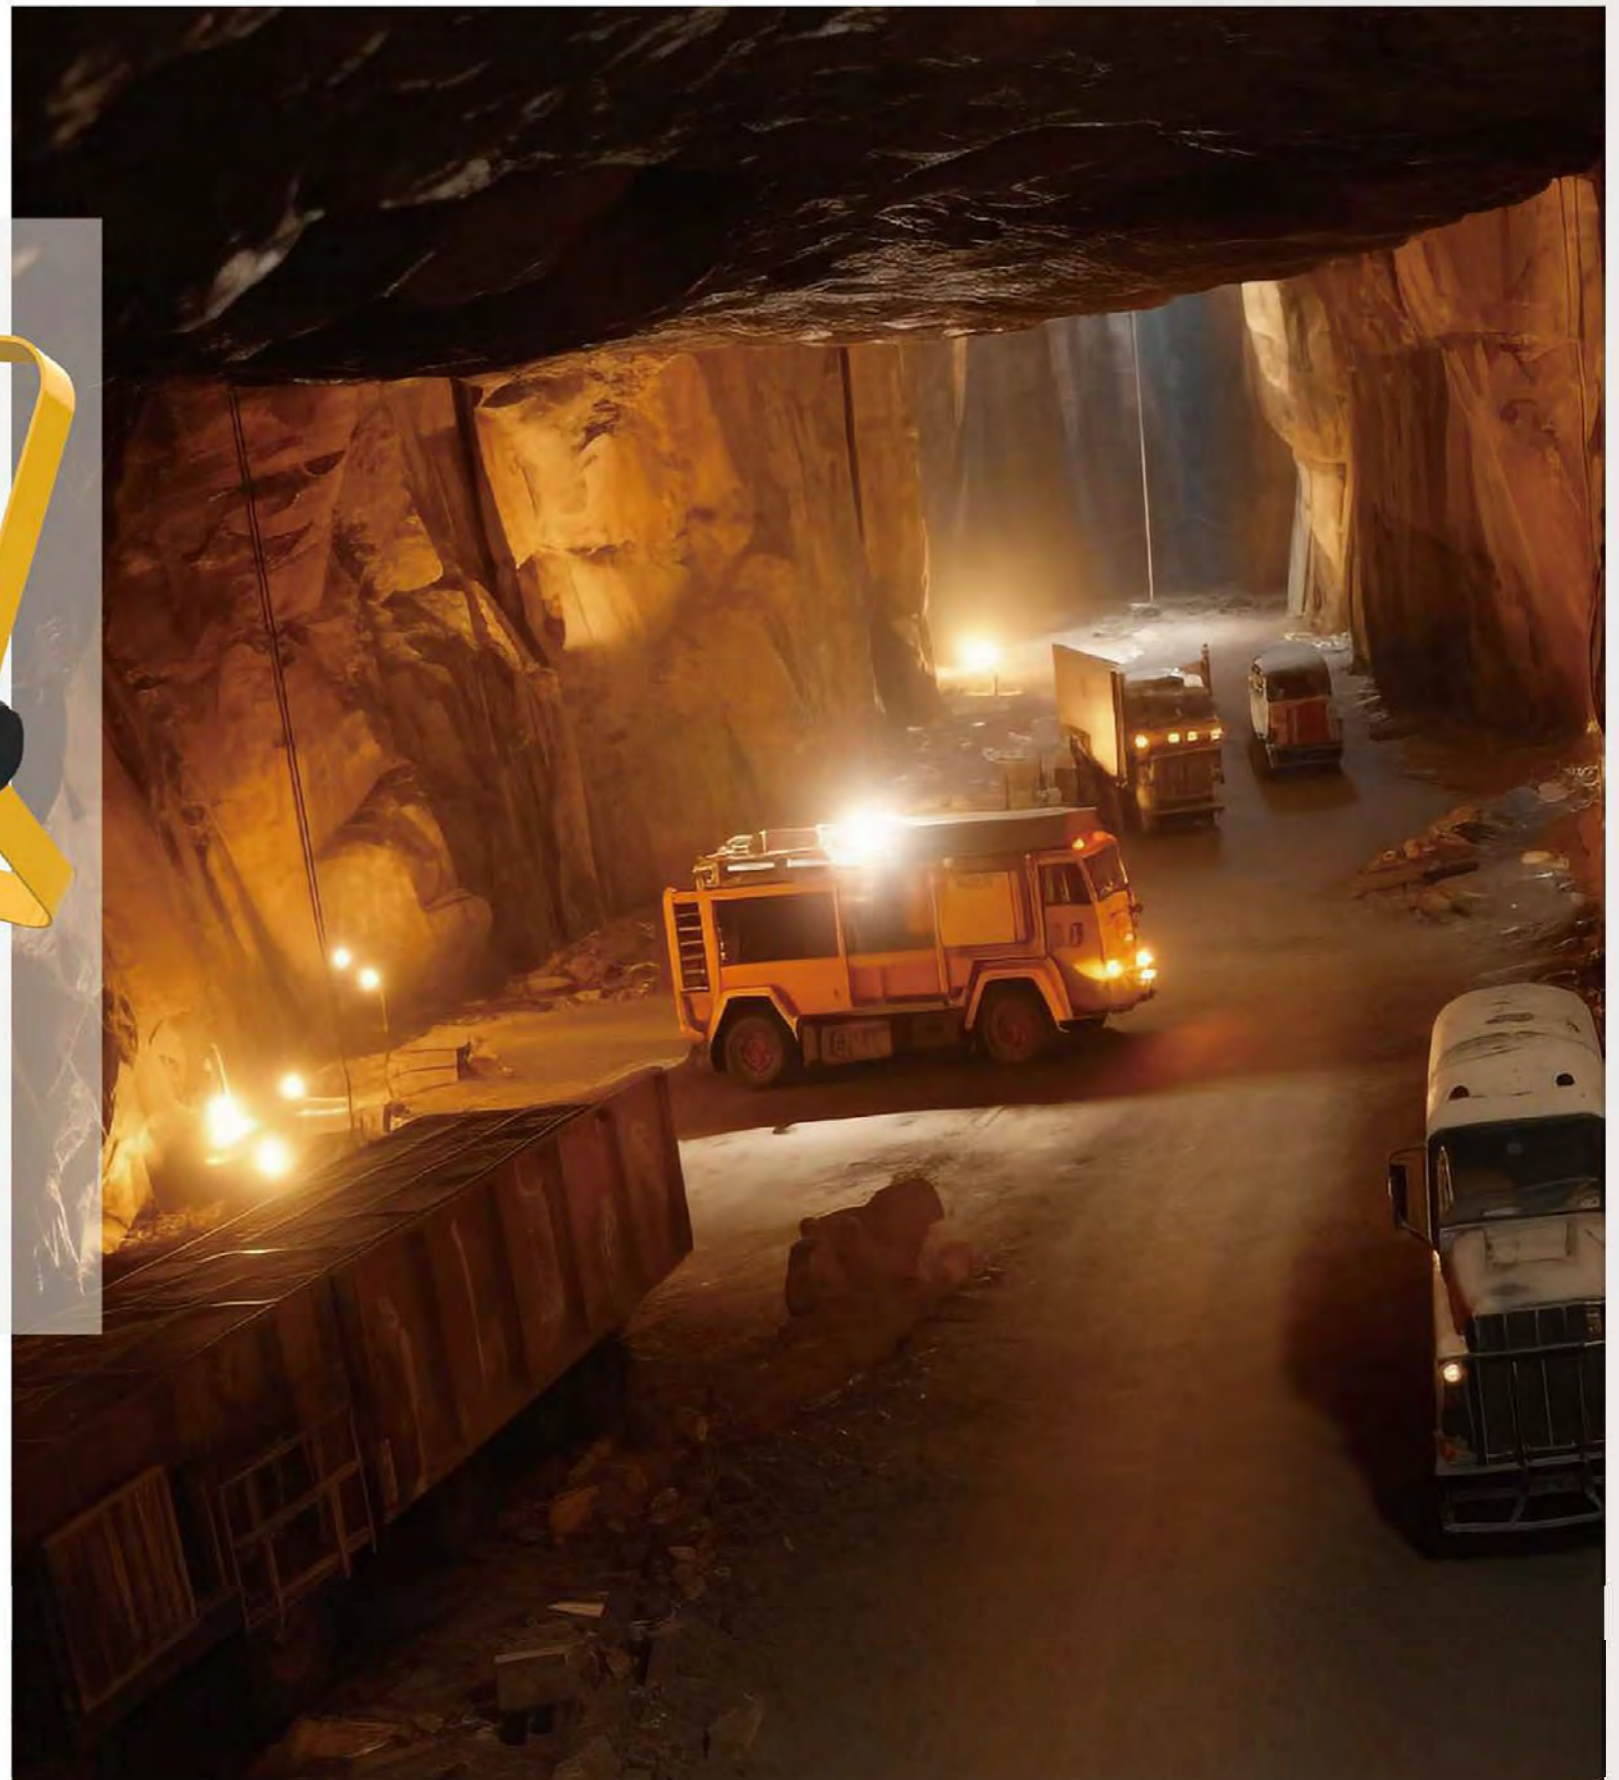

Power (W)	Voltage (V)	Lumen (lm)	Angle
10	220-240/100-240	900	120°
20	220-240/100-240	1800	120°
30	220-240/100-240	2700	120°


Power (W)	Voltage (V)	Lumen (lm)	Angle
50	220-240/100-240	4500	120°
70	220-240/100-240	6300	120°
100	220-240/100-240	9000	120°

工作灯

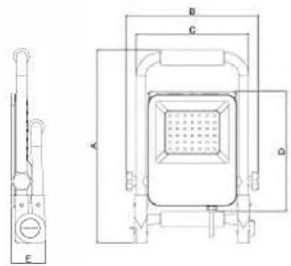

Power (W)	Voltage (V)	Lumen (lm)	Angle
10	220-240	1200	120°
20	220-240	2400	120°
30	220-240	3600	120°
50	220-240	6000	120°



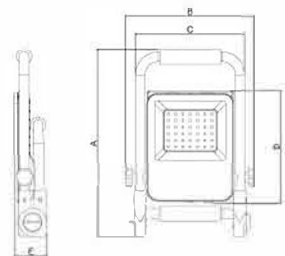

Power (W)	Voltage (V)	Lumen (lm)	Angle	Battery	Solar panel	Working hours
50	DC5V	900	120°	3.7V/5.2AH	6V/8W	>2H