

Lighting Catalog









MAGNETIC
TRACK LIGHT

Random combination structure is more reasonable

TRACKS

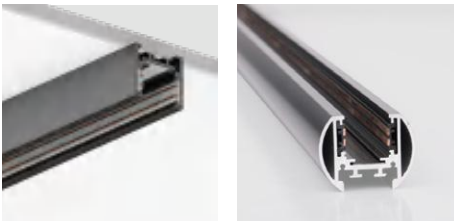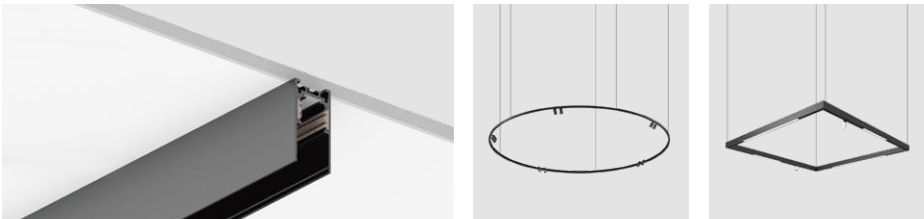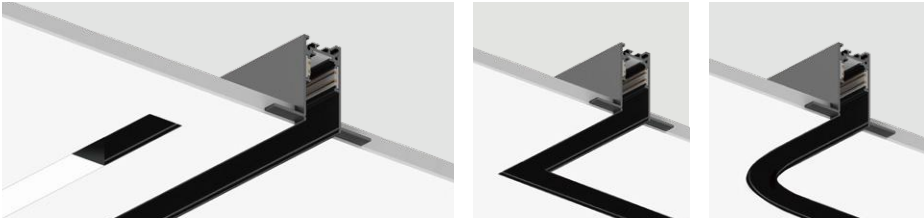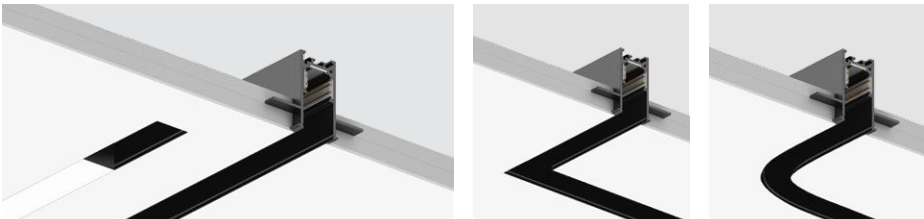

CONNECTION AND CONTROL

CORNER FITTING



CONNECTOR



POWER SUPPLY



LIGHTING FIXTURES

LED TRACK LIGHT



LED FOLDING LIGHT



LED LINEAR GRILLE LIGHT



LED FOLDING LIGHT




LIGHTING FIXTURES

LED LINEAR CORNER LIGHT



LED PENDANT LIGHT



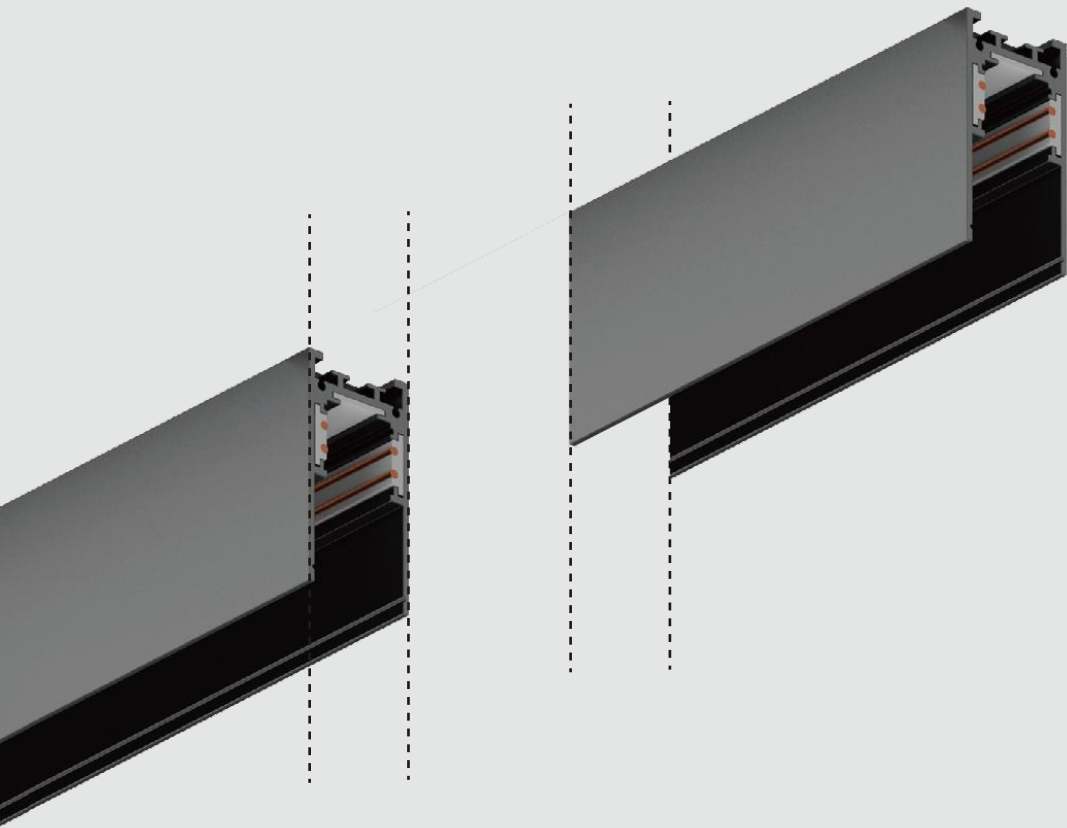


FREE SPLICING

It can be spliced into various shapes at will to adapt to different scenarios.



Easy installation

The lamp is installed by magnetic suction, with its own switch buckle.

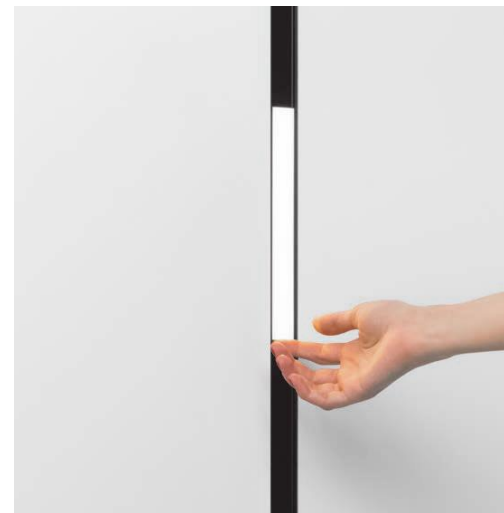

48V safe voltage

The track is connected to the electric power network through the power source, converting the 220 V voltage into 48 V.


RECESSED TRACK



QUICKINFO
GENERAL
RECESSED TRIMLESS
IP 20
ELECTRICAL
NON-DIMABLE ; DALI-DIMABLE
0-10V-DIMABLE ; TUYA -ZIGBEE DIMABLE
PHYSICAL
ALUMINIUM
SPRAY POWDER

DESCRIPTION

Extruded aluminium profile with 27.6mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness ;suitable for wall or ceiling mounting; designed for continuous lightingsystems, 90°angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magneticholders+locking; degree of protection IP 20: PCI/PC II(power supply) or PC III (light insets); either non dimmable, DALI or BLE Mesh control.

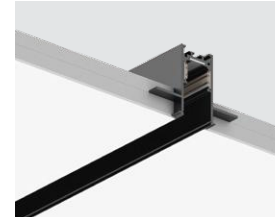

RECESSED TRACK

order installation track light insets+ mounting accessories separately

OPTIONS

1	NON-DIM
2	0/1-10V
3	DALI
4	BLE
5	ZIGBEE



The system supports intelligent adjustment of light brightness and color temperature



	1000 1500 2000	recessed
	(120×120)×27.6× 52.5mm	horizontal corner connector
	(120×120)×27.6× 52.5mm	interior corner connector
	(120×120)×27.6× 52.5mm	exterior corner connector
	120×18×18mm	flexible connector ,wire 150mm
	235*22*25mm	Internal installation,output 48V
	235*22*25mm	External installation,output 48V
	144×18×18mm	power connector ,wire 300mm
	8*80*1.5mm	fixed sheet
	52×26.5mm	fixed sheet
	80*80*8mm	End caps (pair)
	width22mm	Front cover of rail


RECESSED TRACK



QUICKINFO
GENERAL
RECESSED TRIMLESS
IP 20
ELECTRICAL
NON-DIMABLE ; DALI-DIMABLE
0-10V-DIMABLE ; TUYA -ZIGBEE DIMABLE
PHYSICAL
ALUMINIUM
SPRAY POWDER

DESCRIPTION

Extruded aluminium profile with 27.6mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness ;suitable for wall or ceiling mounting; designed for continuous lightingsystems, 90°angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magneticholders+locking; degree of protection IP 20: PCI/PC II(power supply) or PC III (light insets); either non dimmable, DALI or BLE Mesh control.

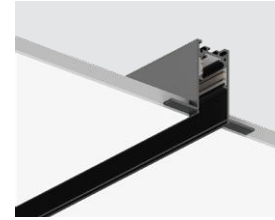

RECESSED TRACK

order installation track light insets+ mounting accessories separately

OPTIONS

1	NON-DIM
2	0/1-10V
3	DALI
4	BLE
5	ZIGBEE




The system supports intelligent adjustment of light brightness and color temperature



	1000 1500 2000	recessed
	(120×120)×27.6× 52.5mm	horizontal corner connector
	(120×120)×27.6× 52.5mm	interior corner connector
	(120×120)×27.6× 52.5mm	exterior corner connector
	120×18×18mm	flexible connector ,wire 150mm
	235*22*25mm	Internal installation,output 48V
	235*22*25mm	External installation,output 48V
	144×18×18mm	power connector ,wire 300mm
	8*80*1.5mm	fixed sheet
	52×26.5mm	fixed sheet
	80*80*8mm	End caps (pair)
	width22mm	Front cover of rail


SURFACE/PENDANT TRACK

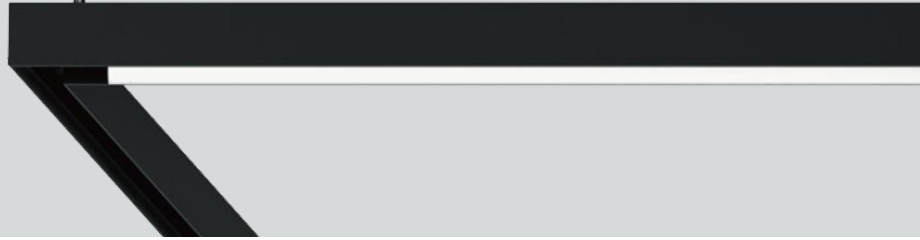

QUICKINFO
GENERAL
SURFACE/PENDANT
IP 20
ELECTRICAL
NON-DIMABLE ; DALI-DIMABLE
0-10V-DIMABLE ; TUYA -ZIGBEE DIMABLE
PHYSICAL
ALUMINIUM
SPRAY POWDER

DESCRIPTION

Extruded aluminium profile with 27.6mm width groove; for wall-/ceiling surface mounting or suspended mounting (1500 mm cable suspension); height adjustment without tools:incl. black feed; designed for continuous lighting systems, 90° angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; surface spray powder black or white/black; can be installed flexibly and without tools by means of magnetic holders+locking; degree of protection IP 20: PC I /PC II(power supply)or PC II (light insets); either non dimmable, DALI or BLE Mesh.

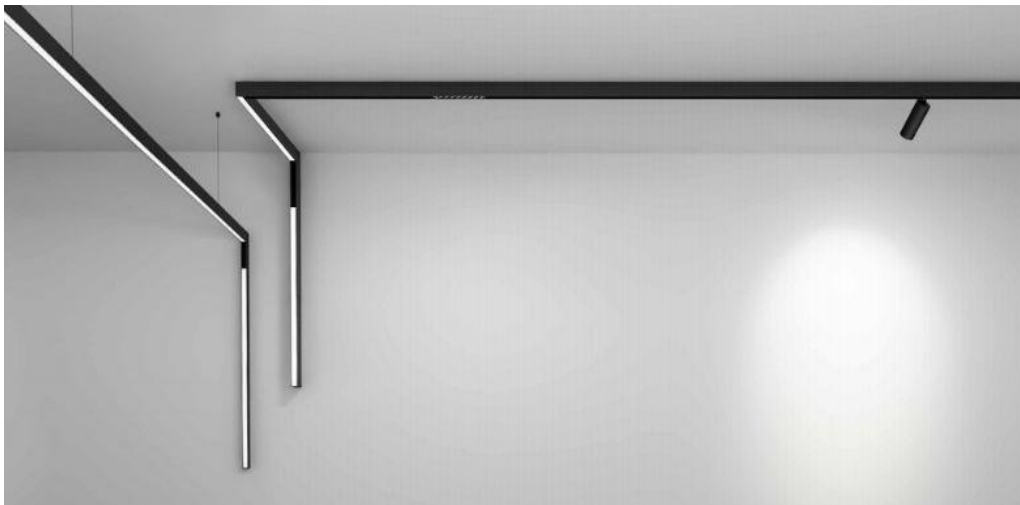

SURFACE/PENDANT

order installation track light insets+ mounting accessories separately

OPTIONS

1	NON-DIM
2	0/1-10V
3	DALI
4	BLE
5	ZIGBEE



The system supports intelligent adjustment of light brightness and color temperature



	1000 1500 2000	recessed
	(120×120)×27.6× 52.5mm	horizontal corner connector
	(120×120)×27.6× 52.5mm	interior corner connector
	(120×120)×27.6× 52.5mm	exterior corner connector
	120×18×18mm	flexible connector ,wire 150mm
	235*22*25mm	Internal installation,output 48v
	235*22*25mm	External installation,output 48v
	144×18×18mm	power connector ,wire 300mm
	8*80*1.5mm	fixed sheet
	52×26.5mm	fixed sheet
	80*80*8mm	End caps (pair)
	width22mm	Front cover of rail



Two power converters
are available

Track built-in switching power supply

Model	Size	Power	Vout	Vin	Install Type	Color
	235*22*25mm	100W	48V	220-240VAC	Internal installation	● ○

Model	Size	Power	Vout	Vin	Install Type	Color
	235*22*25mm	200W	48V	220-240VAC	Internal installation	● ○

External switching power supply

Model	Size	Adjustable Angel	Install Type	Color
	78×18×16mm	0 -360 degree	flexible connector wire 150mm	● ○


Model	Power	Vout	Vin	Install Type
	35/50/75/100/150/200/350W	48V	input 220-240VAC	External installation








Easy Moving

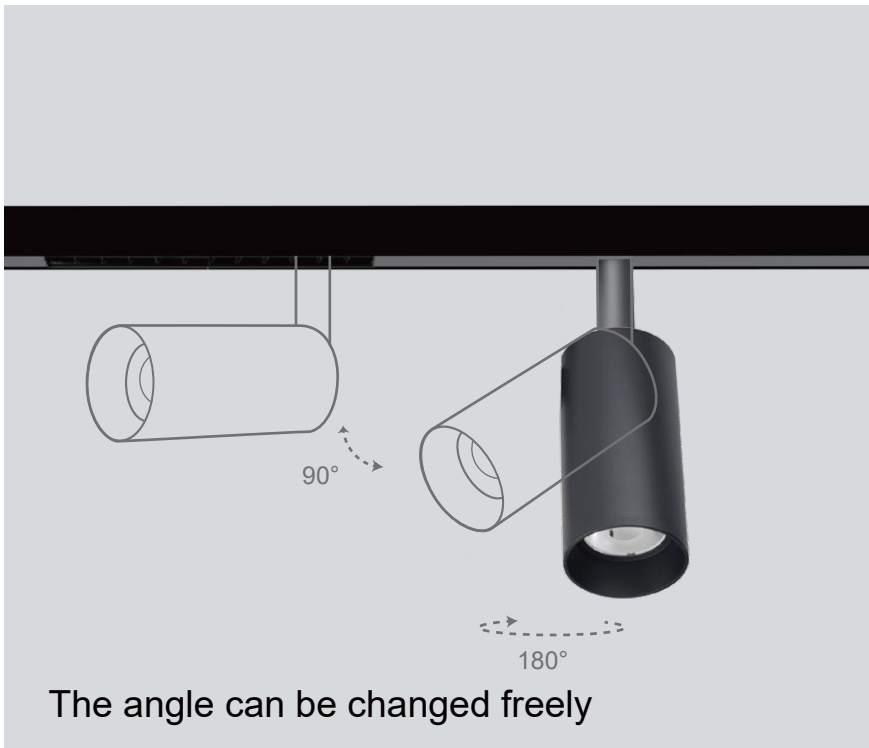


The angle can be changed freely

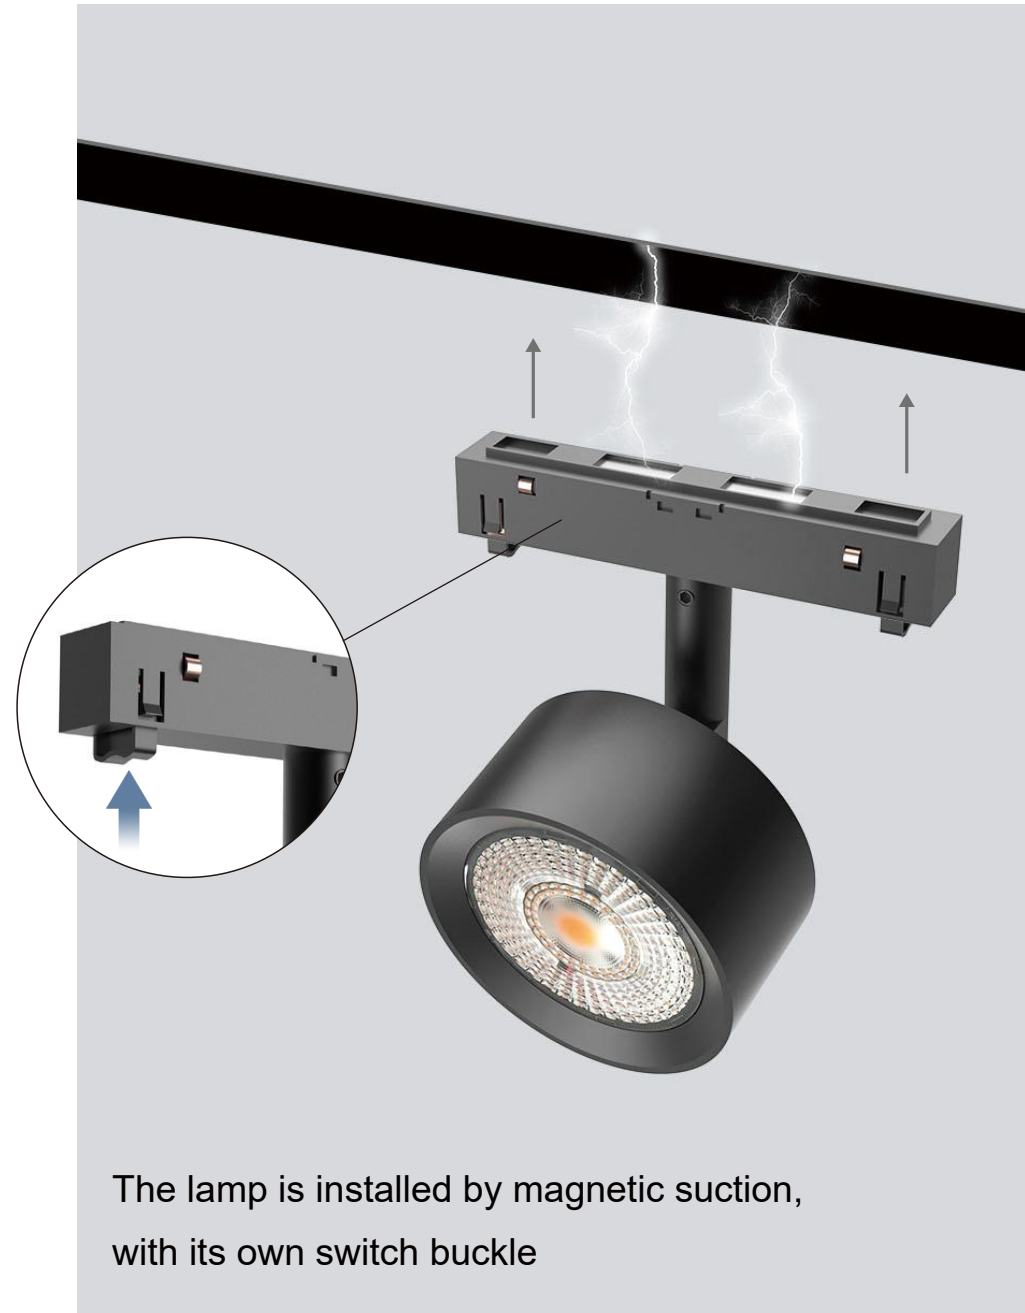

The lamp is installed by magnetic suction,
with its own switch buckle

Smart Lighting

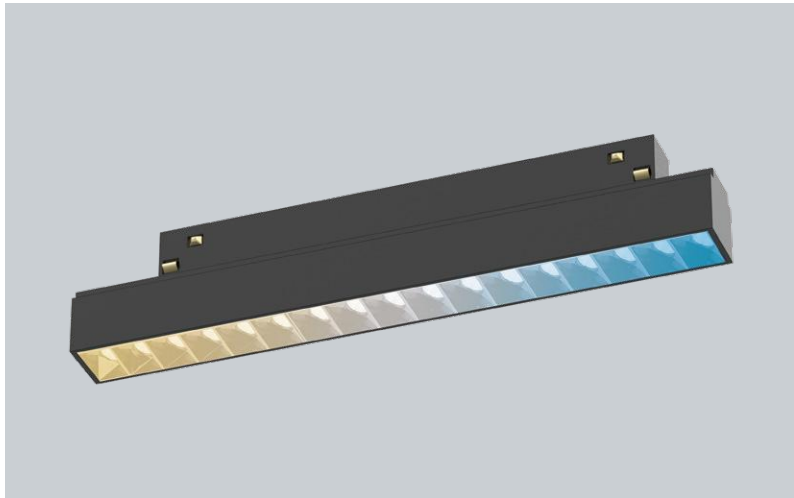


The system supports dimming and CCT tunable of 0-10v, DALI, CASAMBI, TUYA and other protocols;






LED TRACK LIGHT

COLOUR | BK ■ WH □ GD ■ BK+GD ■ WH+GD ■




Size	φ35*71.5mm	Power	5W
Light Source	CREE 1304	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

COLOUR | BK ■ WH □ GD ■ BK+GD ■ WH+GD ■



Size	φ48*90mm	Power	7W
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

COLOUR | BK ■ WH □ GD ■ BK+GD ■ WH+GD ■




Size	φ57*110mm	Power	20W
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		






COLOUR | BK ■ WH □ GD ■ BK+GD ■ WH+GD □




Size	φ75*38mm	Power	7-10W
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/36°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

COLOUR | BK ■ WH □ GD ■ BK+GD ■ WH+GD □




Size	222*50*105mm	Power	2*5W
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/36°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



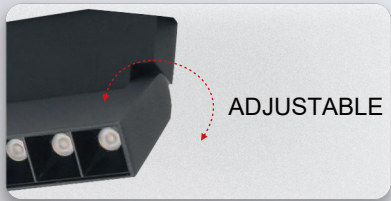


LED FOLDING LIGHT

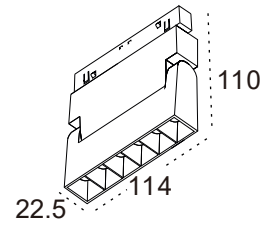

COLOUR | BK ■ WH □ GD ■

Size	114*22.5*H110mm	Power	6W
Light Source	OSRAM 2835	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

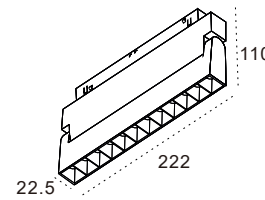

COLOUR | BK ■ WH □ GD ■

Size	222*22.5*H110mm	Power	12W
Light Source	OSRAM 2835	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		






COLOUR | BK ■ WH □ GD ■

Size	114*22.5*H110mm	Power	6W
Light Source	OSRAM 2835	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



COLOUR | BK ■ WH □ GD ■

Size	222*22.5*H110mm	Power	12W
Light Source	OSRAM 2835	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

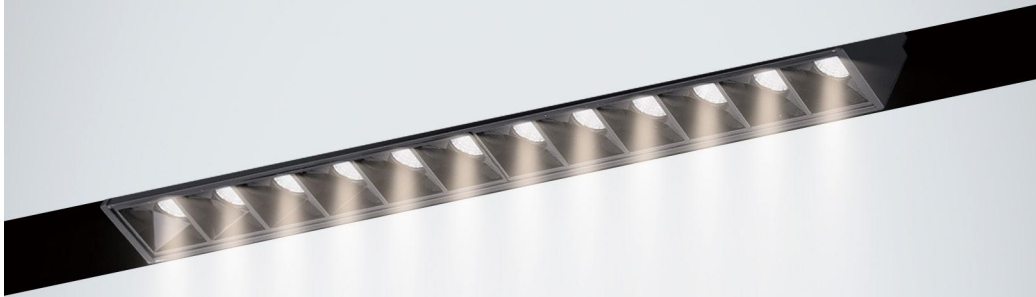

LED LINEAR GRILLE LIGHT



COLOUR | BK ■ WH □ GD ■

Size	110mm*23mm*H47mm	Power	6W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



COLOUR | BK ■ WH □ GD ■

Size	220mm*23mm*H47mm	Power	10W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		







COLOUR | BK ■ WH □ GD ■

Size	435mm*23mm*H47mm	Power	20W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



Multiple sizes are optional

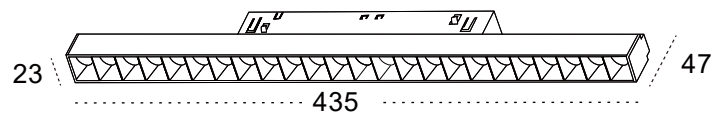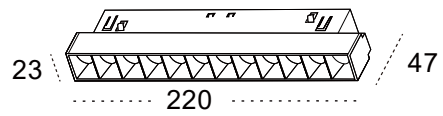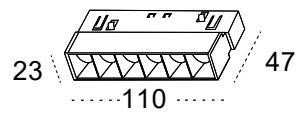

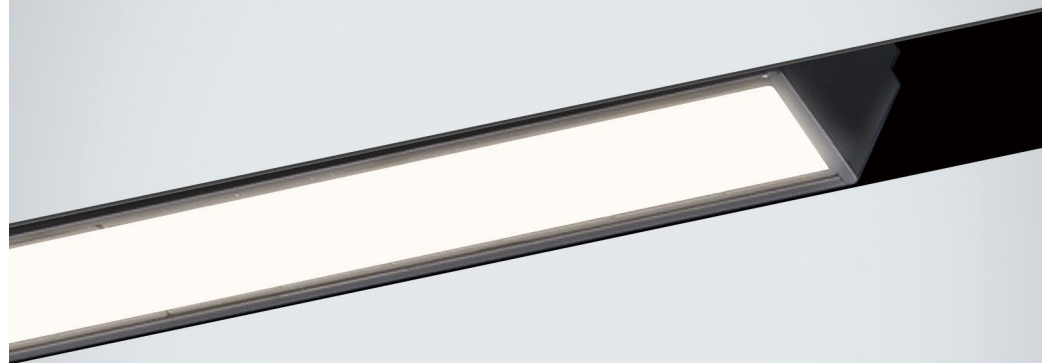

LED LINEAR LIGHT



COLOUR | BK ■ WH □ GD ■

Size	300mm*20mm*H48mm	Power	10W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



COLOUR | BK ■ WH □ GD ■

Size	600mm*23mm*H48mm	Power	20W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



COLOUR | BK ■ WH □ GD ■





Size	900mm*23mm*H48mm	Power	30W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		




COLOUR | BK ■ WH □ GD ■

Size	1200mm*23mm*H48mm	Power	35W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		





Multiple sizes are optional

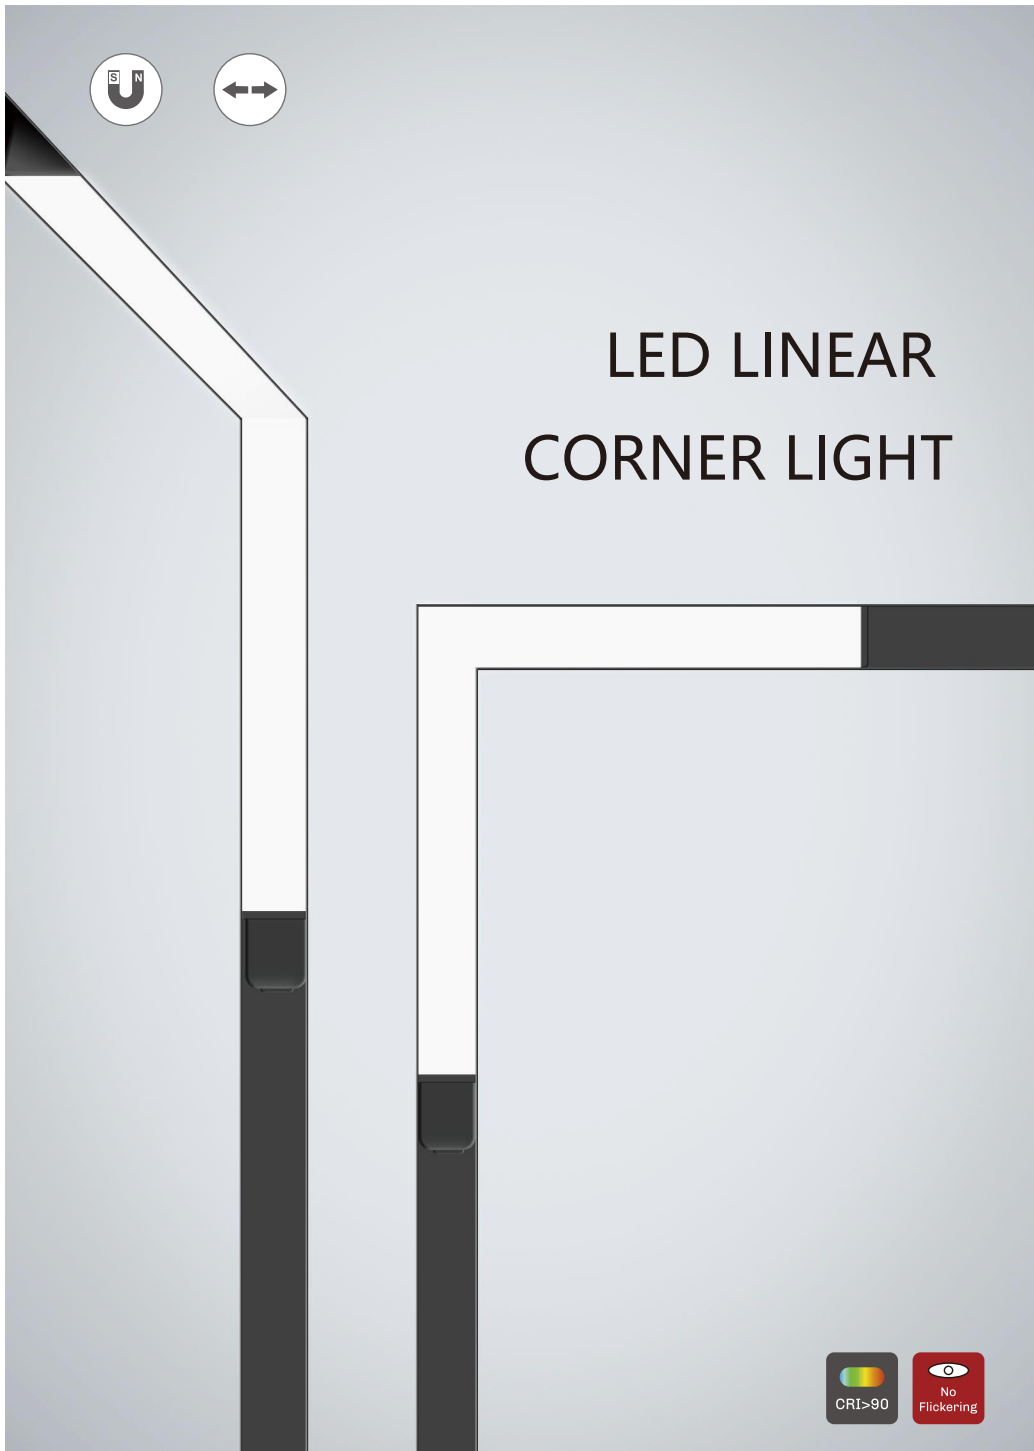

LED LINEAR CORNER LIGHT



COLOUR | BK ■ WH □ GD ■

Size	300*300*H48mm	Power	20W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		





COLOUR | BK ■ WH □ GD ■

Size	300*48*H300mm	Power	20W
Light Source	OSRAM 3030	Ra	Ra90
Beam Angle	120°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		






Multiple sizes are optional

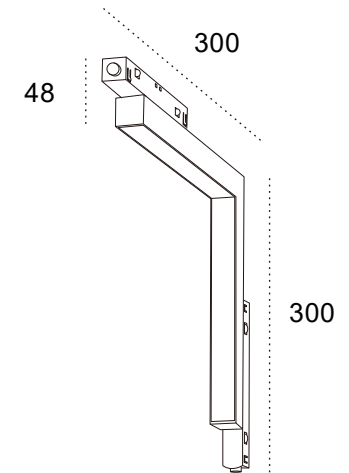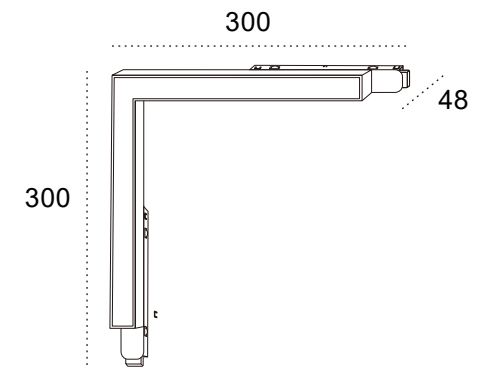




LED PENDANT LIGHT




COLOUR | BK ■ WH □ GD ■

Size	100mm	Power	2*5/10W
Light Source	CREE 1304	Ra	Ra90
Beam Angle	15°/24°/36°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		



COLOUR | BK ■ WH □ GD ■

Size	235*300mm	Power	5-7w
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/36°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		




COLOUR | BK ■ WH □ GD ■

Size	60*295mm	Power	10W
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/38°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		






COLOUR | BK ■ WH □ GD ■



Size	60*130mm	Power	10W
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/36°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

COLOUR | BK ■ WH □ GD ■



Size	26*260mm	Power	3w
Light Source	CREE	Ra	Ra90
Beam Angle	15°/24°/36°	Voltage	48VDC
Dimmer Optional	0-10v/DALI/Tuya	Material	aluminium
CCT	2700K/3000K/3500K/4000K/5700K		

