

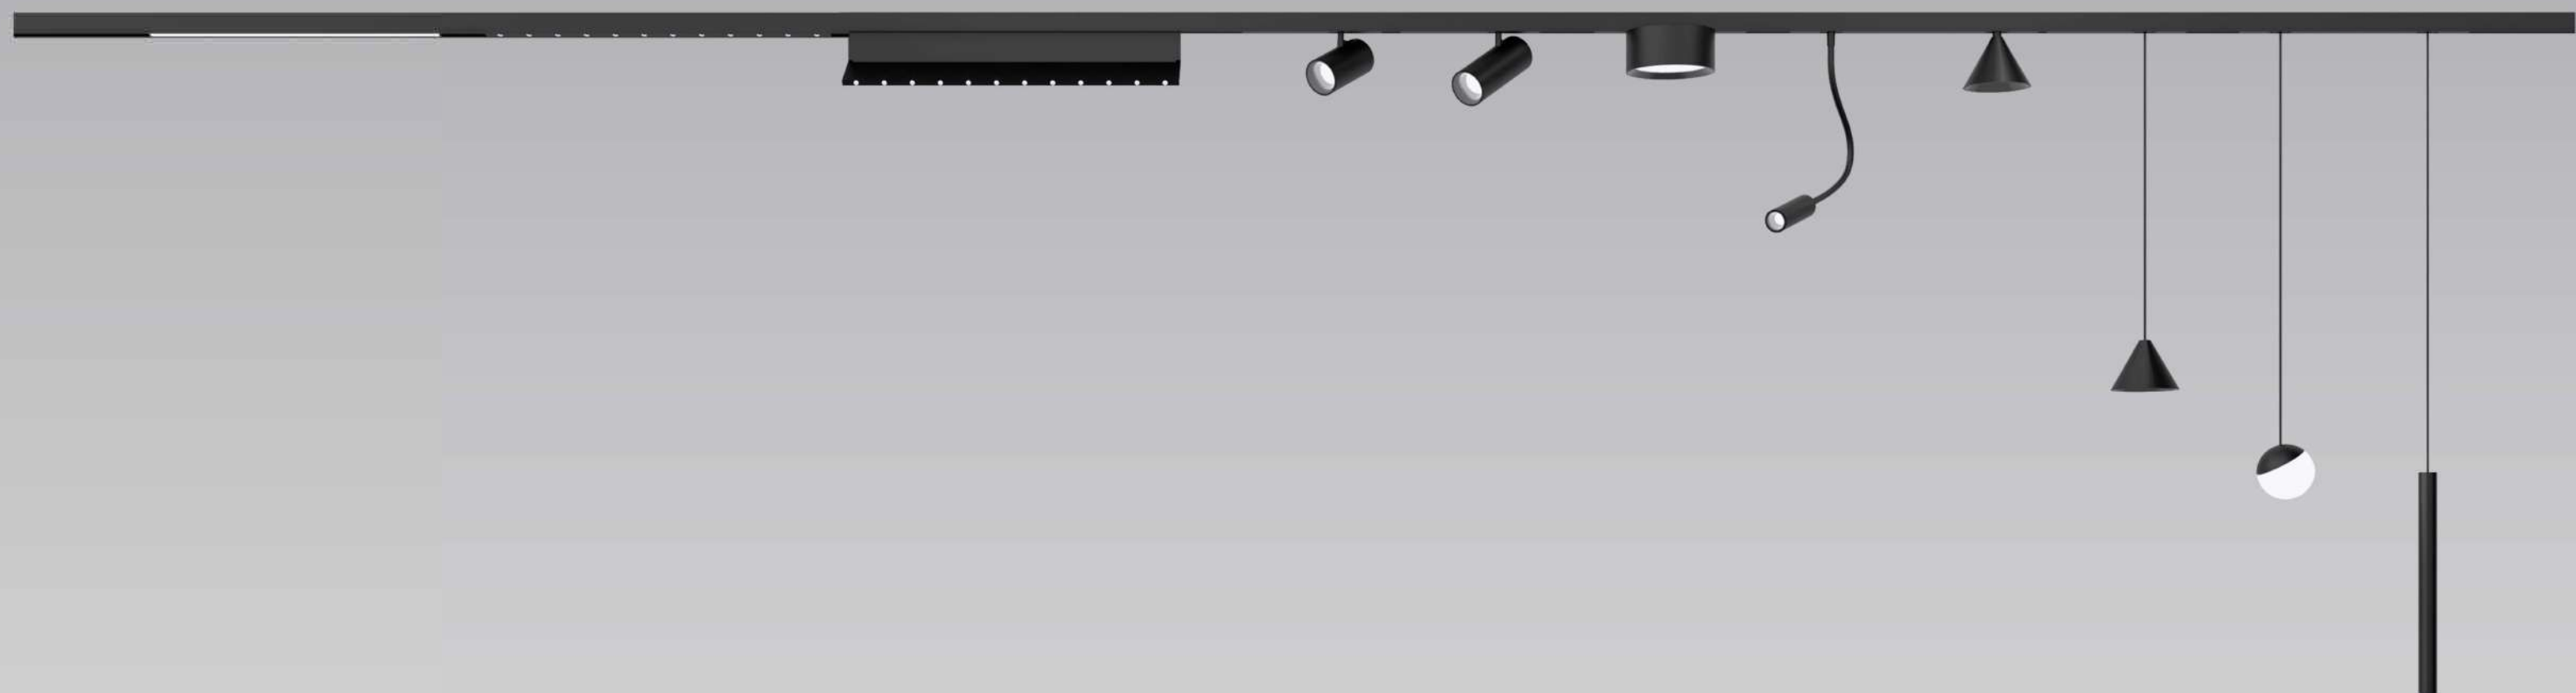




Lighting Catalog







SUPERSLIM TRACK


		
Material	Finish	Size (mm)
Aluminum	● ○	L1000xW11xH17 L2000xW11xH17 L3000xW11xH17

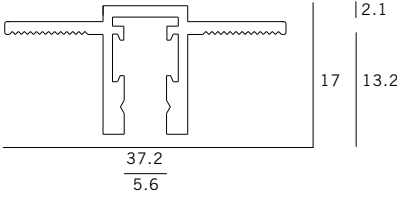		
Material	Finish	Size (mm)
Aluminum	● ○	L1000xW37.2xH17 L2000xW37.2xH17 L3000xW37.2xH17

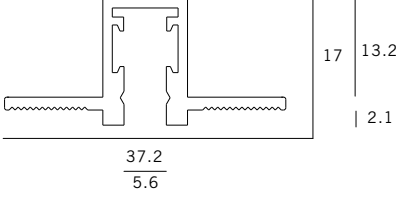
		
Material	Finish	Size (mm)
Aluminum	● ○	L1000xW37.2xH17 L2000xW37.2xH17 L3000xW37.2xH17




SUPERSLIM Multiple module connection

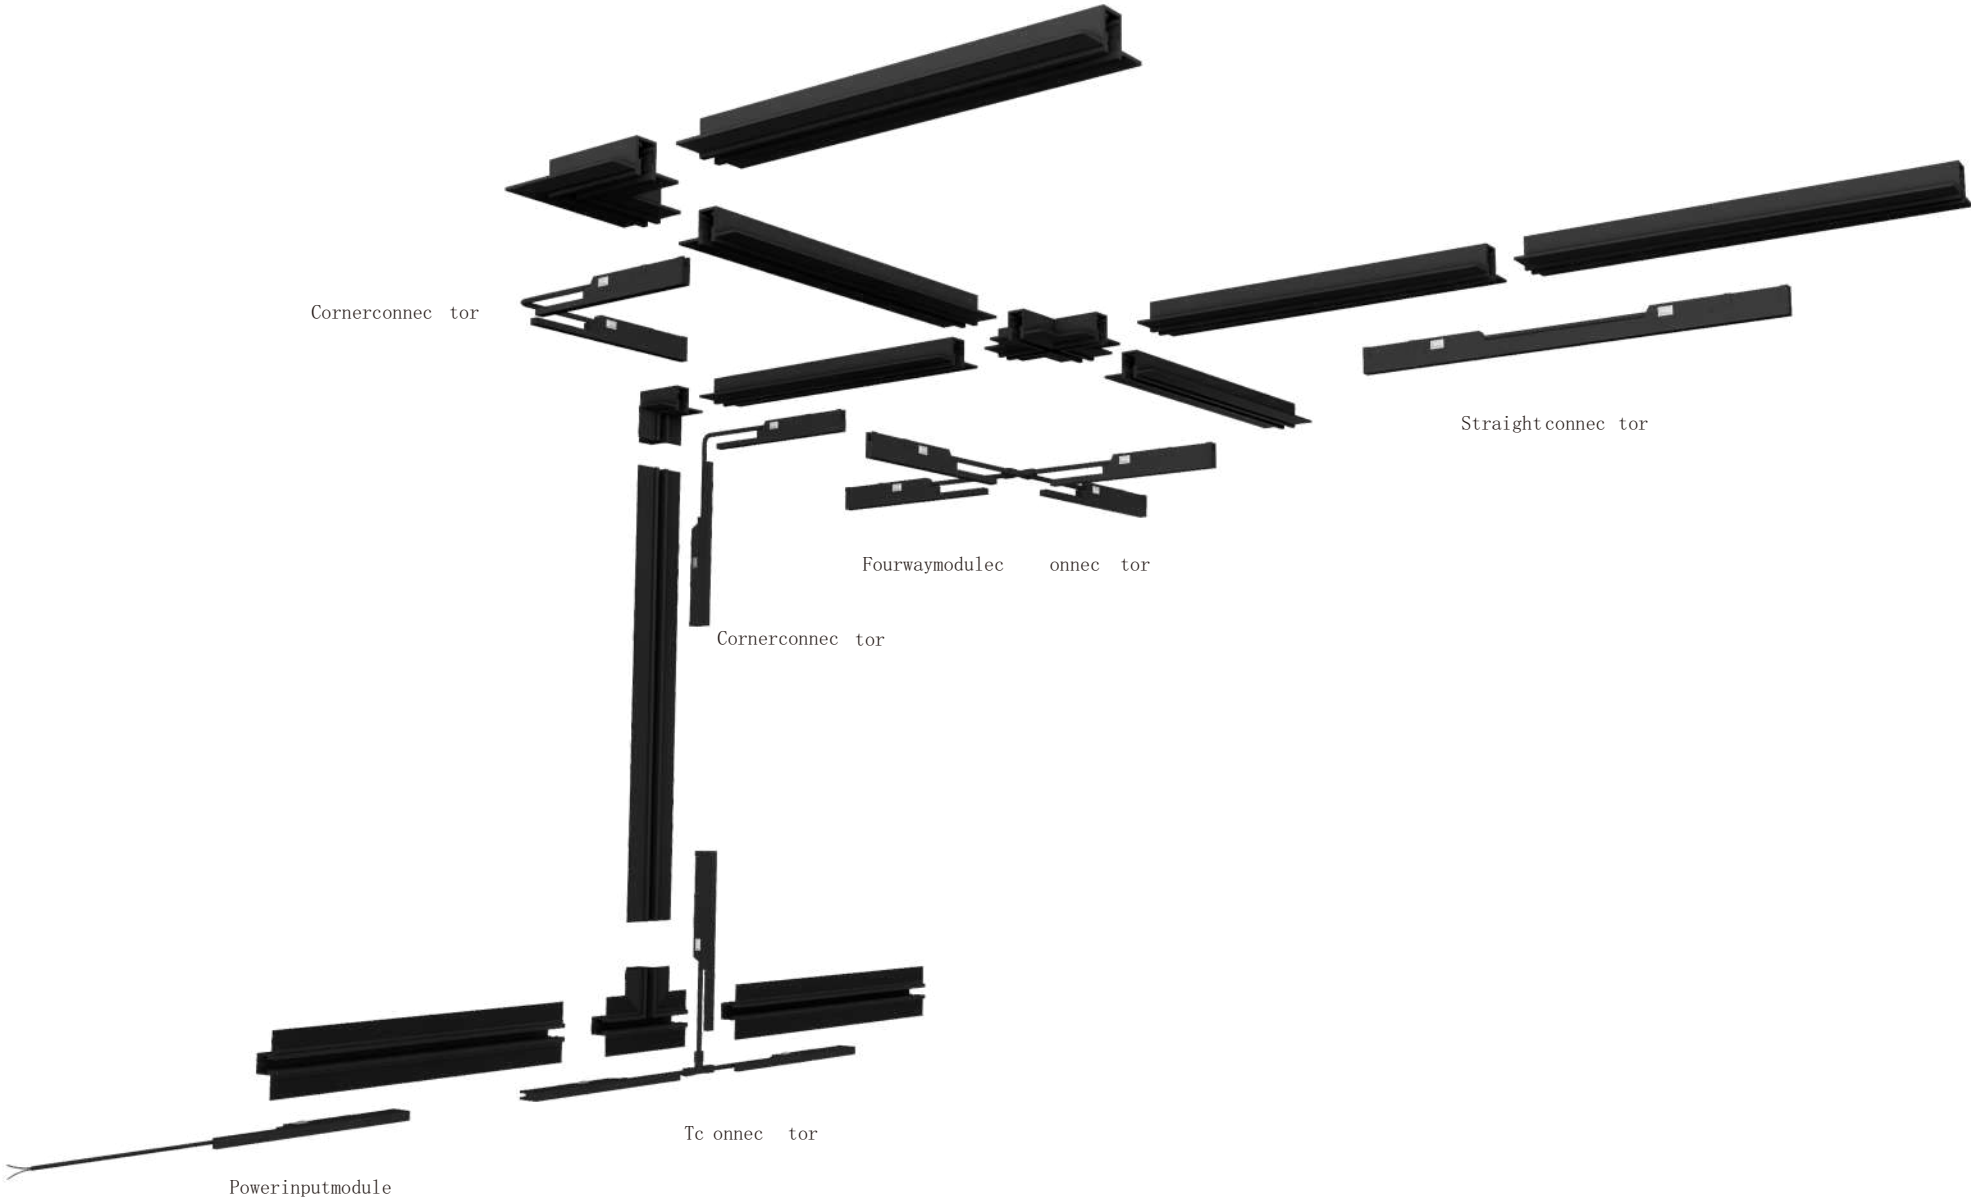


Powerinputmodule
Size: L100xW5xH14mm



Straightconec tor
Size: L200xW5xH14mm




Cornerconec tor
Size: L215xW5xH14mm




Tc onnec tor
Size: L260xW5xH14mm



Fourwaymodulec onnec tor
Size: L260xW5xH14mm

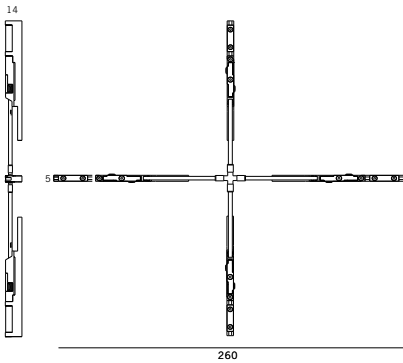


SUPERSLIM

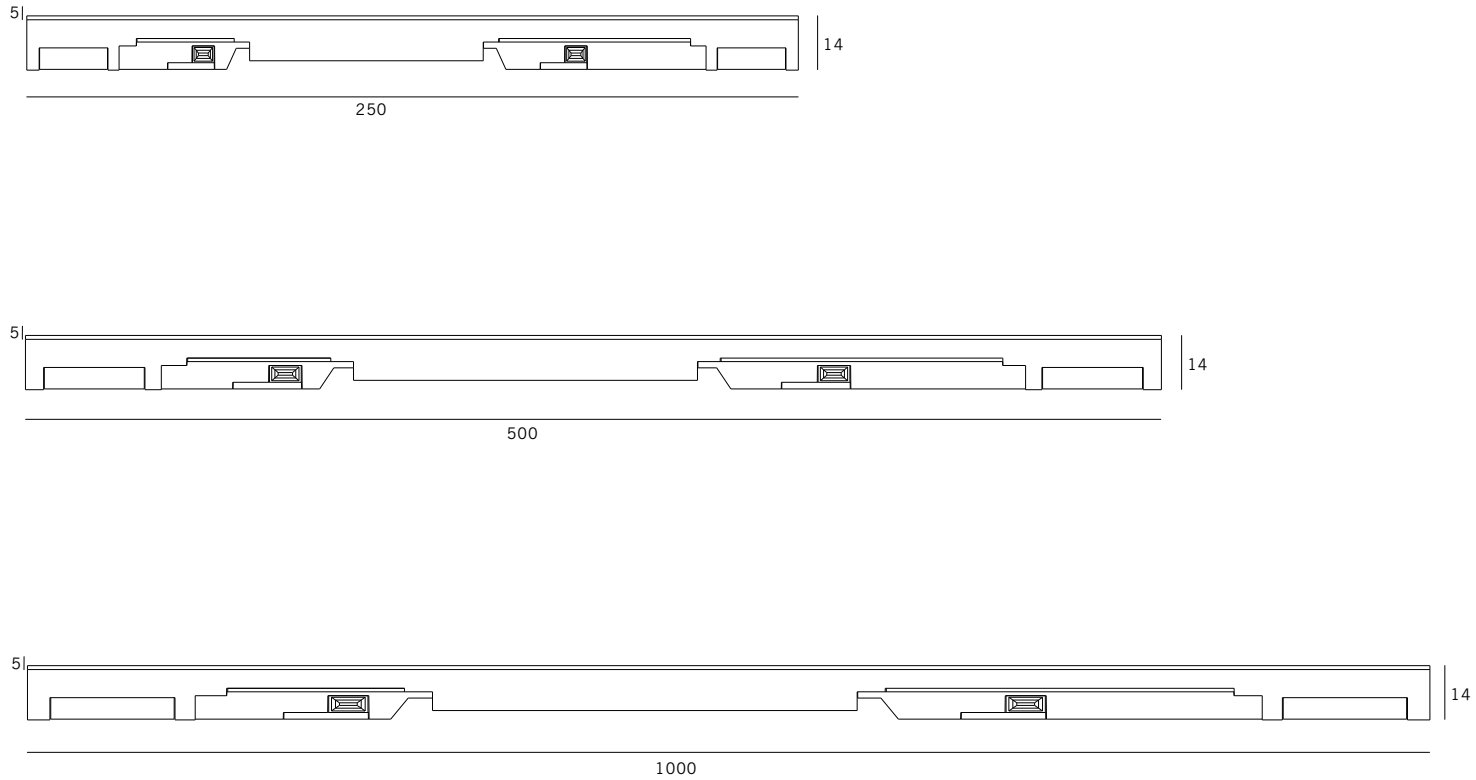


Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
6W	Ra90	48V	250x5x14	BK WH	2700K	O-10V
12W	Ra90	48V	500x5x14		3000K	Silicon control
24W	Ra90	48V	1000x5x14		4000K	DALI

5000K
2700-6500K


Beam angle




Light distribution curve

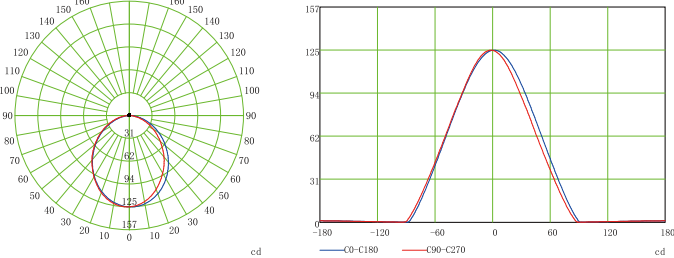

Light distribution curve

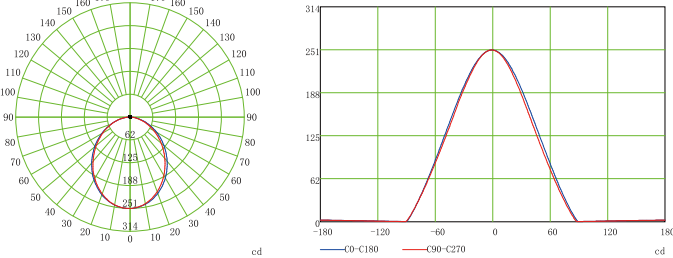

SUPERSLIM

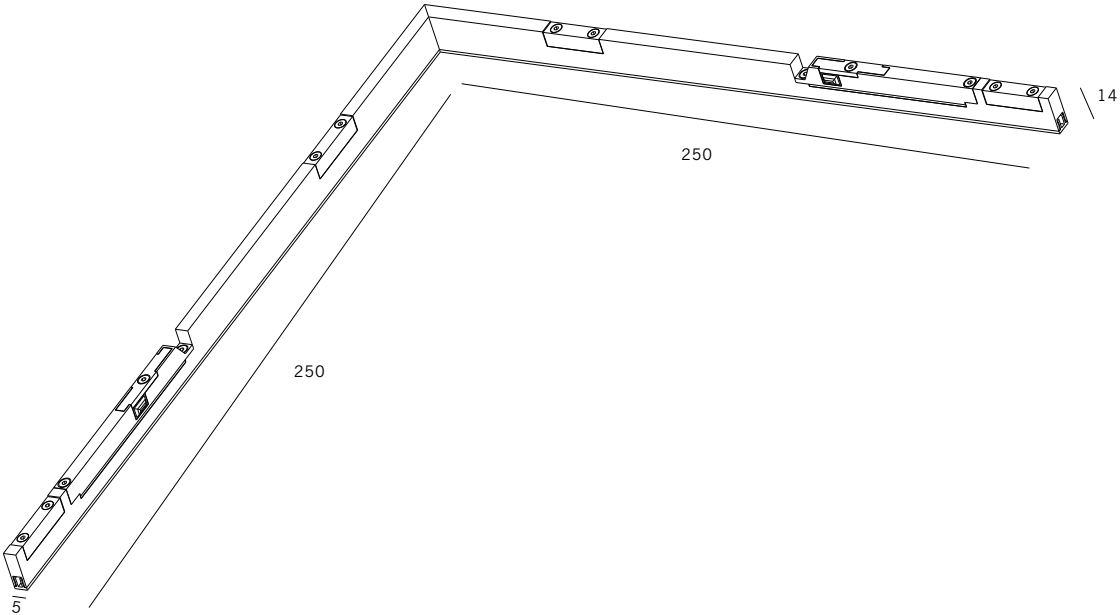

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

12W

Ra90

48V


250x250x5x14

- BK
- WH


2700K
3000K
4000K
5000K
2700-6500K

O-10V
Silicon control
DALI



Beam angle



Light distribution curve

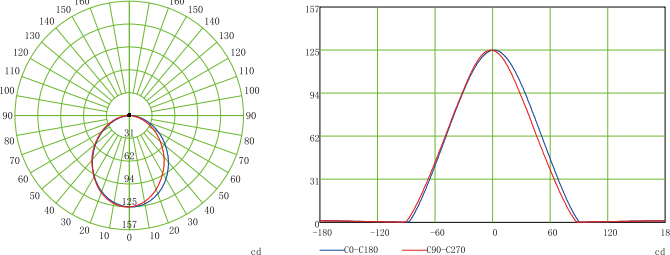

SUPERSLIM

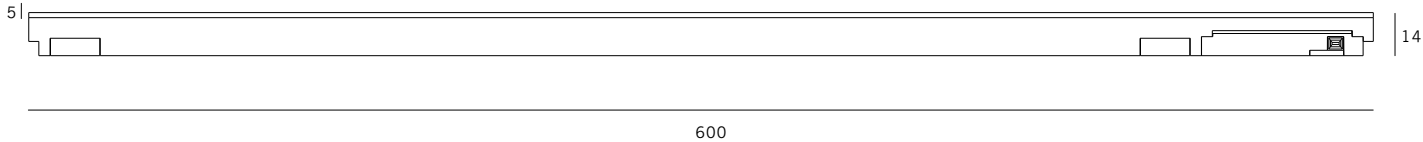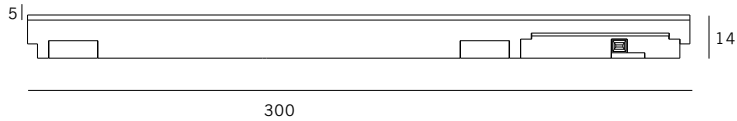

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

6W

Ra90

48V

300x5x14



BK



WH

2700K

3000K

4000K

5000K

2700-6500K

0-10V

Silicon control



DALI

Beam angle


Light distribution curve



80°

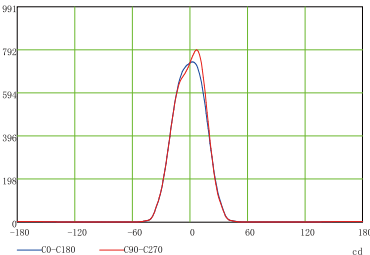

SUPERSLIM

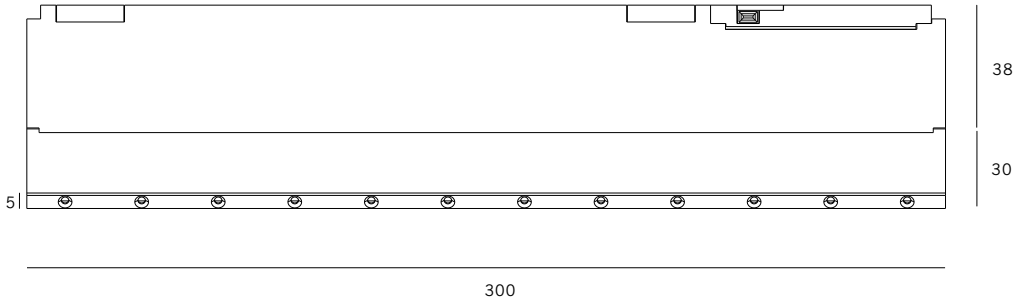

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

6W

Ra90

48V

300x5x68

- BK
- WH

2700K
3000K
4000K
5000K
2700-6500K


O-10V
Silicon control
DALI

Beam angle




80°

Light distribution curve

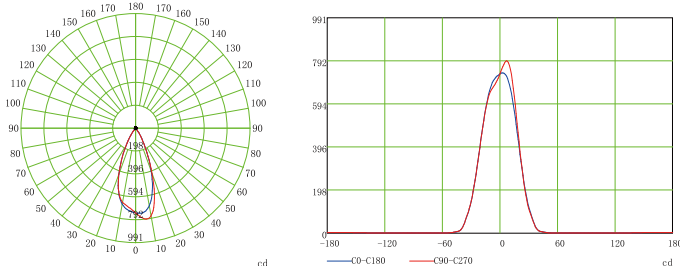

SUPERSLIM



Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

4W

Ra90

48V

Φ 28x54x126



- BK
- WH

2700K
3000K
4000K
5000K
2700-6500K


O-10V
Silicon control
DALI

Beam angle

Light distribution curve

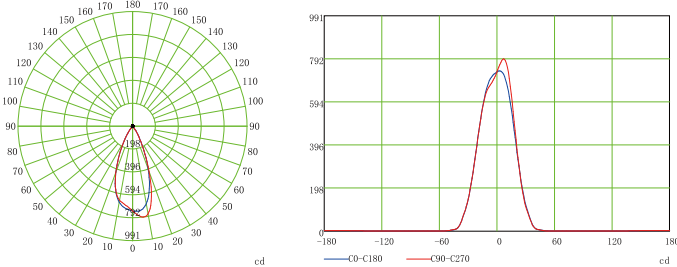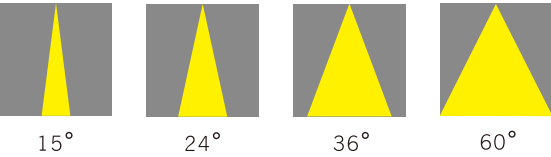

SUPERSLIM

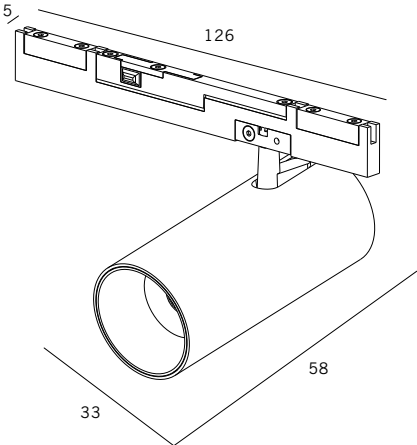

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

7W

Ra90

48V

Φ34x58x126



- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K
- 2700-6500K


- O-10V
- Silicon control
- DALI

Beam angle

Light distribution curve

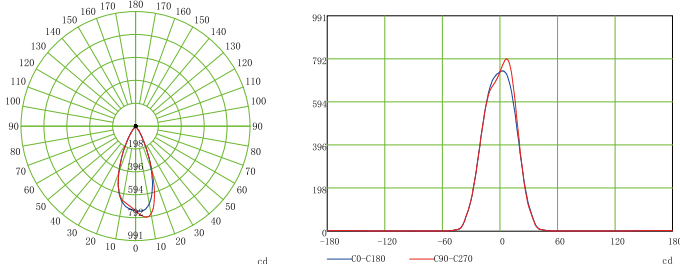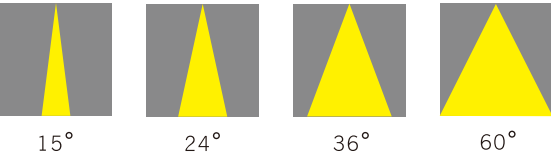

SUPERSLIM

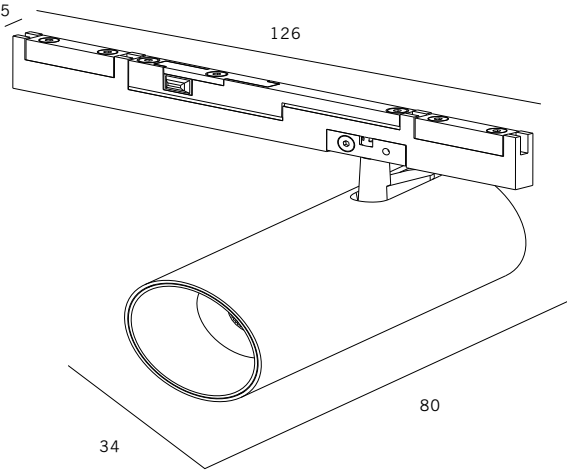

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

10W

Ra90

48V

Φ 34x80x126



- BK
- WH

2700K
3000K
4000K
5000K
2700-6500K


0-10V
Silicon control
DALI

Beam angle

Light distribution curve

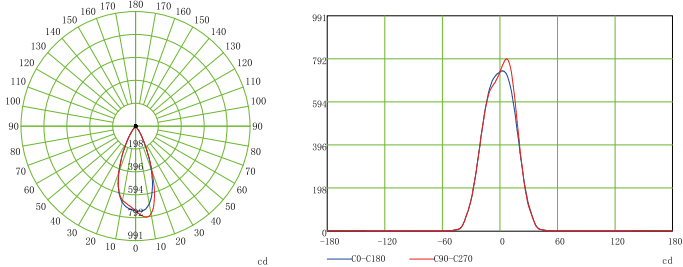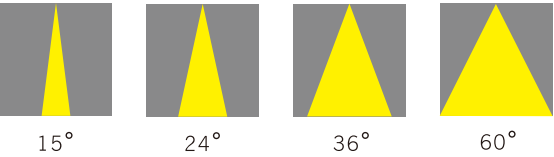

SUPERSLIM

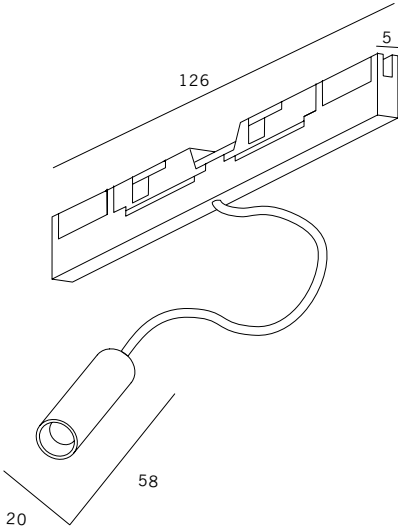

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

2W

Ra90

48V

Φ 20x58x126



- BK
- WH

2700K
3000K
4000K
5000K
2700-6500K


0-10V
Silicon control
DALI

Beam angle

Light distribution curve

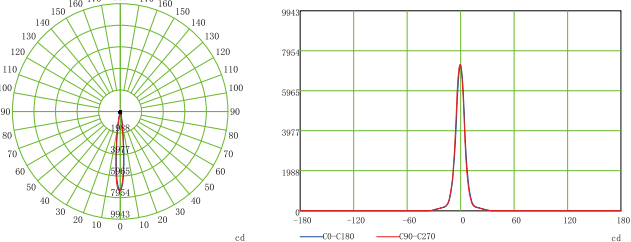

SUPERSLIM

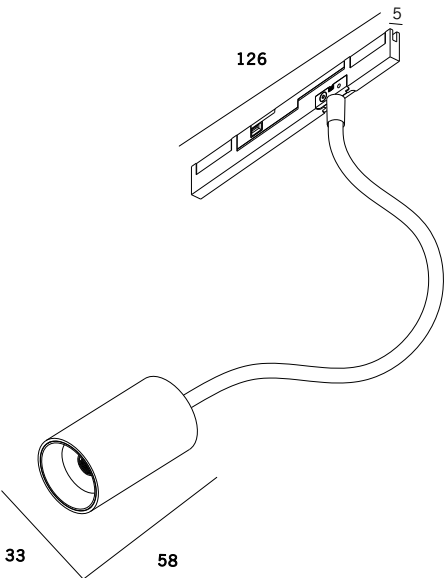

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

4W

Ra90

48V

Φ 34x58x126



- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K
- 2700-6500K


- O-10V
- Silicon control
- DALI

Beam angle

Light distribution curve

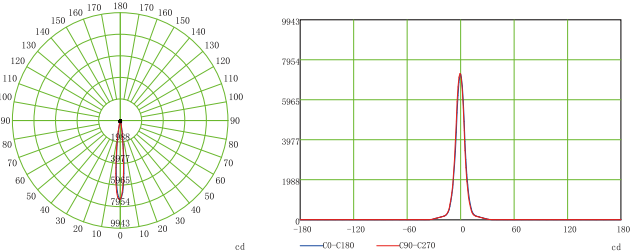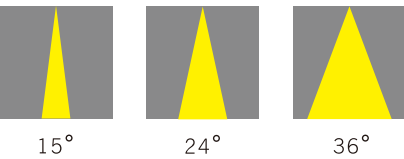



SUPERSLIM

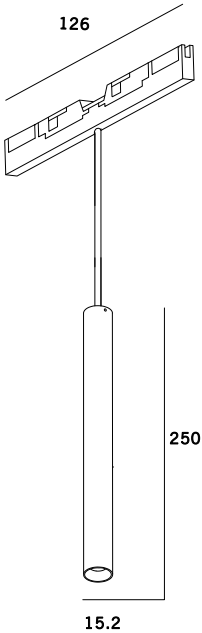

Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
2W	Ra90	48V	Φ 15.2x250x126	BK WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle

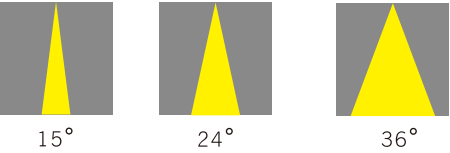


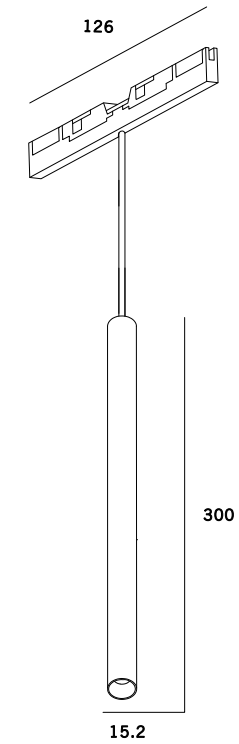

Beam angle




SUPERSLIM

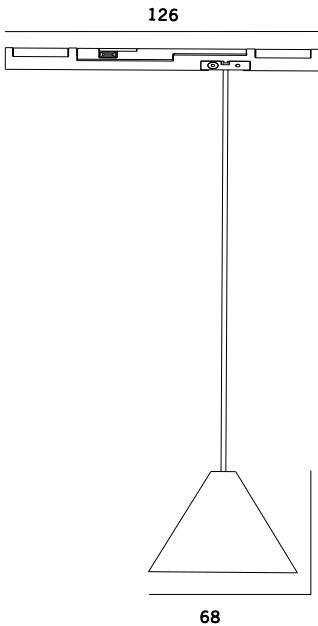


Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
4W	Ra90	48V	Φ 68x45x126	BK WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI

Beam angle




11/11/2016

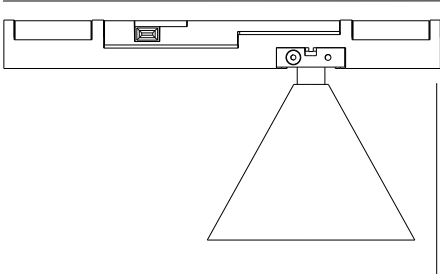

Beam angle


 36°

SUPERSLIM

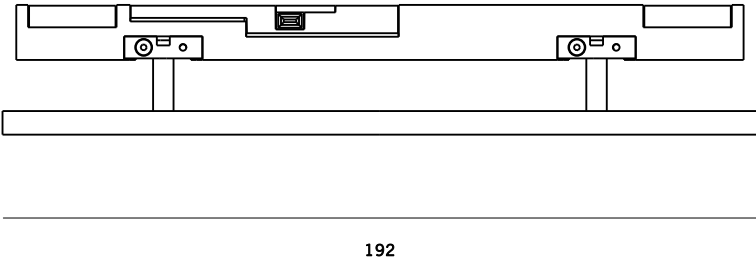

	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
	10W	Ra90	48V	Φ 192	BK WH	2700K 3000K 4000K 5000K 2700-6500K	O-10V Silicon control DALI
Beam angle							

SUPERSLIM

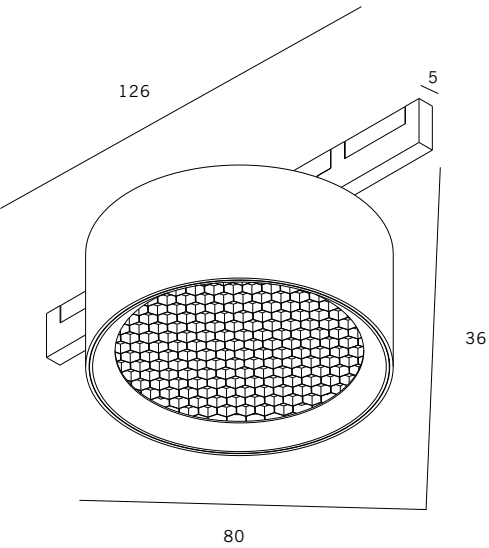

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

10W

Ra90

48V

Φ 80x36*126



- ☒ BK
- ☐ WH

- 2700K
- 3000K
- 4000K
- 5000K
- 2700-6500K



- O-10V
- Silicon control
- DALI

Beam angle

Light distribution curve

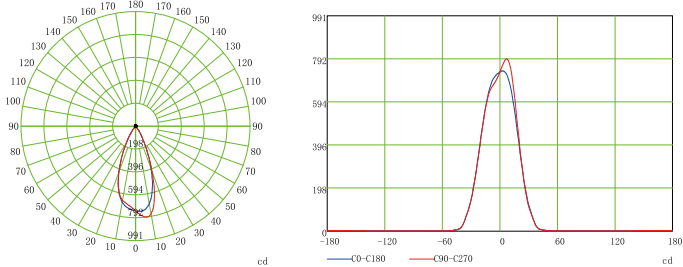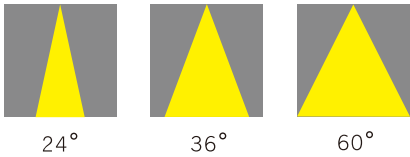

SUPERSLIM

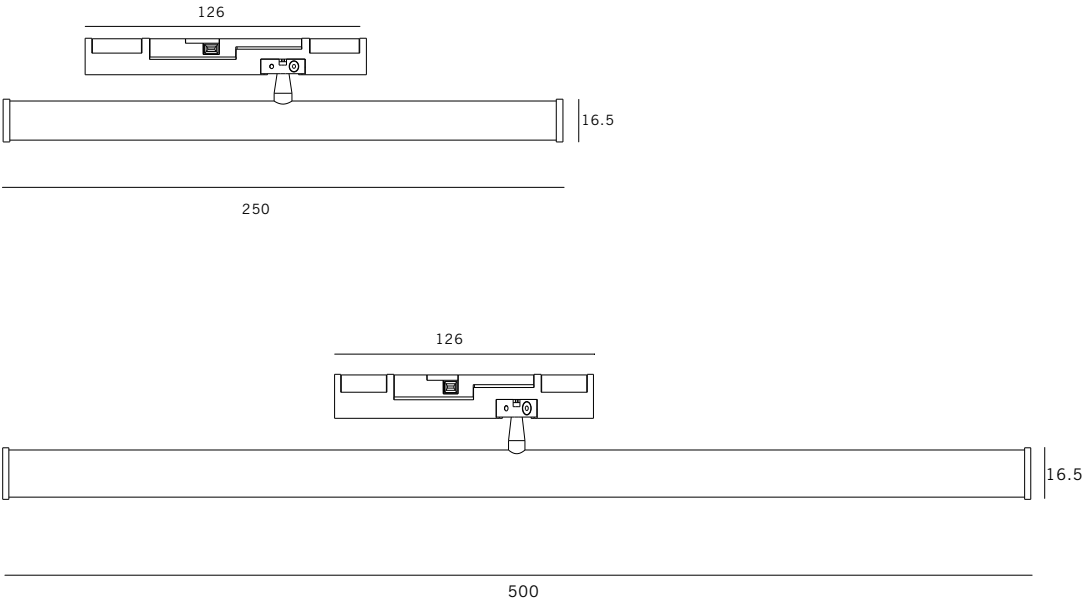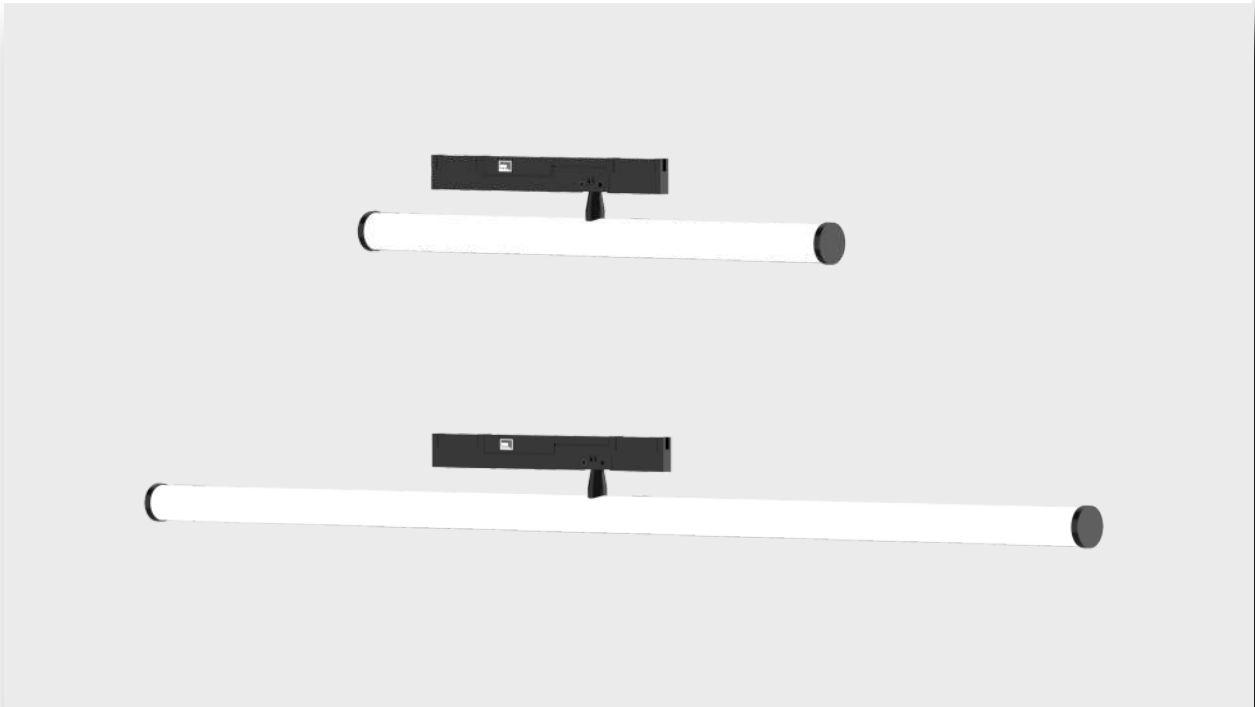


Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
5W	Ra90	48V	Φ 16.5x250*126	BK WH	2700K	O-10V
					3000K	Silicon control
10W	Ra90	48V	Φ 16.5x500*126		4000K	DALI
					5000K	
				2700-6500K		

Beam angle



100°

SUPERSLIM

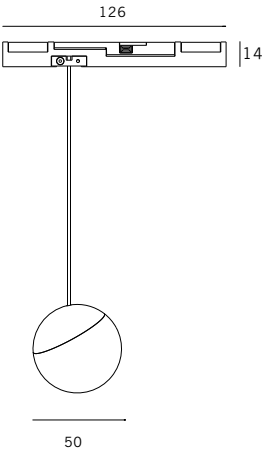

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

7W

Ra90

48V

Φ 50x14X126

- BK
- WH

2700K
3000K
4000K
5000K
2700-6500K

O-10V
Silicon control
DALI

Beam angle



100°

