

# Lighting Catalog





LED Area Post Top Light

Page 4



LED Highbay Light

Page 5



LED Street Light

Page 6



LED Solar Area Light

Page 7



LED Stadium Light

Page 8



LED Floodlight/ Tunnel Light

Page 9



LED Gas Station/ Canopy Light

Page 10



LED Wallpack Light

Page 11



LED Solar Street Light

Page 12



LED Corn Light/Garden Light

Page 13



LED Retrofit Kit

Page 13



LED Linear Highbay/ LED Tri-proof Light

Page 14



LED Growth Light

Page 15



LED Work Light/Temporary Working Light

Page 16



Adjustable power/color temperature all in one

Page 17



Specification:

Power	Size
30W	Ø345x563mm
50W	Ø345x563mm
75W	Ø345x563mm
100W	Ø345x563mm
150W	Ø345x563mm



Specification:

Power	Size
30/50/75W	Ø345x563mm
75/100/120/150W	Ø345x563mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:

Power	Size
50W	Ø379x350mm
100W	Ø379x350mm
150W	Ø379x350mm
200W	Ø379x350mm



Specification:

Power	Size
60W	Ø360x504mm
100W	Ø360x504mm
50W	Ø360x504mm



Specification:

Power	Size
60W	Ø450x542mm
80W	Ø450x542mm
100W	Ø450x542mm
120W	Ø450x542mm



Specification:

Power	Size
30W	Ø365x536mm
50W	Ø365x536mm

IC type



Specification:

Power	Size
30W	Ø450x524mm
40W	Ø450x524mm
50W	Ø450x524mm
60W	Ø450x524mm
80W	Ø450x524mm
100W	Ø450x524mm
120W	Ø450x524mm



Specification:

Power	Size
200W	420*420*463mm
240W	420*420*463mm
320W	420*420*463mm



Specification:

Power	Size
100W	Ø620x375mm
120W	Ø620x375mm
150W	Ø620x375mm






Specification:

Power	Size
30W	Ø400x700mm
50W	Ø400x700mm
75W	Ø400x700mm
100W	Ø400x700mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design IP67 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell
- 5 years warranty

Installation Method:

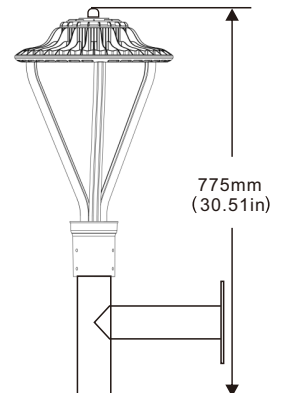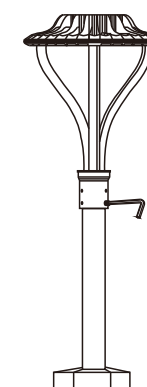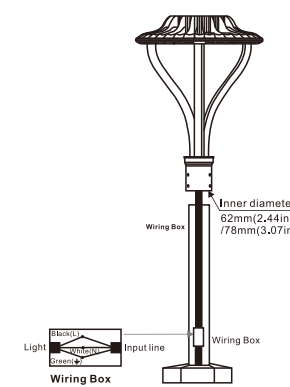

Application:

- Garden lighting.
- Community lighting.
- Campus lighting.
- Parking lot lighting.
- Street lighting.





Specification:

Power	Size
60W	Ø230x111mm
100W	Ø280x164mm
150W	Ø338x167mm
200W	Ø400x164mm
240W	Ø400x172mm
300W	Ø400x255mm



Specification:

Power	Size
60/75/100/120W	Ø290x174mm
75/100/120/150W	Ø340x181mm

Adjustable power/ color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:

Power	Size(Cover)
60W	Ø310x187mm
100W	Ø310x150mm
150W	Ø310x105mm
200W	Ø410x205mm
240W	Ø410x205mm
300	Ø410x205mm
400W	Ø575x205mm



Specification:

Power	Size
100W	Ø250x178mm
150W	Ø300x181mm
200W	Ø345x183mm

PC cover or Aluminum cover



Specification:

Power	Size
30W	Ø250x110mm
50W	Ø250x110mm



Specification:

Power	Size
100W	Ø290x174mm
150W	Ø340x181mm
200W	Ø380x183mm




Specification:

Power	Size
100W	Ø250x110mm
150W	Ø300x130mm
200W	Ø345x130mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation. And lower maintenance
- Air cooling design IP65 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell. Microwavew sensor
- 5 years warranty

Installation Method:

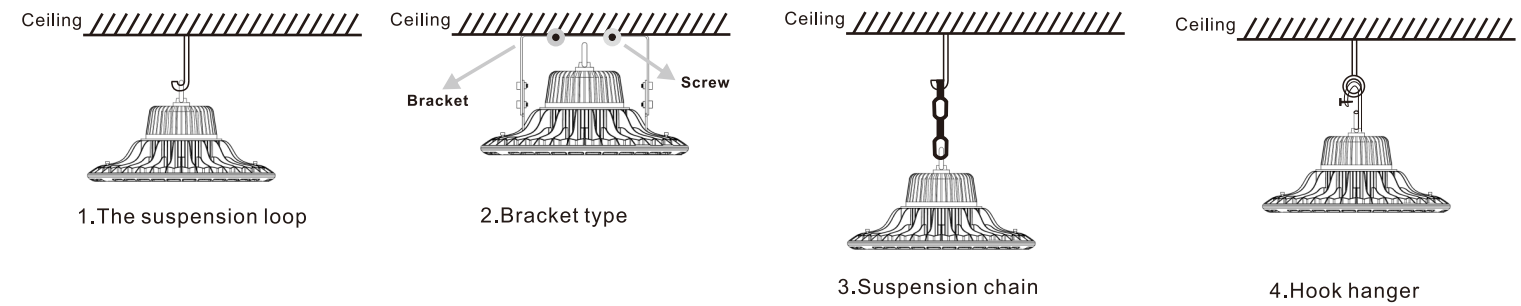

Application:


- Parking area lighting
- Warehouse lighting
- Workshop lighting
- Indoor stadium lighting
- Factories lighting



Warehouse lighting



Factories lighting

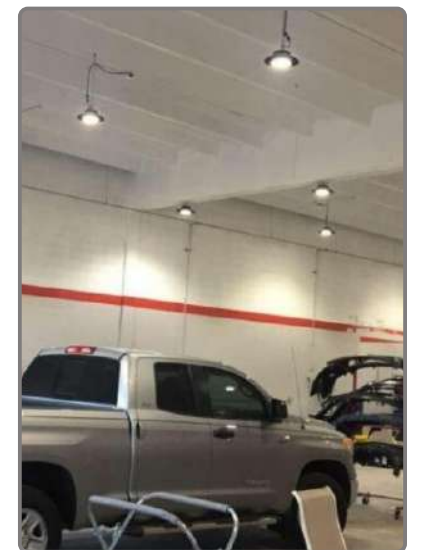

Garage lighting

Specification:

Power	Size
50W	616x250x72mm
100W	616x250x72mm
150W	616x250x72mm



Specification:

Power	Size
200W	616x420x80mm
240W	616x420x80mm
300W	616x420x80mm

Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof.
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip67 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell. Microwavew sensor
- 5 years warranty

Specification:

Power	Size
50/80/100/120W	616x250x72mm



Specification:

Power	Size
100/150/200/240W	616x250x72mm

Optional type:



Standard: no sensor    Photocell sensor    Microwave sensor    Adjustable power and CCT ( All in one)

Specification:

Power	Size
100W	536x316x70mm
150W	536x316x70mm
240W	625x316x70mm
300W	710x316x80mm




Specification:

Power	Size
50W	560* 200* 98mm
100W	610* 245* 98mm
150W	660* 245* 98mm
200W	712* 300* 98mm
300W	714* 340*98mm

Installation Method:



Slip Fiter    Arm Mount    Trunnion-A

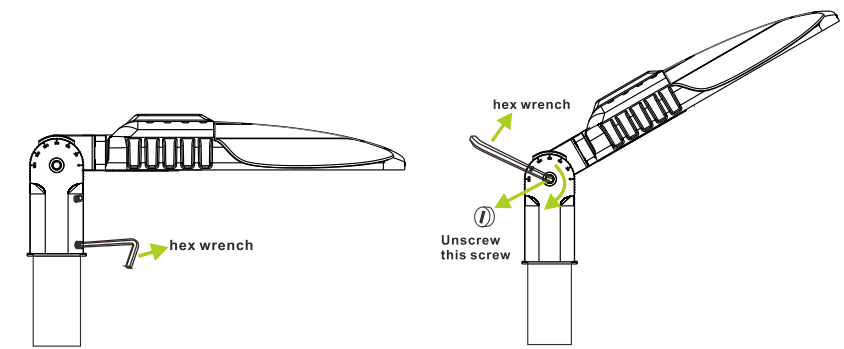

Specification:

Power	Size
50W	568* 200* 109mm
100W	613* 240* 109mm
150W	680* 260* 109mm
200W	693* 300* 109mm
300W	793* 300* 109mm



Specification:

Power	Size
50W	463* 173* 87mm
100W	611* 240* 89mm
150W	680* 260* 89mm

Specification:

Power	Size
50W	522*205*90mm
100W	508*291*94mm
150W	569*291*94mm
200W	680*307*94mm
300W	842*307*94mm



Specification:

Power	Size
50W	408* 230*105mm
100W	508* 230*105mm
150W	600* 257*108mm

Application:

- Area lighting/Street lighting
- Industrial lighting
- Stadium lighting
- Port wharf lighting
- Roadway lighting



Street scapes lighting



Roadway lighting



Roadway lighting

Specification:

Power	Size
50W	460* 230* 180mm
100W	585* 290* 185mm
150W	645* 290* 185mm



## LED Solar Area Lights



## LED Solar Street Light

### Specification:

Power	Size
15W	Ø405x535mm
20W	Ø405x535mm
25W	Ø540x529mm
40W	Ø540x529mm
50W	Ø850x529mm
80W	Ø850x529mm
100W	Ø850x529mm



### Specification:

Power	Size
15W	410x365x41mm
20W	410x365x41mm
25W	410x365x41mm
40W	410x365x41mm
50W	680x510x41mm
80W	680x510x41mm
100W	680x510x41mm



### Specification:

Power	Size
50W	615*365*160mm
80W	720*365*160mm
100W	930*365*160mm



### Specification:

Power	Size
100W	887*400*280mm
150W	1160*400*280mm
200W	1435*400*280mm



### Specification:

Power	Size
15W	Ø405x582mm
20W	Ø405x582mm
25W	Ø540x571mm
40W	Ø540x571mm
50W	Ø850x680mm
80W	Ø850x680mm
100W	Ø850x680mm



### Specification:

Power	Size
15W	393x365x538mm
20W	393x365x538mm
25W	393x365x538mm
40W	393x365x538mm
50W	510x647x618mm
80W	510x647x618mm
100W	510x647x618mm



### Specification:

Power	Size
10W	460*225*50mm
15W	460*225*50mm
20W	670*320*50mm
30W	670*320*50mm
40W	840*370*50mm
50W	1030*370*44mm
80W	1140*425*44mm
100W	1400*540*44mm
120W	1400*540*44mm



### Specification:

Power	Size
100W	887*400*280mm
150W	1160*400*280mm
200W	1435*400*280mm



Slant Design

Slant Design

### Specification:

Power	Size
5W	Ø250x495mm
10W	Ø250x495mm



### Specification:

Power	Size
5W	Ø250x384mm
10W	Ø250x384mm

### Key Features:

- ▶ The patented product adopts the integrated design of battery pack and lamp body controller.
- ▶ Fully automatic intelligent light control, time control, remote control function, charging during the day and automatically lighting at night.
- ▶ It adopts one-piece aluminum casing, imported high-efficiency light source, full power solar panel, anti-corrosion, waterproof and lightning protection.
- ▶ This product is specially designed for outdoor outdoor lighting, easy to install. Solar power supply, 0 wiring, nail wall, pole, holding cement column and other installation methods.
- ▶ Suitable for highways, town roads, street lights, rural roads, park lights, courtyard lighting, channel lighting, farms, etc.
- ▶ This product solar panel energy efficiency conversion rate of 18% or more, normal sunshine charging more than 8 hours, can supply 3-4 rainy days. Evening (12 hours per night). High temperature resistance 80 degrees, low temperature resistance minus 20 degrees.

### Specification:

Power	Size
5W	Ø250x743-984mm
10W	Ø250x743-984mm



### Specification:

Power	Size
5W	Ø250x384mm
10W	Ø250x384mm

### Application:

- ▶ Area lighting/Street lighting
- ▶ Industrial lighting
- ▶ Stadium lighting
- ▶ Port wharf lighting
- ▶ Roadway lighting
- ▶ Airports lighting.



### Application:





### Specification:

Power	Size
300W	463*400*220mm
400W	530*480*352mm
500W	652*562*352mm
600W	652*562*352mm
800W	786*640*390mm
1000W	786*640*390mm



### Specification:

Power	Size
450W	563x335x313mm
900W	665x494x603mm
1350W	665x733x885 mm
1800W	1166x494x603mm



### Specification:

Power	Size
480W	696x414x658mm
720W	603x414x850mm
960W	696x414x850mm
1200W	949x414x580mm



(Pole mounting)



### Specification:

Power	Size
480W	696x414x658mm
720W	603x414x850mm
960W	696x414x850mm
1200W	949x414x580mm



### Specification:

Power	Size
200W	L436*W323*H111
300W	L436*W418*H111
400W	L436*W525*H111
600W	L436*W747*H111
800W	L850*W580*H188
1200W	L809*W799*H144



### Specification:

Power	Size
300W	L446*W321*H483
600W	L537*W373*H581




### Specification:

Power	Size
500W	L598*W416*H290
1000W	L770*W549*H376

## Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design, IP66 Rated enclosure
- Replacing 1500W-6000W Metal Halide
- Beam Angle is complete which can meet all Angle requirements
- Thermal Control Technology. Using advanced finite element analysis technology to optimize product heat dissipation structure design
- 5 years warranty

## Installation Method:

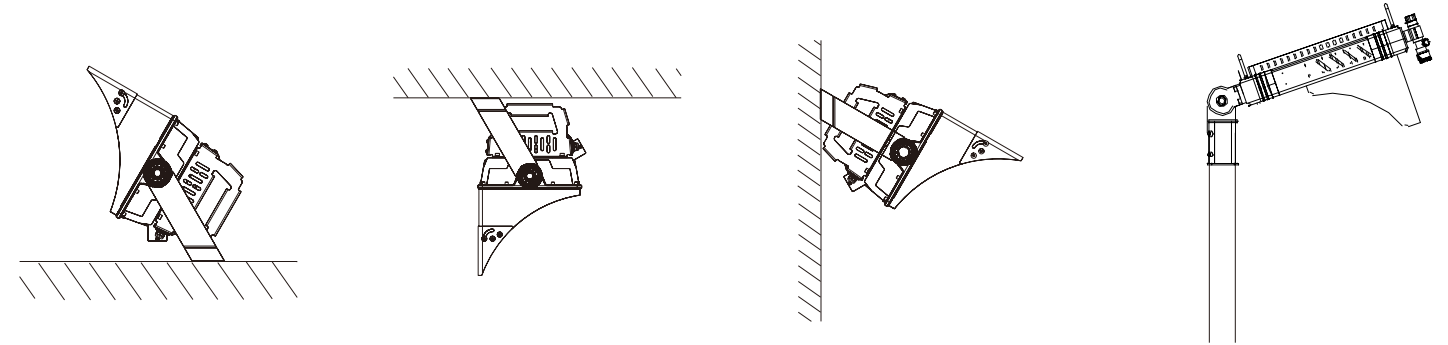

## Application:

- Outdoor stadium
- Indoor stadium
- Golf course
- Football field
- Rugby field
- Outdoor/Indoor basketball court





### Specification:

Power	Size
50W	547*250*74mm
100W	547*250*74mm
150W	547*250*74mm
200W	547*250*74mm
240W	547*420*80mm
300W	547*420*80mm



### Specification:

Power	Size
10W	166*107*32mm
20W	216*152*40mm
30W	226*167*40mm
50W	310*220*50mm
80W	345*245*55mm
100W	402*345*60mm
150W	430*365*60mm
200W	470*360*60mm
300W	565*475*65mm
450W	585*559*70mm



### Specification:

Power	Size
100W	426*378*105mm
150W	426*378*105mm
200W	546*378*105mm
300W	670*378*105mm



### Specification:

Power	Size
60W	322*229*73mm
80W	322*387*73mm



### Specification:

Power	Size
50W	95*315*130mm
100W	190*315*130mm
150W	285*315*130mm
200W	370*315*130mm
250W	455*285*130mm
300W	272*570*130mm
400W	370*570*130mm
500W	470*570*130mm
600W	570*570*130mm
800W	740*570*130mm
900W	848*570*130mm
1000W	584*607*130mm
1250W	716*607*130mm
1500W	848*607*130mm





### Specification:

Power	Size
250W	590*190*200mm
500W	630*240*280mm
750W	630*240*435mm
1000W	630*240*590mm
1250W	630*240*745mm
1500W	630*240*900mm

## Key Features:


- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip66 Rated enclosure
- Replacing 30W-6000W Metal Halide
- Beam Angle is complete which can meet all Angle requirements
- Replace conventional Flood Lights
- 5 years warranty

## Installation Method:

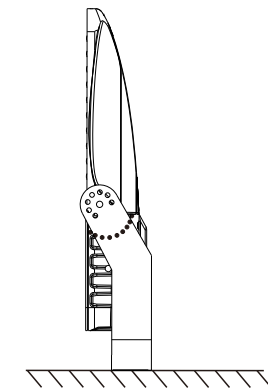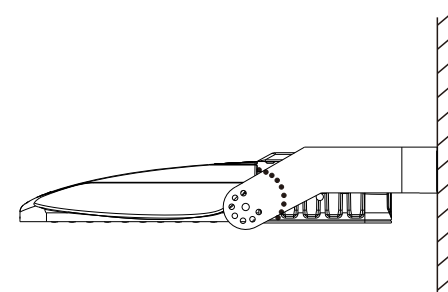

## Application:

- Outdoor stadium
- Indoor stadium
- Golf course
- Football field
- Rugby field
- Tunnel Lighting

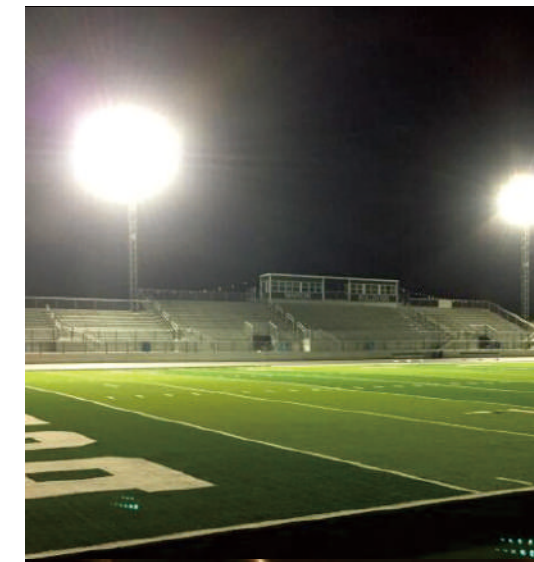






**Specification:**

Power	Size
60W	420*420*67mm
100W	420*420*67mm
150W	420*420*67mm
200W	540*540*67mm
240W	540*540*67mm
300W	540*540*67mm



**Specification:**

Power	Size
100W	550*550*30mm
150W	550*550*30mm
200W	550*550*30mm



**Specification:**

Power	Size
40W	280*280*40mm
60W	280*280*40mm
80W	280*280*40mm
100W	382*382*49mm
120W	382*382*49mm
150W	382*382*49mm



**Specification:**

Power	Size
50W	420x240x82mm
100W	420x320x82mm
150W	
200W	480x500x82mm
250W	562x600x82mm



**Specification:**

Power	Size
200W	480x480x235mm



**Specification:**

Power	Size
50W	245x245x85mm
75W	245x245x85mm
100W	314x314x95mm
120W	314x314x95mm



**Specification:**

Power	Size
20/30/40/60W	262x262x73mm
60/80/100/120W	352x352x82mm



**Specification:**

Power	Size
40/60/80/100W	∅308x72mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



**Specification:**

Power	Size
150W	415x405x141mm
200W	415x405x141mm



**Specification:**


Power	Size
80/100/120/150W	420x420x67mm
120/160/200/240W	540x540x67mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

**Key Features:**


- High performance LED fixture 130lm/W
- Imported original CREE XTE or Lumileds 3030 LED Chip
- Variety of mounting options
- The surface of lamp housing is anti-corrosion and electrophoresis processed.
- Dust-proof, moisture proof and waterproof ,IP65 rated
- Excellent optics design, higher luminous efficiency. uniform light spot, high efficiency, low glare
- Compare to traditional lamps can save energy 70%-80%
- Easy & quick Installation

**Installation Method:**

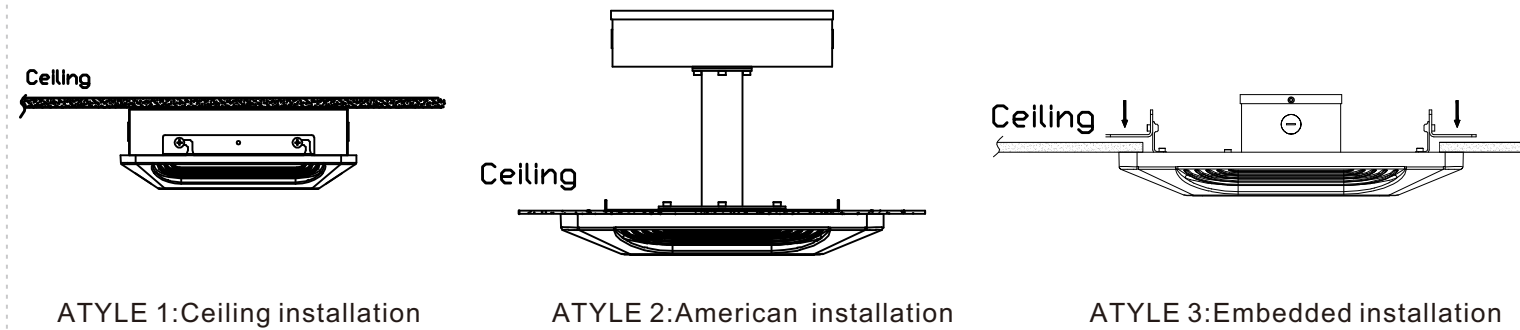

**Application:**

- Gas station lighting.
- Petroleum canopies lighting.
- CNG fueling stations lighting.
- Low-medium bay general lighting.
- Soffits lighting.
- Garage lighting.

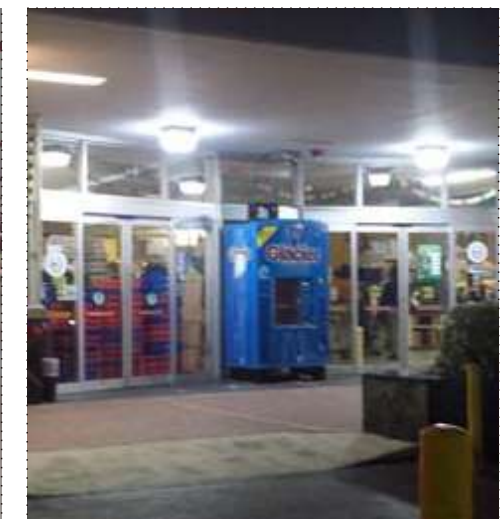



**Specification:**

Power	Size
45W	363x234x196mm
60W	363x234x196mm
80W	363x234x196mm
100W	363x234x196mm
120W	363x234x196mm
140W	363x234x196mm



**Specification:**

Power	Size
35W	320x132x115mm
55W	320x132x115mm
80W	320x132x115mm
100W	320x132x115mm



**Specification:**

Power	Size
75/100/120W	320x132x115mm



**Specification:**

Power	Size
60W	322x265x241mm
100W	322x265x241mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



**Specification:**

Power	Size
30W	201x167x90mm
70W	285x240x160mm
100W	285x240x160mm



**Specification:**

Power	Size
2*3W	65*160mm
2*5W	90*260mm
2*10W	110*300mm
2*15W	145*300mm
2*18W	145*300mm
2*20W	160*300mm



**Specification:**

Power	Size
40W	290x176x130mm
60W	290x176x130mm




**Specification:**

Power	Size
45W	333x159x250mm
60W	333x159x250mm
80W	333x159x250mm
100W	333x159x250mm
120W	333x159x250mm
140W	333x159x250mm

**Key Features:**

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip66 Rated enclosure
- Replacing 30W-300W Metal Halide
- ETL CETL CE ROHS listed
- 5 years warranty

**Installation Method:**

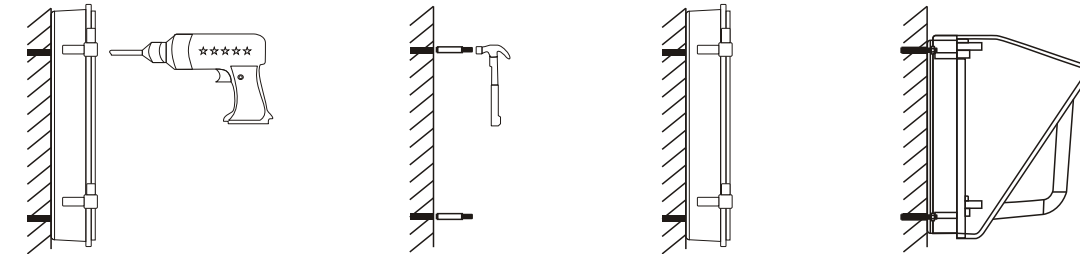

**Application:**

- Parking lot Lighting.
- Garden yard Lighting.
- Outdoor Building Lighting.
- High/Low Bay Lighting.
- Building facades lighting.
- Sidewalks lighting.





**Specification:**



Power	Size
50W	615*365*160mm
80W	720*365*160mm
100W	930*365*160mm



**Specification:**



Power	Size
100W	887*400*280mm
150W	1160*400*280mm
200W	1435*400*280mm



**Specification:**



Power	Size
40W	760*430*150mm
50W	910*430*150mm
60W	1160*430*150mm



**Specification:**



Power	Size
20W	800*416*153mm
30W	800*416*153mm
40W	800*416*153mm



**Specification:**




Power	Size
80W	513*302*50mm
100W	730*320*50mm


**Key Features:**

- Fully automatic intelligent light control, time control, remote control function, charging during the day and automatically.
- It adopts one-piece aluminum casing, imported high-efficiency light source, full power solar panel, anti-corrosion, waterproof and lightning protection.
- This product is specially designed for outdoor outdoor lighting, easy to install. Solar power supply, 0 wiring, nail wall, pole, holding cement column and other installation methods.
- Suitable for highways, town roads, street lights, rural roads, park lights, courtyard lighting, channel lighting, farms, etc.
- 5 years warranty.

**Installation Method:**

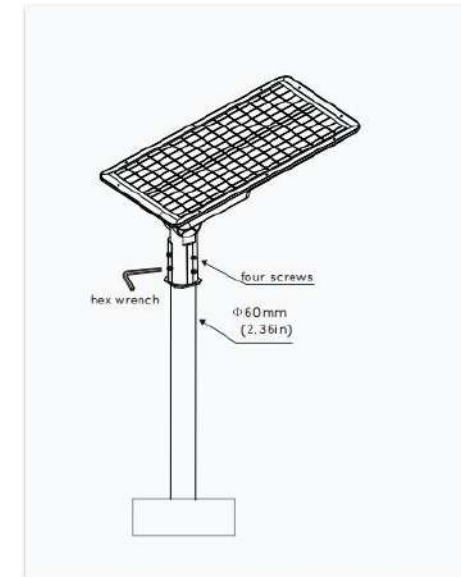

1.Round pole Mounting

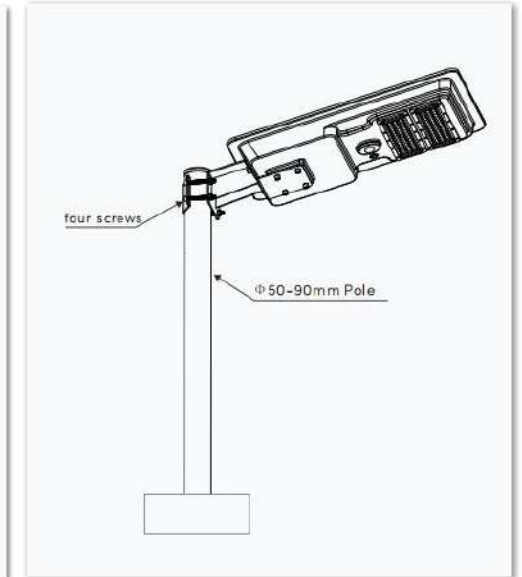

2.Bracket Mounting

**Application:**

- Parking lot Lighting.
- Street lighting
- Courtyard lighting
- Campus lighting
- Stadium lighting
- Park lighting



# LED Corn Light/Garden Light



## Specification:



Power	Size
20W	Ø 100*215mm
30W	Ø 100*215mm
40W	Ø 100*215mm
50W	Ø 100*250mm
60W	Ø 100*250mm
80W	Ø 128*271mm
100W	Ø 128*301mm
120W	Ø 128*331mm
150W	Ø 128*331mm



## Specification:

Power	Size
6W	Ø 130*45mm
8W	Ø 136*45mm
10W	Ø 145*45mm
12W	Ø 165*45mm
15W	Ø 175*45mm



## Specification:



Power	Size
30W	Ø 128*183mm
40W	Ø 128*183mm
50W	Ø 128*183mm
60W	Ø 128*183mm
80W	Ø 128*183mm



## Specification:

Power	Size
30W	Ø 150*185mm
40W	Ø 150*185mm
50W	Ø 150*185mm
60W	Ø 150*185mm
80W	Ø 150*185mm



## Specification:




Power	Size
30W	Ø 88*265mm
40W	Ø 88*265mm
50W	Ø 88*265mm

## Key Features:

- High performance LED fixture 130lm/W
- MH/HPS/HID/MHL/CFL lamp retrofit
- Screw Base Direct Install by bypass ballast
- 100% Die Casting Heat Sink
- Universal Base E26/E27E39/E40/EX39
- ETL CETL CE ROHS listed
- Stable and durable, easy installment and maintenance

## Installation Method:

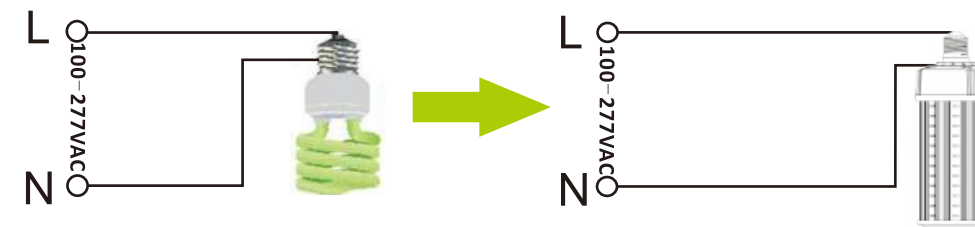

E39/E40/Ex39 CFL

E39/E40/Ex39 LED Lamp

## Application:

- Sports Light/Post Top Light.
- Flood Light/Pole Light.
- High/Low Bay Light
- Roadway Light/Street Light/Billboard Light.
- Other application roadway.

# LED Retrofit Kit



## Specification:



Power	Size
60W	270*145mm
80W	270*145mm
100W	270*190mm
120W	270*190mm
150W	270*190mm
240W	450*330mm
300W	450*330mm



## Specification:

Power	Size
60W	Ø 300*330mm
80W	Ø 300*330mm
100W	Ø 300*330mm
120W	Ø 300*350mm
150W	Ø 300*350mm
370W	Ø 365*340mm
480W	Ø 300*340mm



## Specification:



Power	Size
60/80/100/120W	270*190mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.





### Specification:



Power	Size
100W	608*158*74mm
150W	608*158*74mm
200W	608*400*68mm
240W	1216*400*68mm
320W	1216*400*68mm



### Specification:



Power	Size
60W	2FT:590x293mm
100W	4FT:1173x293mm
150W	
200W	
240W	
300W	

### Specification:



Power	Size
60W	2FT:590x293mm
100W	4FT:1173x293mm
150W	
200W	
240W	
300W	



Troffer 1' x 4'

### Specification:



Power	Size
25W	1213*303*50mm
40W	1213*303*50mm

### Specification:



Power	Size
25W	603*603*45mm
40W	603*603*45mm



Troffer 2' x 2'



### Specification:



Power	Size
20W	600*83*48mm
30W	900*83*48mm
40W	1200*83*48mm
50W	1200*83*48mm
60W	1500*83*48mm

### Specification:



Power	Size
35W	1213*603*45mm
50W	1213*603*45mm



Troffer 2' x 4'

## Key Features:

- High performance LED fixture 130lm/W
- Replace conventional Linear Highbay Lights
- Precision Die Cast Aluminum Housing
- Fade Resistant Powder Coat Finish
- Stable and durable, easy installation and lower maintenance

## Installation Method:

• Suspension chain mounting




• Ceiling installation



## Application:

- Parking areas lighting.
- Warehouse Lighting.
- Industrial workshop lighting.
- Stadium Lighting.
- Airport Lighting.
- Office lighting.

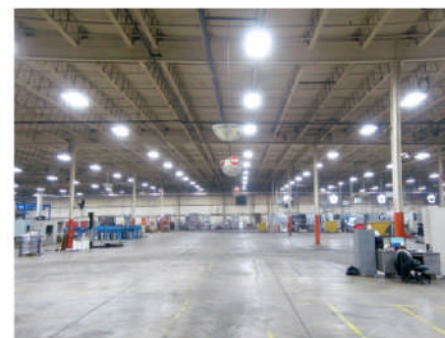



Folding design

### Specification:

Power	Size
400W	L1004*W567*H46mm
500W	L1004*W720*H46mm
600W	L1004*W1121*H46mm
800W	L1004*W1121*H46mm
1000W	L1004*W1680*H46mm
1200W	L1004*W1680*H46mm
1500W	L1004*W2210*H46mm
1600W	L1004*W2210*H46mm



Folding design

### Specification:

Power	Size
300W	L576*W550*H31mm
400W	L730*W806*H31mm
480W	L730*W806*H31mm



Detachable style

### Specification:

Power	Size
600W	L689*W1128*H34mm
640W	L689*W1128*H34mm
720W	L1104*W1128*H34mm
800W	L1104*W1128*H34mm
1000W	L1104*W1128*H34mm




### Specification:

Power	Size
300W	L1004*W560*H46mm
400W	L1004*W560*H46mm
500W	L1004*W840*H46mm
600W	L1004*W840*H46mm



### Specification:

Power	Size
400W	L608*W903*H101mm
600W	L918*W903*H101mm
800W	L1049*W903*H101mm
1000W	L1149*W903*H101mm
1200W	L1189*W903*H101mm
1500W	L1749*W903*H101mm
1600W	L1869*W903*H101mm

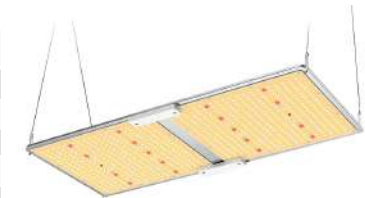

### Specification:

Power	Size
100W	L300*W240*H54mm
200W	L600*W240*H54mm
400W	L600*W480*H54mm
600W	L720*W600*H54mm



### Specification:

Power	Size
100W	L908*W63*63mm
200W	L908*W198*103mm
300W	L908*W338*113mm



### Specification:

Power	Size
640W	L1060*W120*260mm



### Specification:

Power	Size
100W	Ø280x164mm
150W	Ø338x167mm
200W	Ø400x164mm
240W	Ø400x172mm
300W	Ø400x255mm



### Specification:


Power	Size
800W	722x315x112mm



## Key Features:

- Full spectrum light output
- Samsung LED chips
- Ip65 waterproof, Use in moist environment
- Includes remote dimmer
- 0/1-100% knob dimmer
- Added red light for enhanced flowering
- UL listed power supply(IP 67)
- Aluminum alloy with white/black coat
- Energy efficient, low heat output
- No fans or moving parts, silent running
- Excellent heat dissipation
- Easy Installation
- Control multiple units with iLink technology
- Lightweight slimline design

## Installation Method:

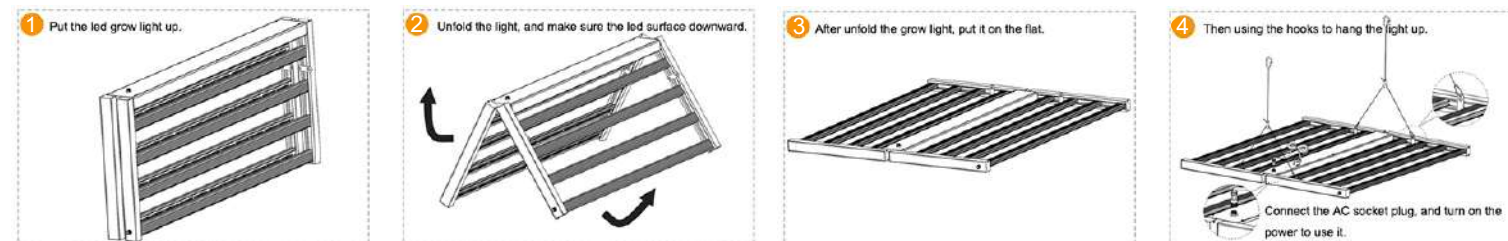

## Application:

- Grow tent
- Greenhouse
- Horticulture lighting
- Hydroponic cultivation
- Industry hempgrowth
- Marijuana Cannabis lighting
- Indoor planting growth
- Farming plants research






**Specification:**

Power	Size
30W	L1202*H339
50W	L1202*H339



**Specification:**

Power	Size
30W	L1266*H335
50W	L1266*H335

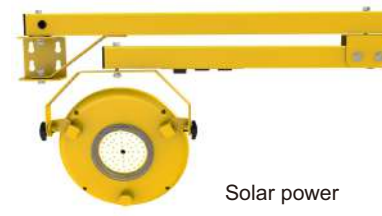

Solar power

**Specification:**

Power	Size
5W	L1202*H339
10W	L1202*H339



**Specification:**

Power	Size
5W	L110*W47*H583
10W	L110*W47*H583




**Specification:**

Power	Size
20W	Ø110*262mm
30W	Ø110*262mm
40W	Ø110*262mm
50W	Ø110*297mm
60W	Ø110*297mm
80W	Ø150*375mm
100W	Ø150*375mm
120W	Ø150*375mm
150W	Ø150*375mm



**Specification:**

Power	Size
80W	H2032x880mm
100W	H2032x880mm
120W	H2180x1200mm
150W	H2180x1200mm

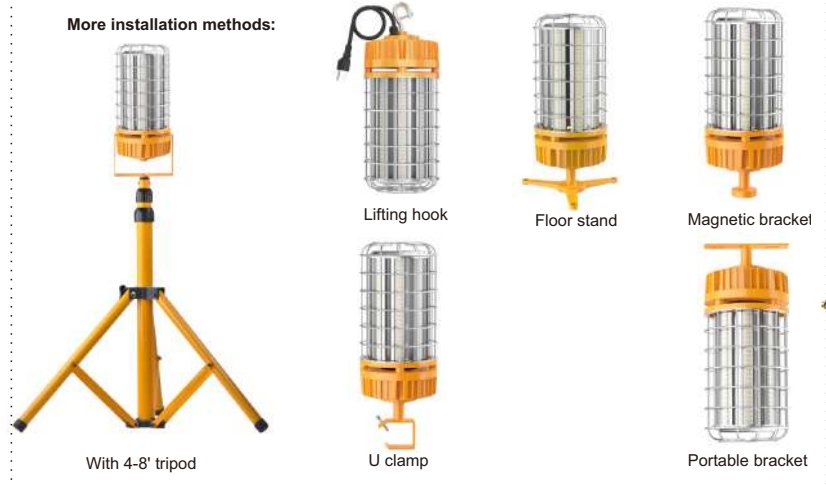

**Specification:**

Power	Size
20W	Ø100x154mm
100W	Ø100x154mm
200W	Ø100x154mm

5 lights or 10 lights per string



**Specification:**

Power	Size
300W	Ø110x297mm

5 lights or 10 lights per string



**Specification:**

Power	Size
2X50W	H600(min)-3500(max)*W700




**Specification:**

Power	Size
2X50W	H1813(min)-5500(max)*W1200

**Key Features:**

- Reliability: LED dock light is high impact resistant with appropriate structure design; with polyester powder coated surface; long time use in high and temperature and corrosive environment
- Safety: dust proof and water proof with tightening structure for the loading dock light
- Energy-saving: high efficient semiconductor light-emitting technology, Solar power, zero electricity
- Economy: long lifespan LED SMD; maintenance-free
- Convenience: U-tape bracket Mounting
- Uniqueness: providing excellent optical performance by adopting high reflecting, high transmittance focus lens
- Over 50000 hours lifetime and offer 5 years warranty


**Product Diagram:**

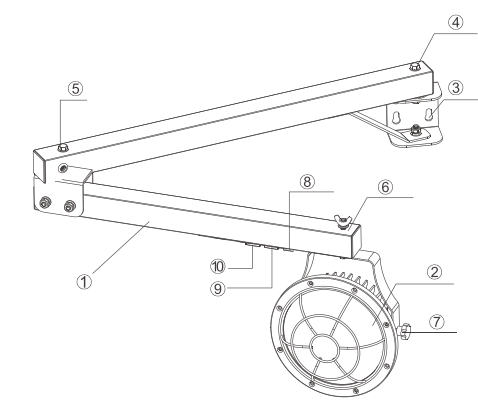

- 1 Bracket
- 2 LED Lmap
- 3 M8 screw hole × 4
- 4 180° rotatable joint
- 5 330° rotatable joint
- 6 7 360° rotatable joint
- 8 Switch
- 9 10 Receptacle on bracket

**Application:**

- Factory Lighting.
- Dock Lighting.
- Warehouse Lighting.
- Goods shelf Lighting.
- Container Lighting.

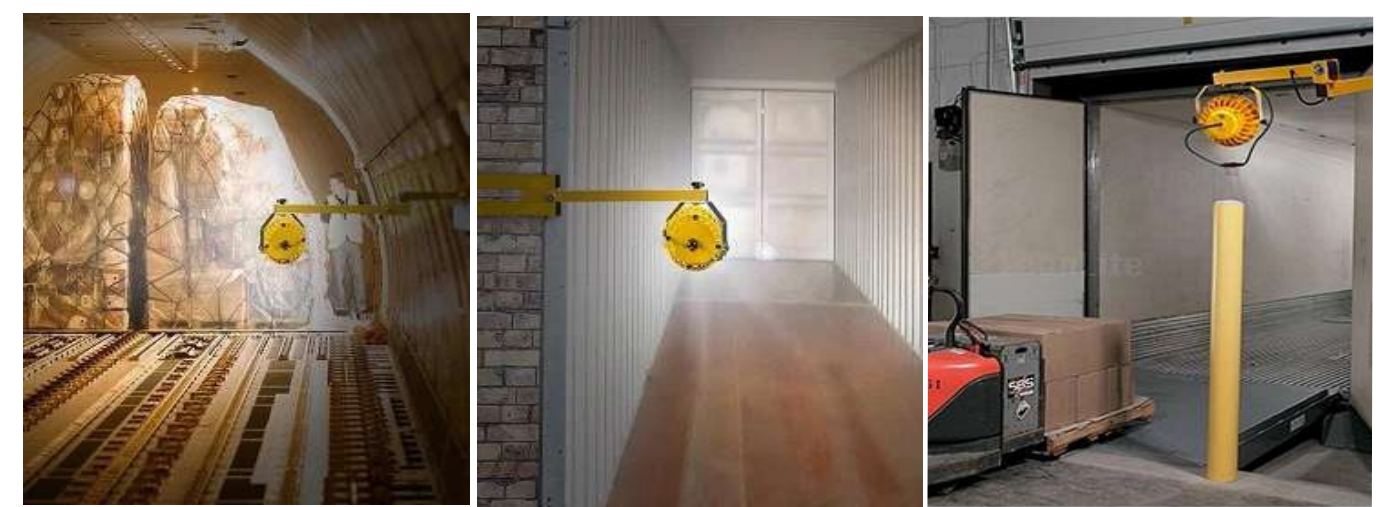

All styles as follows:



Specification:



Power	Size
30/50/75W	Ø345x563mm
75/100/120/150W	Ø345x563mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
50/80/100/120W	616x250x72mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
20/30/40/60W	262x262x73mm
60/80/100/120W	352x352x82mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
20/30/40/60W	320x132x115mm
60/80/100/120W	320x132x115mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
60/80/100/120W	270*190mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
60/75/100/120W	Ø290x174mm
75/100/120/150W	Ø340x181mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
100/150/200/240W	616x250x72mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
40/60/80/100W	Ø308x72mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
30/45/60/80W	290x176x130mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
80/100/120/150W	420x420x67mm
120/160/200/240W	540x540x67mm

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
150/200/240/320W	1216*400*68mm

Adjustable Power/CCT all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size(Lamp)
30W/50W-2in1	Ø205x124mm

Adjustable Power/CCT all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size(Lamp)
20/30/40/50W-4in1	248x248x85mm

Adjustable Power/CCT all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
30/50/75W	Ø400x700mm
75W/100W/120W/150W	Ø400x700mm

Adjustable Power/CCT all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



Specification:



Power	Size
30/40/50/60W	Ø100x250mm
80/100/120/150W	Ø128x301mm

Adjustable Power/CCT all in one  
3 gears adjustment: 3000K, 4000K, 5000K.