

Mini Fridges Catalog






配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

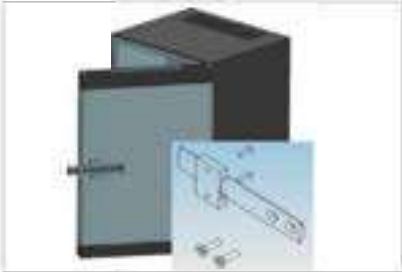

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GPS-01
功率 Power	60W
容积 Capacity	28L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	12/14KGS
外形尺寸 Unit size (WxDxH)	400x390x440mm
包装尺寸 Packing size	425x435x500mm
装箱量 Container loading	260/540/675 (20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A






配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

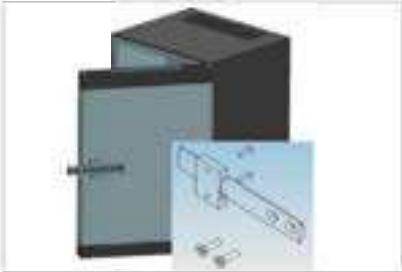

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GPS-02
功率 Power	60W
容积 Capacity	30L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	13/15KGS
外形尺寸 Unit size (WxDxH)	400x415x530mm
包装尺寸 Packing size	435x455x590mm
装箱量 Container loading	243/485/520 (20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A






配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

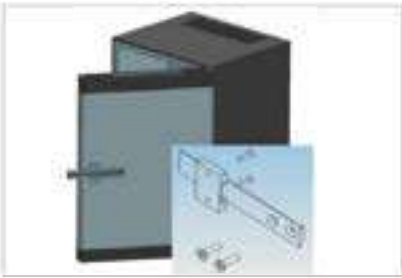

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GPS-03
功率 Power	60W
容积 Capacity	30L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	13/15KGS
外形尺寸 Unit size (WxDxH)	400x415x530mm
包装尺寸 Packing size	435x455x590mm
装箱量 Container loading	243/485/520 (20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A



吸收式客房冰箱系列



产品参数 PRODUCT SPECIFICATION

型号 Model	GP5-04
功率 Power	60W
容积 Capacity	32L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	14/15.5KGS
外形尺寸 Unit size (WxDxH)	435x435x460mm
包装尺寸 Packing size	475x475x520mm
装箱量 Container loading	192/384/480(20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airborne acoustical noise emission class	A


配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

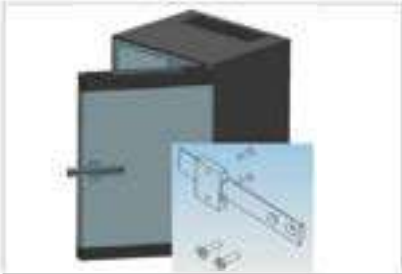

联动装置
Sliding guide




配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

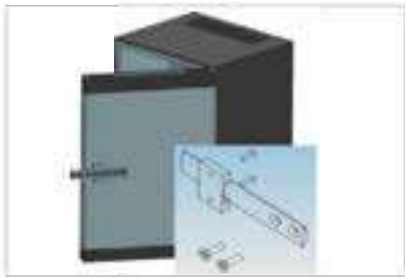

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GPS-05
功率 Power	60W
容积 Capacity	40L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	15/17KGS
外形尺寸 Unit size (WxDxH)	435x455x545mm
包装尺寸 Packing size	470x485x600mm
装箱量 Container loading	188/379/460(20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A






配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

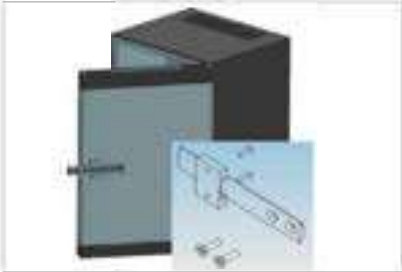

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GP5-06
功率 Power	60W
容积 Capacity	40L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	15/16.5KGS
外形尺寸 Unit size (WxDxH)	400x435x560mm
包装尺寸 Packing size	440x475x620mm
装箱量 Container loading	198/432/480 (20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A




配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

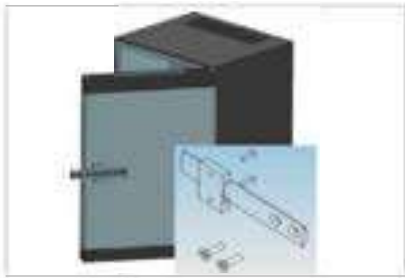

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GP5-07
功率 Power	60W
容积 Capacity	50L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	17/19KGS
外形尺寸 Unit size (WxDxH)	455x475x570mm
包装尺寸 Packing size	480x510x630mm
装箱量 Container loading	144/288/384 (20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A




配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

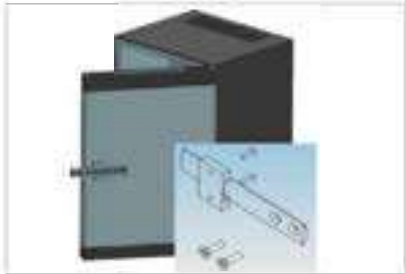

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION	
型号 Model	GP5-08
功率 Power	70W
容积 Capacity	62L
电压 Voltage	220V/110V/12V
净重 / 毛重 N.W./G.W.	18.5/20.5KGS
外形尺寸 Unit size (WxDxH)	486x506x595mm
包装尺寸 Packing size	535x545x665mm
装箱量 Container loading	120/252/336(20'GP/40'GP/40'HQ)
制冷系统 Cooling system	吸收式 (Absorption system)
制冷性能 Temp	0-8℃
噪音等级 Airbone acoustical noise emision class	A

THERMOELECTRIC
REFRIGERATOR



产品参数 PRODUCT SPECIFICATION

型号 Model	GP5-09
功率 Power	63W
容积 Capacity	30L
电压 Voltage	220V/110V
能耗等级 Energy efficiency class	E
净重 / 毛重 N.W./G.W.	11.5/12.5KGS
外形尺寸 Unit size (WxDxH)	400x425x485mm
包装尺寸 Packing size	430x450x545mm
装箱量 Container loading	260/520/624(20'GP/40'GP/40'HQ)
制冷系统 Cooling system	电子式 (Thermoelectric)
制冷性能 Temp	0-10°C
噪音等级 Airbone acoustical noise emision class	A


配置可选 /Available comfigurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

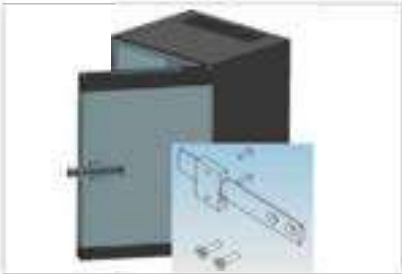

联动装置
Sliding guide

THERMOELECTRIC
REFRIGERATOR




配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

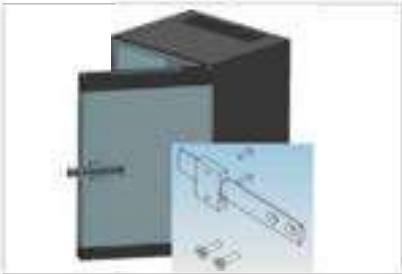

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GP5-10
功率 Power	63W
容积 Capacity	30L
电压 Voltage	220V/110V
能耗等级 Energy efficiency class	E
净重 / 毛重 N.W./G.W.	11.5/12.5KGS
外形尺寸 Unit size (WxDxH)	400x415x530mm
包装尺寸 Packing size	435x455x590mm
装箱量 Container loading	243/485/520(20'GP/40'GP/40'HQ)
制冷系统 Cooling system	电子式 (Thermoelectric)
制冷性能 Temp	0-10℃
噪音等级 Airbone acoustical noise emision class	A

THERMOELECTRIC
REFRIGERATOR




配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

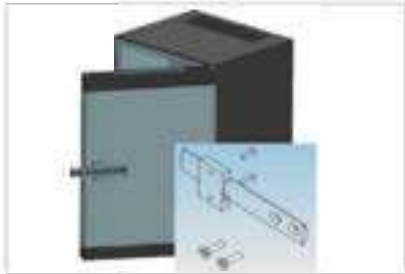

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GP5-11
功率 Power	63W
容积 Capacity	40L
电压 Voltage	220V/110V
能耗等级 Energy efficiency class	E
净重 / 毛重 N.W./G.W.	14.5/16.5KGS
外形尺寸 Unit size (WxDxH)	435x455x545mm
包装尺寸 Packing size	470x485x600mm
装箱量 Container loading	188/379/460 (20'GP/40'GP/40'HQ)
制冷系统 Cooling system	电子式 (Thermoelectric)
制冷性能 Temp	0-10℃
噪音等级 Airbone acoustical noise emision class	A

THERMOELECTRIC
REFRIGERATOR




配置可选 /Available configurations



实心门 / 玻璃门
Foamed door/glass door



加锁
Lock

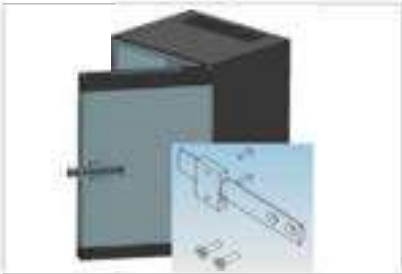

联动装置
Sliding guide



产品参数 PRODUCT SPECIFICATION

型号 Model	GPS-12
功率 Power	63W
容积 Capacity	62L
电压 Voltage	220V/110V
净重 / 毛重 N.W./G.W.	18/20KGS
外形尺寸 Unit size (WxDxH)	486x506x595mm
包装尺寸 Packing size	535x545x665mm
装箱量 Container loading	120/252/336(20'GP/40'GP/40'HQ)
制冷系统 Cooling system	电子式 (Thermoelectric)
制冷性能 Temp	0-10℃
噪音等级 Airbone acoustical noise emision class	A