

# Interior Lighting Catalog





# WALL LAMP SERIES

## WALL LAMP SERIES



GPSLB01



GPSLB02



GPSLB03



GPSLB04



GPSLB05



GPSLB06



GPSLB07




GPSLB08



GPSLB09

GPS

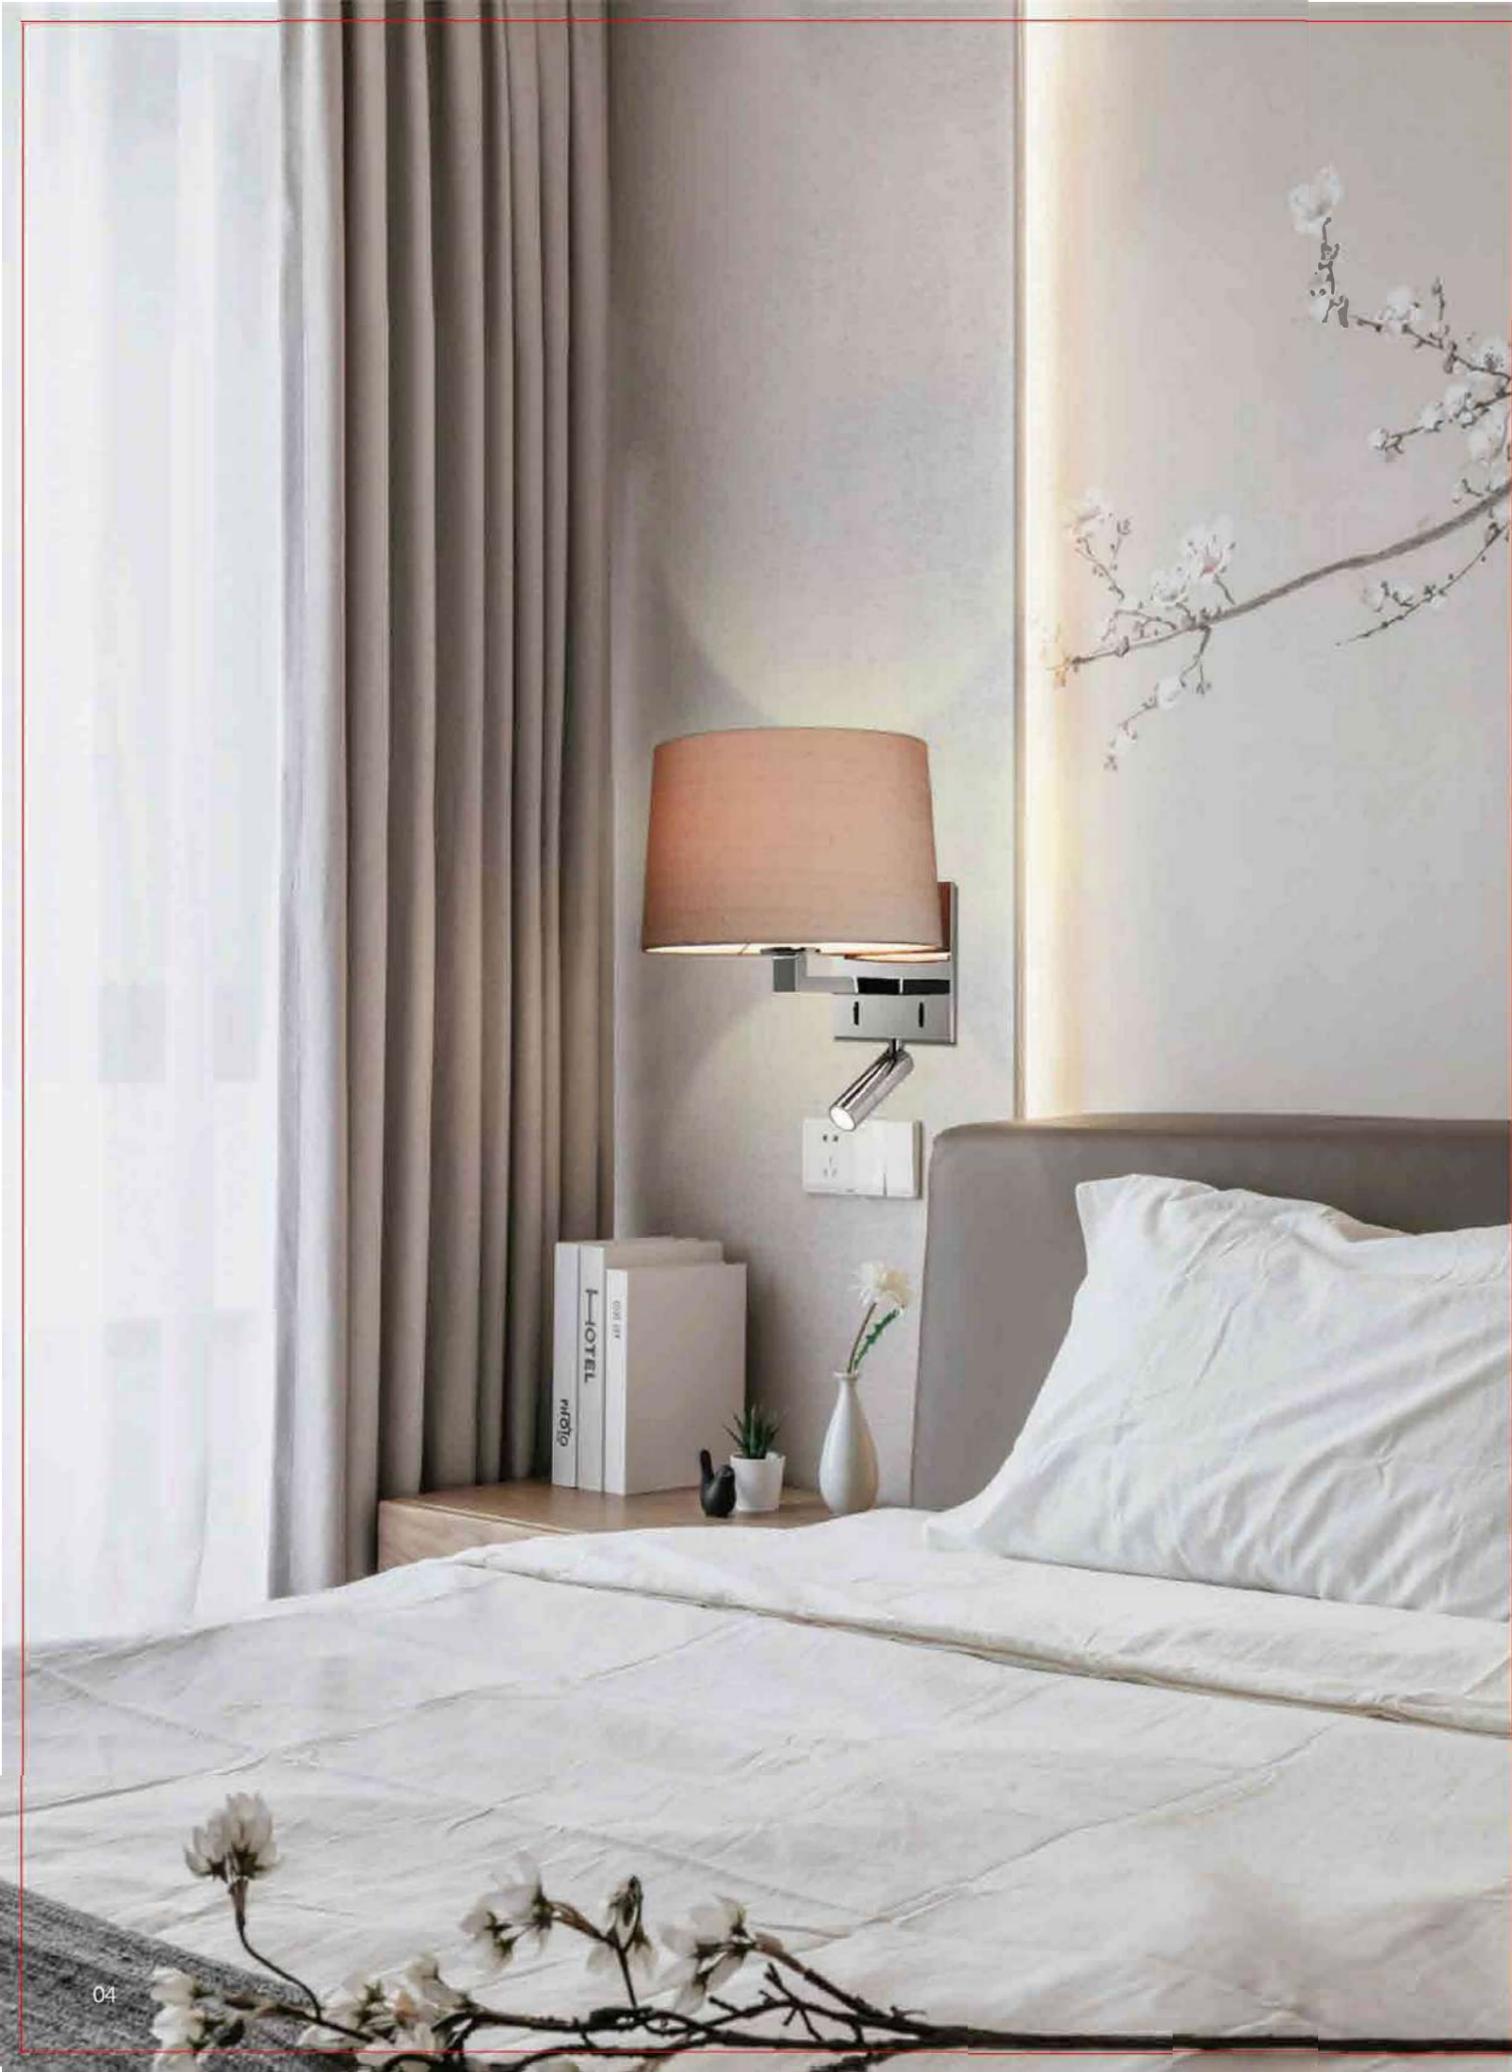

WALL LAMP SERIES



GPSLB10



GPSLB11



GPSLB12



GPSLB13



GPSLB14



GPSLB15



GPSLB16



GPSLB17



GPSLB18



GPSLB19



GPSLB20



GPSLB21



GPSLB22



GPSLB23



GPSLB24



GPSLB25



GPSLB26



GPSLB27

WALL LAMP SERIES



GPSLB28



GPSLB29



GPSLB30



GPSLB31



GPSLB32



GPSLB33



GPSLB34



GPSLB35



GPSLB36



WALL LAMP SERIES




GPSLB37



GPSLB38



GPSLB39

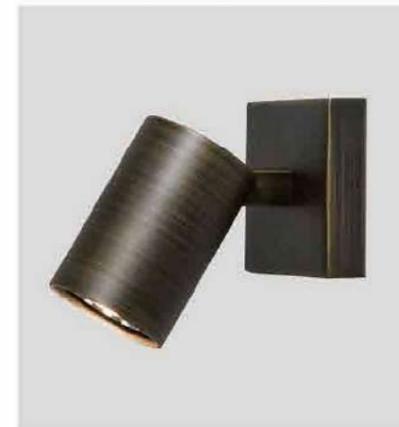

GPSLB40



GPSLB41



GPSLB42



GPSLB43



GPSLB44



GPSLB45



WALL LAMP SERIES



GPSLB46



GPSLB47



GPSLB48



GPSLB49



GPSLB50



GPSLB51



GPSLB52



GPSLB53



GPSLB54



**GPSLB55**



**GPSLB56**



**GPSLB57**



**GPSLB58**



**GPSLB59**



**GPSLB60**



**GPSLB61**



**GPSLB62**



**GPSLB63**

**WALL LAMP SERIES**



**GPSLB64**



**GPSLB65**



**GPSLB66**



**GPSLB67**



**GPSLB68**



**GPSLB69**



**GPSLB70**



**GPSLB71**



**GPSLB72**

**FLOOR  
LAMP**  
*TABLE LAMP*



FLOOR LAMP & TABLE LAMP




**GPSLB73**



**GPSLB74**



**GPSLB75**

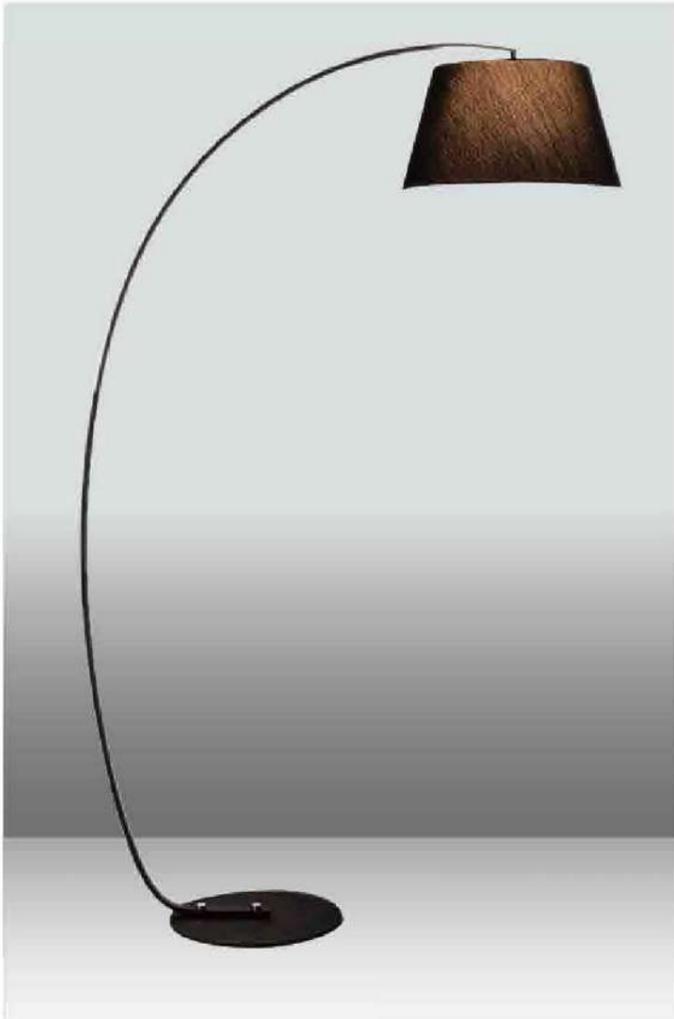

GPSLB76



GPSLB77



GPSLB78



GPSLB79



GPSLB80



GPSLB81




GPSLB82



GPSLB83



GPSLB84

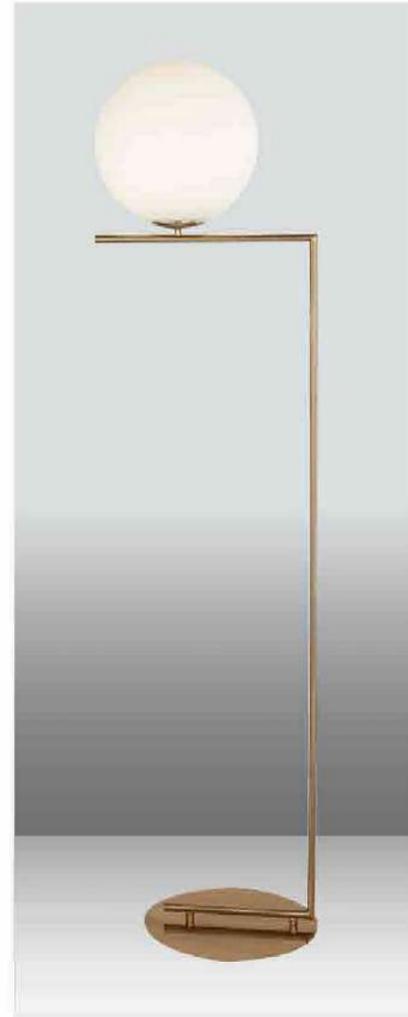

GPSLB85



GPSLB86



GPSLB87



GPSLB88



GPSLB89



GPSLB90



GPSLB91



GPSLB92



GPSLB93



GPSLB94



GPSLB95



GPSLB96




GPSLB97



FLOOR LAMP & TABLE LAMP



GPSLB98

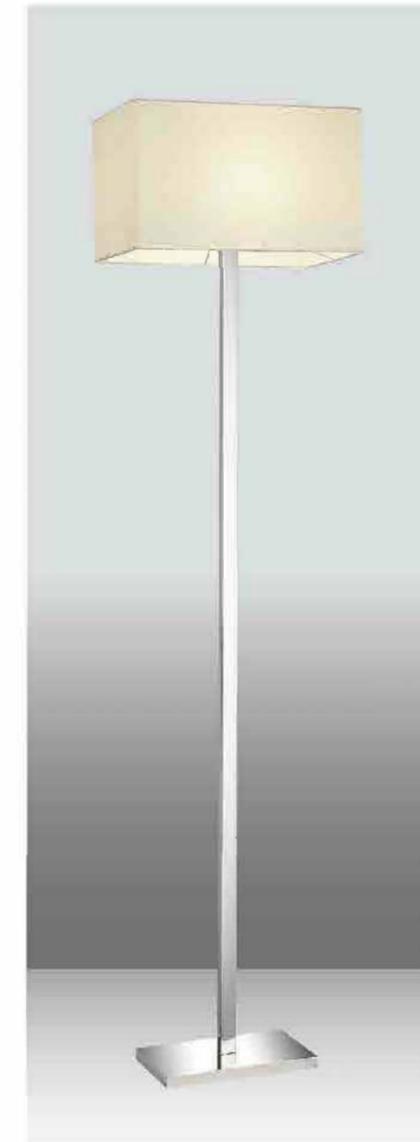

GPSLB99



GPSLC01



**GPSLC02**



**GPSLC03**




**GPSLC04**



**GPSLC05**



**GPSLC06**

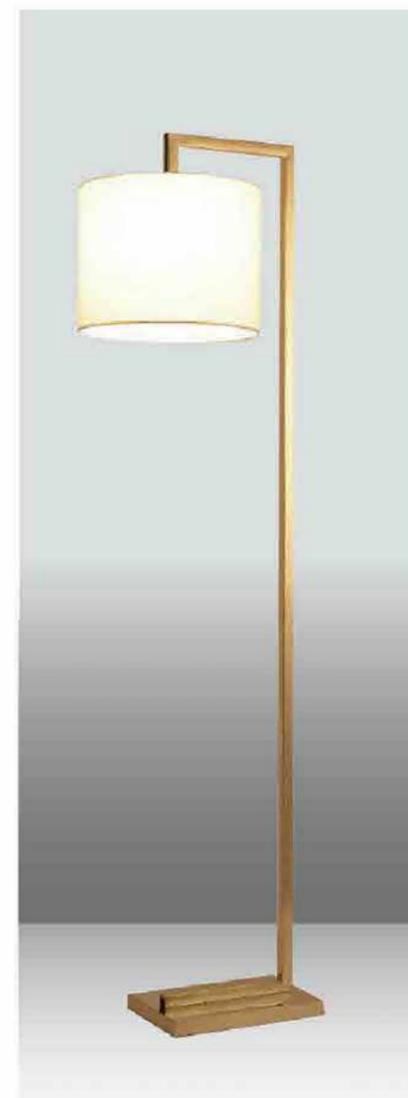

**GPSLC07**



**GPSLC08**



GPSLC09



GPSLC11




GPSLC12



GPSLC10



GPSLC13

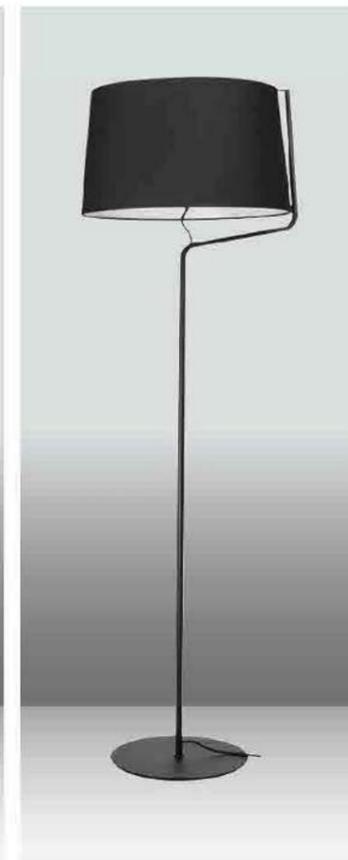

GPSLC14




GPSLC16




GPSLC17



GPSLC15

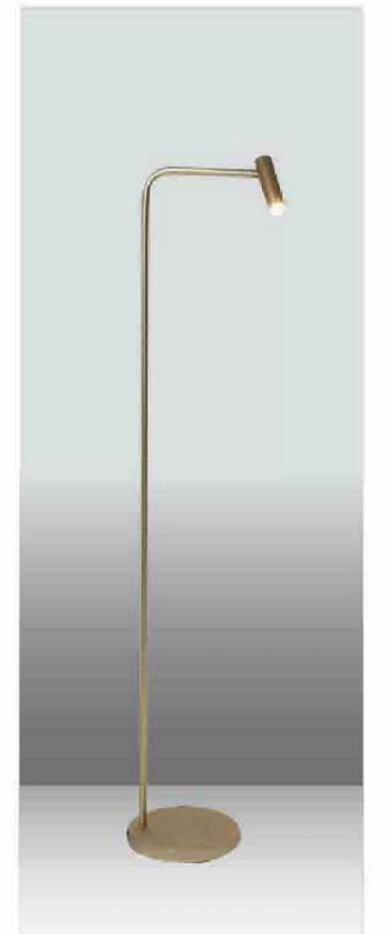

GPSLC18

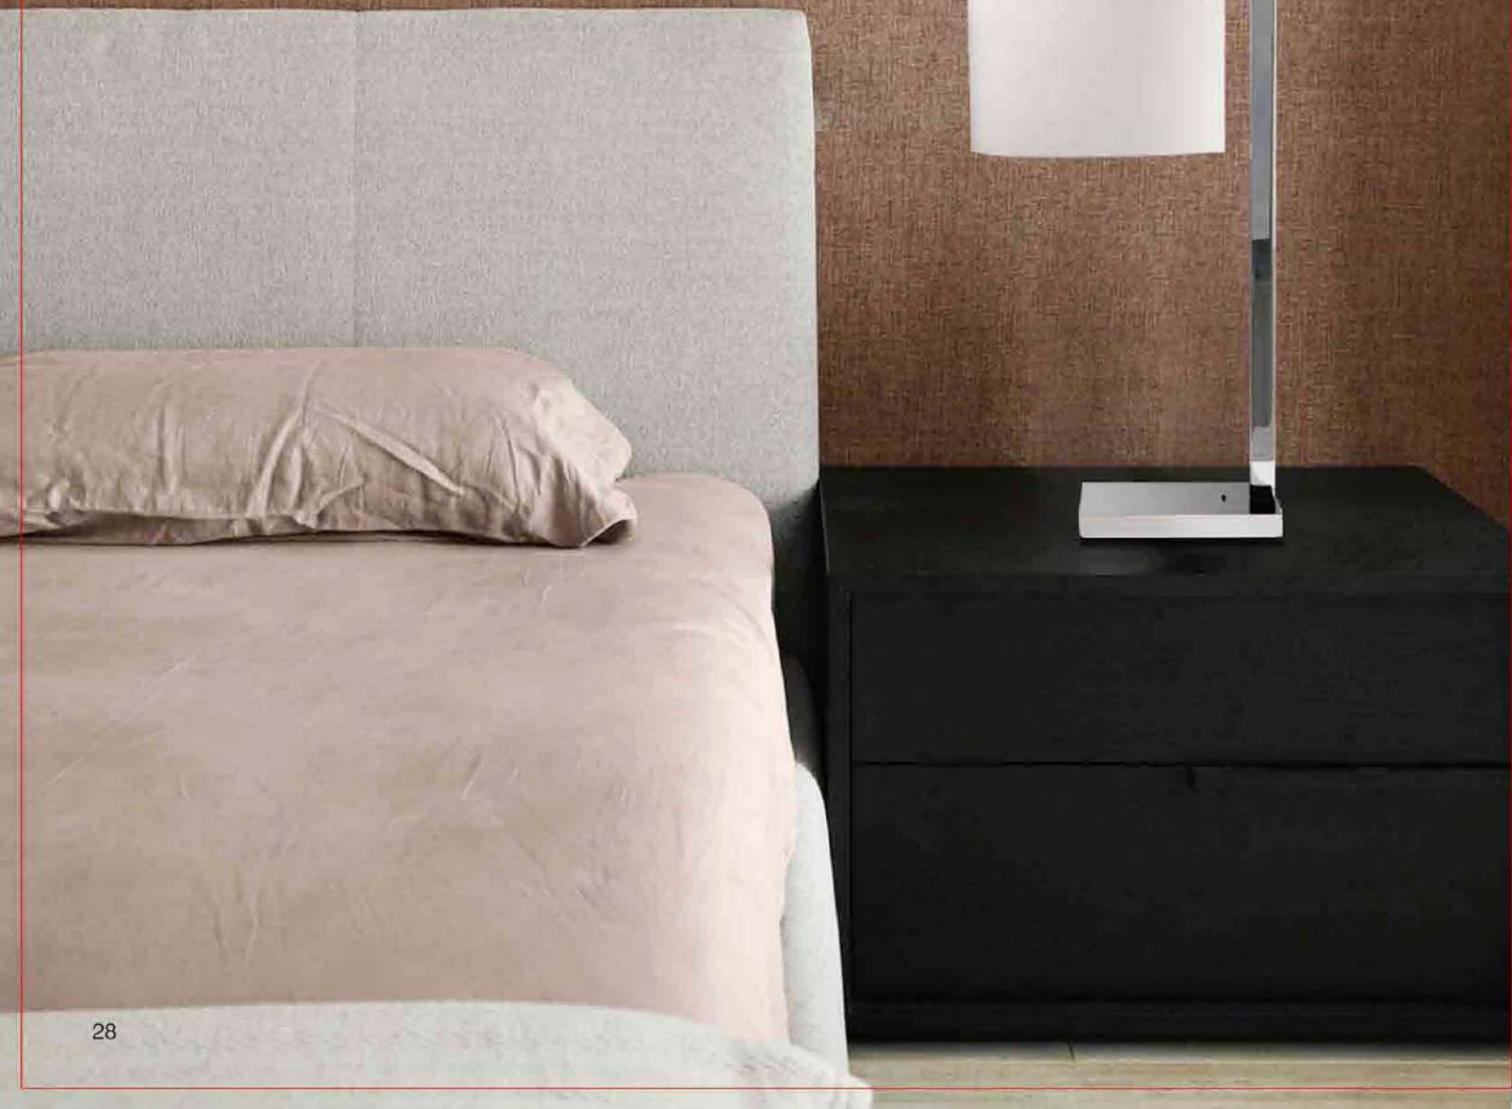

GPSLC19



GPSLC21



GPSLC22



GPSLC20



GPSLC23



## LED PANEL LAMP

## RECESSED PANEL LAMP



### TECHNICAL PARAMETERS

Model	Power	Voltage	CCT	Luminous flux	Material	Life	Surface Size	Cutting Siu
GPSLC243W	3W	AC85-265V	2700-7000K	300LM	Aluminium	>30000H	Φ85mm	Φ70mm
GPSLC244W	4W	AC85-265V	2700-7000K	400LM	Aluminium	>30000H	Φ105mm	Φ95mm
GPSLC246W	6W	AC85-265V	2700-7000K	600LM	Aluminium	>30000H	Φ120mm	Φ105mm
GPSLC249W	9W	AC85-265V	2700-7000K	900LM	Aluminium	>30000H	Φ146mm	Φ135mm
GPSLC2412W	12W	AC85-265V	2700-7000K	1200LM	Aluminium	>30000H	Φ170mm	Φ155mm
GPSLC2415W	15W	AC85-265V	2700-7000K	1500LM	Aluminium	>30000H	Φ200mm	Φ185mm
GPSLC2418W	18W	AC85-265V	2700-7000K	1800LM	Aluminium	>30000H	Φ225mm	Φ205mm
GPSLC2424W	24W	AC85-265V	2700-7000K	2400LM	Aluminium	>30000H	Φ300mm	Φ280mm



### TECHNICAL PARAMETERS

Model	Power	Voltage	CCT	Luminous flux	Material	Life	Surface Size	Cutting Siu
GPSLC253W	3W	AC85-265V	2700-7000K	300LM	Aluminium	>30000H	85*85mm	70*70mm
GPSLC254W	4W	AC85-265V	2700-7000K	400LM	Aluminium	>30000H	105*105mm	95*95mm
GPSLC256W	6W	AC85-265V	2700-7000K	600LM	Aluminium	>30000H	120*120mm	105*105mm
GPSLC259W	9W	AC85-265V	2700-7000K	900LM	Aluminium	>30000H	146*146mm	135*135mm
GPSLC2512W	12W	AC85-265V	2700-7000K	1200LM	Aluminium	>30000H	170*170mm	155*155mm
GPSLC2515W	15W	AC85-265V	2700-7000K	1500LM	Aluminium	>30000H	200*200mm	185*185mm
GPSLC2518W	18W	AC85-265V	2700-7000K	1800LM	Aluminium	>30000H	225*225mm	205*205mm
GPSLC2524W	24W	AC85-265V	2700-7000K	2400LM	Aluminium	>30000H	300*300mm	280*280mm



## SURFACE PANEL LAMP



### TECHNICAL PARAMETERS

Model	Power	Voltage	CCT	Luminous flux	Index	Material	Life	Size
GPSLC266W	6W	AC85-265V	2700-7000K	600LM	CRI>80	Aluminium	>30000H	120*120*40mm
GPSLC2612W	12W	AC85-265V	2700-7000K	1200LM	CRI>80	Aluminium	>30000H	170*170*40mm
GPSLC2618W	18W	AC85-265V	2700-7000K	1800LM	CRI>80	Aluminium	>30000H	225*225*40mm
GPSLC2624W	24W	AC85-265V	2700-7000K	2400LM	CRI>80	Aluminium	>30000H	300*300*40mm




### TECHNICAL PARAMETERS

Model	Power	Voltage	CCT	Luminous flux	Index	Material	Life	Size
GPSLC276W	6W	AC85-265V	2700-7000K	600LM	CRI>80	Aluminium	>30000H	φ120*40mm
GPSLC2712W	12W	AC85-265V	2700-7000K	1200LM	CRI>80	Aluminium	>30000H	φ170*40mm
GPSLC2718W	18W	AC85-265V	2700-7000K	1800LM	CRI>80	Aluminium	>30000H	φ225*40mm
GPSLC2724W	24W	AC85-265V	2700-7000K	2400LM	CRI>80	Aluminium	>30000H	φ300*40mm



# FLAT PANEL LAMP

## FLAT PANEL LAMP

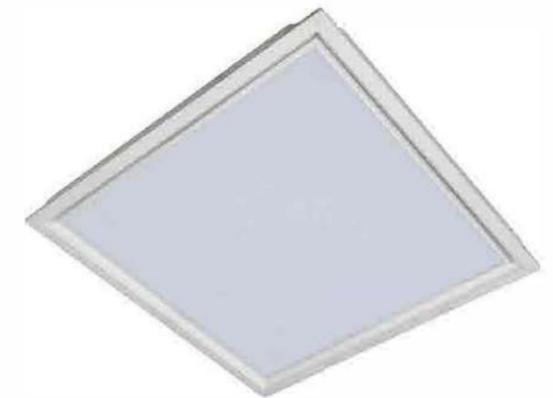

### TECHNICAL PARAMETERS

Model	Power	CCT	Material	Life	Luminous flux	Index	Size
GPSLC28-300*300	18W	2700-7000K	Aluminium	>30000H	1800LM	CRI>80	300*300mm
GPSLC28-300*600	24W	2700-7000K	Aluminium	>30000H	2400LM	CRI>80	300*600mm
GPSLC28-300*1200	40W	2700-7000K	Aluminium	>30000H	4000LM	CRI>80	300*1200mm
GPSLC28-600*600	48W	2700-7000K	Aluminium	>30000H	4800LM	CRI>80	600*600mm
GPSLC28-600*1200	72W	2700-7000K	Aluminium	>30000H	7200LM	CRI>80	600*1200mm

# LED DOWN LIGHT



## LED DOWNLIGHT



### TECHNICAL PARAMETERS

MODEL NO.	WATTS	SIZE (mm)	MATERIAL	CCT	DRIVER	CRI	LUMEN (LM)	BEAM ANGLE
GPSLC29S10	10W	φ 105*H60MM	Aluminium	3000K 4000K 6000K	Top quality Isolation	>80	1000	45°/60°
GPSLC29S15	15W	φ 130*H68MM					1500	
GPSLC29S20	20W	φ 185*H93MM					2000	
GPSLC29S30	30W	φ 219*H98MM					3000	



Positive

Back

Driver

### TECHNICAL PARAMETERS

MODEL NO.	WATTS	SIZE (mm)	MATERIAL	CCT	DRIVER	CRI	LUMEN (LM)	BEAM ANGLE
GPSLC30	7W	φ 90*H66MM	Aluminium	3000K 4000K 6000K	Top quality Isolation	>80	700	15°/24° 38°/60°
	15W	φ 109*H80MM					1500	15°/24° 38°/60°
	20W	φ 138*H112MM					2000	15°/24° 38°/60°
	30W	φ 162*H140MM					3000	45°/60°



Positive


Back

Driver




### TECHNICAL PARAMETERS

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC31	10W	φ 115*H63MM	φ 95MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	1200	PHIL IPS (other brand can choose)	AC90-265V	15°/24° 45°/60°
	15W	φ 137*H74MM	φ 120MM					1800			
	20W	φ 175*H100MM	φ 155MM					2400			
	25W	φ 190*H90MM	φ 168MM					3000			
	30W	φ 230*H125MM	φ 210MM					3600			

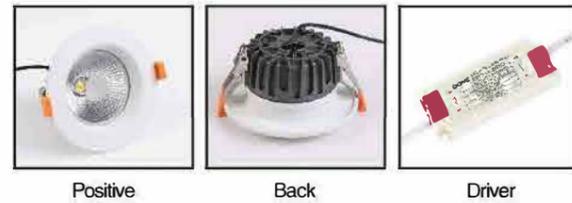

**TECHNICAL PARAMETERS**

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC32	7W	φ 100*H61MM	φ 83MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	840	PHIL IPS (other brand can choose)	AC90-265V	15°/24° 45°/60°
	10W	φ 115*H63MM	φ 95MM					1200			
	15W	φ 137*H74MM	φ 120MM					1800			
	20W	φ 175*H100MM	φ 155MM					2400			
	25W	φ 190*H90MM	φ 168MM					3000			
	30W	φ 230*H125MM	φ 210MM					3600			

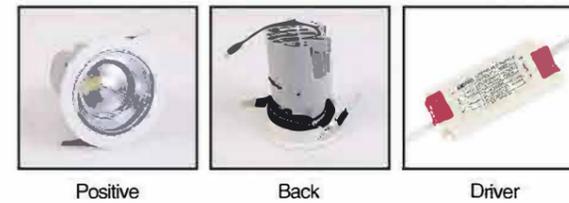

**TECHNICAL PARAMETERS**

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC33	12W	φ 90*H110MM	φ 75MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	1440	PHIL IPS (other brand can choose)	AC90-265V	15°/24° 45°/60°
	20W	φ 110*H140MM	φ 100MM					2400			
	30W	φ 133*H159MM	φ 125MM					3600			



## LED DOWNLIGHT



Positive

Back

Driver

### TECHNICAL PARAMETERS

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC34	7W	φ 85*H95MM	φ 80MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	840	PHILIPS (other brand can choose)	AC90-265V	15°/24° 45°/60°
	15W	φ 115*H140MM	φ 100MM					1800			
	20W	φ 145*H160MM	φ 130MM					2400			
	25W	φ 185*H190MM	φ 160MM					3000			
	35W	φ 205*H230MM	φ 190MM					4200			



**TECHNICAL PARAMETERS**

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC35	15W	φ109*H122MM	φ95MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	1800	PHILIPS (other brand can choose)	AC90-265V	24°/38°
	20W	φ140*H150MM	φ120MM					2400			
	30W	φ161*H153MM	φ140MM					3600			




**TECHNICAL PARAMETERS**

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC36	7W	φ90*H67MM	φ75MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	840	IP65 driver	AC90-265V	25°/40° 60°/90°
	12W	φ108*H72MM	φ95MM					1440			
	15W	φ140*H72MM	φ150MM					1800			
	18W	φ190*H70MM	φ175MM					2160			



#### TECHNICAL PARAMETERS

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC37	7W	φ 85*H70MM	φ 75MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	840	PHILIPS (other brand can choose)	AC90-265V	15°/24° 45°/60°
	12W	φ 100*H100MM	φ 85MM					1440			
	15W	φ 140*H105MM	φ 115MM					1800			
	18W	φ 175*H118MM	φ 150MM					2400			

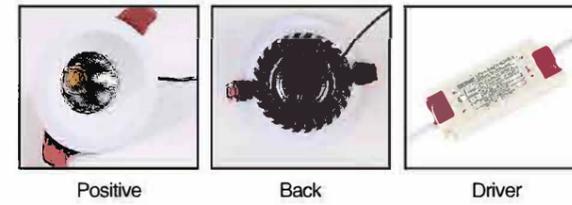

#### TECHNICAL PARAMETERS

MODEL NO.	WATTS	SIZE (mm)	CUT-OUT (mm)	CHIP TYPE	CHIP BRAND	CCT	CRI	LUMEN (LM)	DRIVER	VOLTAGE	BEAM ANGLE
GPSLC38	10W	φ 115*H63MM	φ 95MM	COB	CREE (other brand can choose)	3000K 4000K 5000K 6000K	>80	1200	PHILIPS (other brand can choose)	AC90-265V	15°/24° 45°/60°
	15W	φ 137*H74MM	φ 120MM					1800			
	20W	φ 175*H100MM	φ 155MM					2400			
	25W	φ 190*H90MM	φ 168MM					3000			
	30W	φ 230*H125MM	φ 210MM					3600			

# TRACK LIGHT



## TRACK LIGHT



GPSLC39  
10W/20W/30W



GPSLC40  
10W/20W/30W



GPSLC41  
10W/20W/30W



GPSLC42  
10W/20W/30W



GPSLC43  
10W/20W/30W



GPSLC44  
10W/20W/30W



GPSLC45  
10W/20W/30W



GPSLC46  
10W/20W/30W



GPSLC47  
30W/35W/40W