

The background of the entire image is a warm, orange-toned bokeh effect, with numerous out-of-focus light points creating a soft, glowing texture. Overlaid on this are several curved, translucent light trails that sweep across the frame from the bottom left towards the top right. These trails are composed of many small, bright, circular light sources, giving them a sense of motion and depth. The overall color palette is dominated by warm oranges, yellows, and reds, evoking a cozy and festive atmosphere.

Les nouveau­tés Mars 2024

Introduction

GPS Monaco Group, votre partenaire de confiance pour le sourcing international de produits LED de qualité supérieure.

Notre mission est d'apporter de la lumière à votre monde. En tant que spécialistes de l'industrie LED, nous sommes fiers de vous présenter notre dernière brochure, mettant en vedette une sélection soigneusement choisie de produits innovants.

Notre expertise nous permet de vous offrir une gamme complète de solutions d'éclairage intérieur et extérieur, des ampoules LED écoénergétiques aux luminaires d'avant-garde. De plus, si vous possédez déjà une marque, nos produits sont entièrement personnalisables pour répondre à vos besoins uniques et refléter votre identité !

Découvrez notre sélection exceptionnelle de produits et faites de la lumière le cœur de votre environnement !

Solar LED Light

SOLAR STREET LIGHT WITH ADVERTISING BOX



2 in 1 Lighting+Advertising solar system



High CRI for vivid and true advertising image



Customized outdoor canvas can be replaced easily

► Technical Specification

	Model No.	GPS-35
Lighting System	Solar Panel	18V/80W
	Light Source	20W CREE LED
	Luminous Flux	2800Lm
	Product Size	1155*405*56mm
AD BOX System	Power	20W
	Luminous Flux	2800Lm
	AD BOX Size	900*600*120mm
	Mounting Height	2.5-3m

SOLAR BILLBOARD LIGHT



Multi-layer optical system design



Telescopic structure design



Multi-layer battery protection system design

► Technical Specification

Model No.	Solar Panel	Light Source	Luminous Flux	Product Size
GPS-36	18V/60W	36W LED	5040Lm	1155*480*185mm

Outdoor LED light

Product introduction

Product Name: Solar Flower Light

Specification / Features:

- Solar Panel: Glass monocrystalline silicon 5V/1.5W
- Storage Battery: Lithium 3.7V/2200mAh
- Light Source: Warm white LED*20pcs, RGB LED*20pcs
- Lumen: 100Lm
- CCT: 3000K or 6500K
- Working Time: 6-8h
- Charging Time: 6-7h
- Function: auto light at night when the switch is on, auto off and charge in the daytime. Warm white+RGB+Plant growth light
- Main Material: Lamp support: Paint metal, Lamp: Plastic
- IP Grade: IPX5
- Item Size:
- Crust Color: White/ Silver or Black

Unit Size:

Color Box Size:

Export Carton Size:

QTY/Carton: pcs

20'/40'/40HQ: / /

HS Code: 9405410000

Certificates: to be apply

If product is NEW then you can apply cert. after order confirm but prices must included CE & ROHS

Model/ Item Number :GPS-038

Product Pic



Packing Pic



MOQ: 500


Product Status:

- ☒ Ready For Production
- ☐ New Design Only
- ☐ Under Tooling

Exclusive Markets:

Video Link or website of the product for reference :

Outdoor LED light



GPS-35
GPS-36 with PIR motion sensor

Specifications:
Outdoor Wall Lamp
E27 Max. 60W
Optional dusk to dawn version

Dimensions (W x D x H):
135 x 188 x 330 mm

Materials:
Aluminium body with PMMA diffuser

Source:
AC 220-240V~50/60Hz



Outdoor LED light



GPS-72

Specifications:

Outdoor Wall Lamp
2*80LED 2835 SMD
13W 800lm
Up & down lighting
Can be installed vertically or horizontally
Feeding through wiring base
Optional CCT switch

Dimensions (W x D x H):


400 x 65 x 65 mm

Materials:

Aluminium body with PC diffuser

Source:

AC 100-240V~50/60Hz



Matt Black



Dark Grey



Light Grey




400



65

65

Outdoor LED light



GPS-88
GPS-89 with PIR motion sensor

Specifications:
Outdoor Wall Lamp
96LED 3014SMD
Max.10W Max.600lm

Dimensions (W x D x H):
300 x 142 x 315 mm

Materials:
Aluminium body with PC diffuser

Source:
AC 100-240V~50/60Hz

Outdoor LED light



GPS-11

with PIR motion sensor

Specifications:

Outdoor Wall Lamp
28LED 2835 10W 650lm
Optional CCT switch


Dimensions (W x D x H):
55 x 175 x 200 mm

Materials:

Aluminium body with PC diffuser
With or without wood printing finish

Source:

AC 220-240V~50/60Hz



GPS-24

GPS-25 with PIR motion sensor

Specifications:

Outdoor Wall Lamp with flexible head
2x24LED2835
Optional CCT switch



Dimensions (W x D x H):
140 x 75 x 200 mm

Materials:

Aluminium body with PC diffuser
With or without wood printing finish

Source:

AC 100-240V~50/60Hz



GPS-32

Specifications:

Outdoor Wall Lamp with hybrid function
60 LED 2835SMD Max. 3.6W Max.200lm
Automatic day/night mode switching
Duration time 1 Minute; Detection range: 6-10m/120°

With PIR motion sensor and 2 working-modes

With 7.4V 1500mAh Li-ion Battery
Battery fully recycling life > 500 times
2.5W high efficiency solar panel
Switching to city power automatically when battery no power in rainy days


Dimensions (W x D x H):
140 x 36 x 200 mm

Materials:


Aluminium body with PC diffuser
Wood printing finish

Source:

DC 10V / 2.5W Solar Power
AC 100-240V~50/60Hz



Outdoor LED light




GPS-20
GPS-21 with PIR motion sensor

Specifications:
Outdoor Wall Lamp
28LED 2835 10W 650lm
Optional CCT switch

Dimensions (W x D x H):
55 x 175 x 200 mm

Materials:
Aluminium body with PC diffuser
With or without wood printing finish

Source:
AC 220-240V~50/60Hz

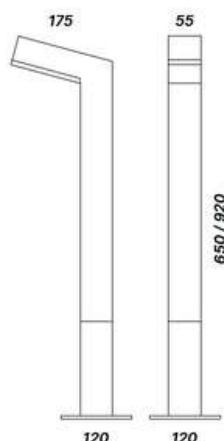


GPS-22 with PIR motion sensor
GPS-23 with PIR motion sensor

Specifications:
Outdoor Bollard Lamp
28LED 2835 10W 650lm
Optional CCT switch


Dimensions (W x D x H):
120 x 215 x 650 mm
120 x 215 x 920 mm

Materials:
Aluminium body with PC diffuser
With or without wood printing finish

Source:
AC 220-240V~50/60Hz



Outdoor LED light



GPS-51

Specifications:

Outdoor Wall Lamp
1LED 10W COB
10W 650lm
With wood printed or painted frame
Feeding through wiring base
Optional CCT switch



Dimensions (W x D x H):
180 x 200 x 60 mm

Materials:

Aluminium body with PC diffuser
Inside frame with wood printing or painted

Source:

AC 100-240V~50/60Hz



GPS-66

GPS-67 with PIR motion sensor

Specifications:

Outdoor Wall Lamp
60LED 2835 SMD
10W 600lm
Feeding through wiring base
Optional CCT switch

Dimensions (W x D x H):
120 x 113 x 260 mm

Materials:

Aluminium body with PC diffuser

Source:

AC 100-240V~50/60Hz



GPS-86

GPS-87 with PIR motion sensor

Specifications:

Outdoor Wall Lamp
96LED 3014SMD
Max.10W Max.600lm


Dimensions (W x D x H):
300 x 90 x 383 mm

Materials:


Aluminium body with PC diffuser

Source:

AC 100-240V~50/60Hz



Outdoor LED light



GPS-102
GPS-103 with microwave sensor


Specifications:
Outdoor Wall/Ceiling Lamp
96LED 2835 SMD
Max.20W Max.1200lm

Dimensions (W x D x H):
300 x 300 x 48 mm


Materials:
Aluminium body with PC diffuser

Source:
AC 100-240V~50/60Hz
AC 200-240V~50/60Hz

Outdoor LED light

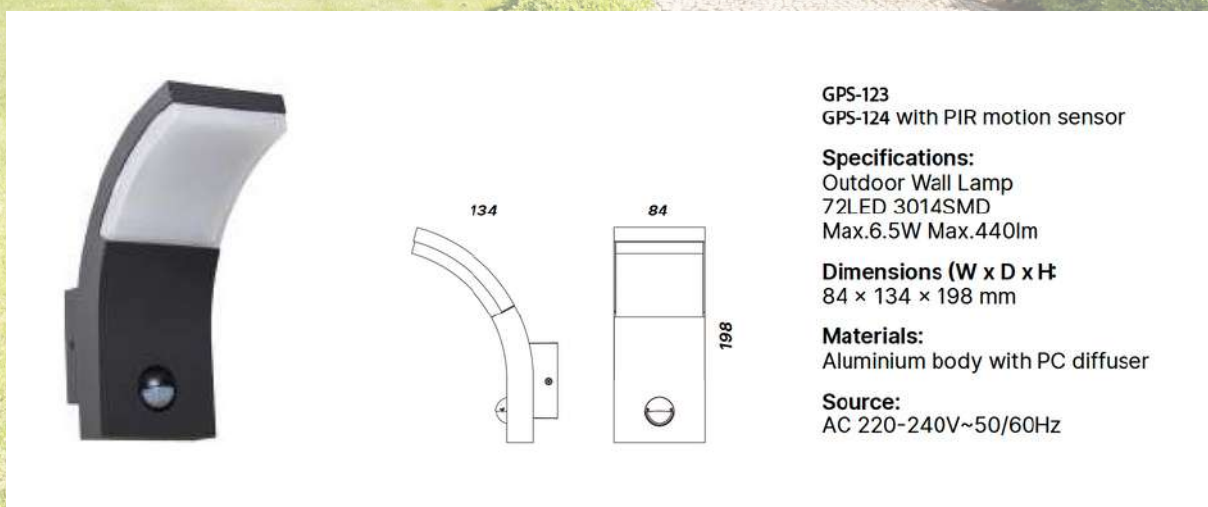

Outdoor LED light



GPS-139
GPS-140 with PIR motion sensor

Specifications:
Outdoor Wall Lamp
48LED 2835SMD
Max.10W Max.650lm

Dimensions (W x D x H)
170 x 117 x 150 mm

Materials:
Aluminium body with PC diffuser

Source:
AC 100-240V~50/60Hz

