

**Les
nouveau**tés**
Juin 2024**

Introduction

GPS Monaco Group, votre partenaire de confiance pour le sourcing international de produits LED de qualité supérieure.

Notre mission est d'apporter de la lumière à votre monde. En tant que spécialistes de l'industrie LED, nous sommes fiers de vous présenter notre dernière brochure, mettant en vedette une sélection soigneusement choisie de produits innovants.


Notre expertise nous permet de vous offrir une gamme complète de solutions d'éclairage intérieur et extérieur, des ampoules LED écoénergétiques aux luminaires d'avant-garde. De plus, si vous possédez déjà une marque, nos produits sont entièrement personnalisables pour répondre à vos besoins uniques et refléter votre identité !

Découvrez notre sélection exceptionnelle de produits et faites de la lumière le cœur de votre environnement !

LED Solar Wall Light




Function Introduction

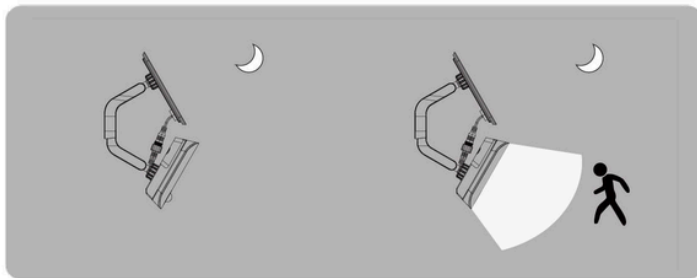

MODE 1

Dusk to Dawn
0% Standby Lumen,
100% turn on 25s when Triggered.

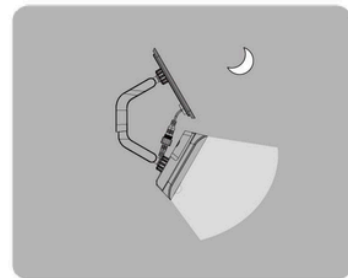


MODE 3

Dusk to Dawn
40% Standby Lumen.




MODE 2

Dusk to Dawn
10% Standby Lumen,
100% turn on 25s when Triggered.

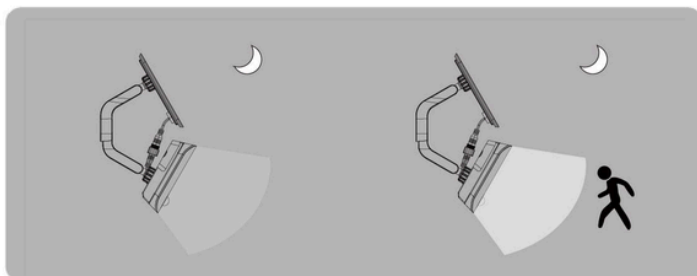

MODE SOS

Dusk to Dawn
Emergency button.





• Detachable Battery




• Multi-angle adjustment




• Color Available White/Black



LED Floor Lamp

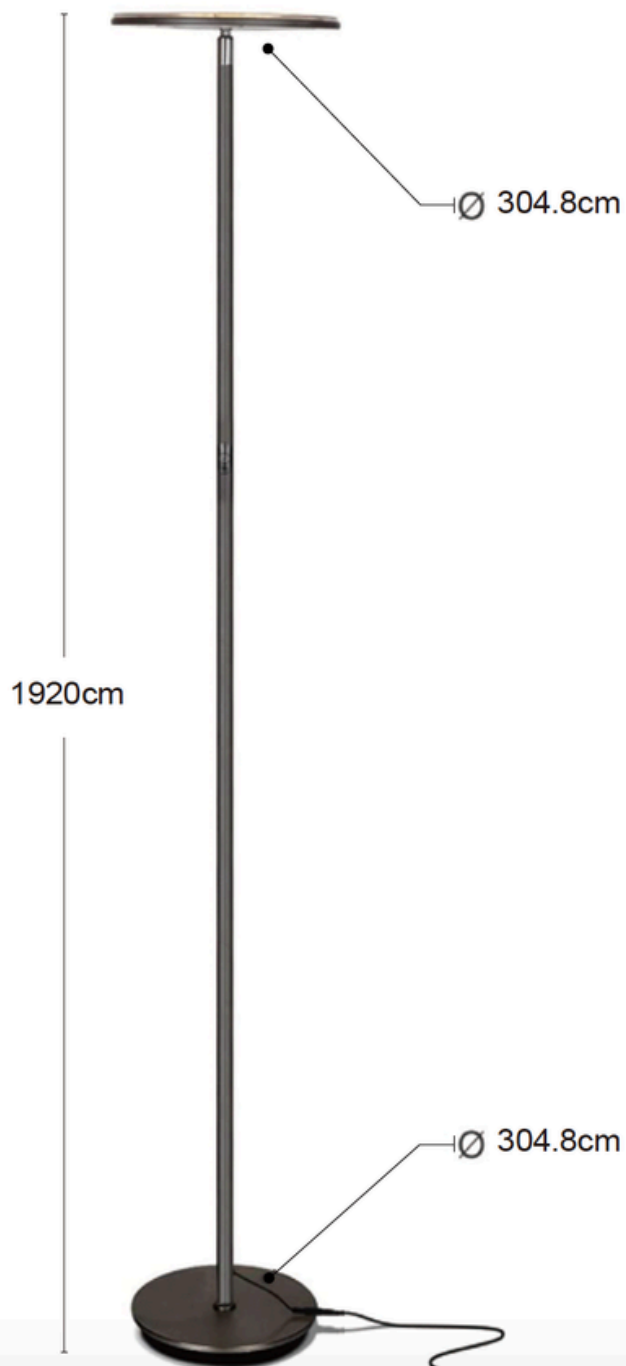

Without remote control

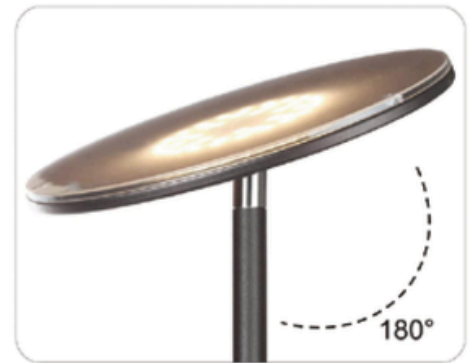

Flexible Angle Light
(Can be adjusted by 180°)




Weighted Safety Base



BALLET FLOOR



Model	Power Lumen	Color T.	Color Option	Dimension	Switch type	Inner box size (inch)	Weight(Kg)
	3W / 1100LM	3000K	BW/C/B	150cm x 29cm	High-Med-Low-Off 4-way foot switch	61.02 * 13.19 * 12.40	9.23

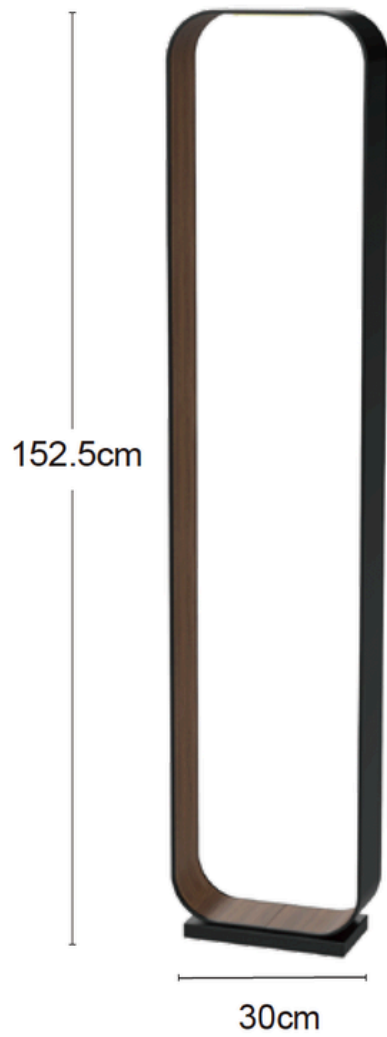

PARADISE GATE LIGHTS

Model	Power Lumen	Color T.	Color Option	Dimension	Switch type	Inner box size (inch)	Weight(Kg)
	36W / 1100LM	3000K	Black	152.5cm x 33cm	High-Med-Low-Off 4-way foot switch	64.4 * 10.43 * 15.95	9Kg

LED Wall Light

Features:


- Surface mount
- UV resistant
- Anti-corrosion

Voltage	CRI	Material	IP	
220-240V~50Hz	≥80	PC+ABS & PC diffuser	IP65, CLASSII	
	LED	SMD		
Item No	LED	QTY	Lumen	Wattage
2835	48	600	8W	
2835	48	600	8W	

Available colors:

Black White Grey Dark Grey

CE EMC LVD RoHS

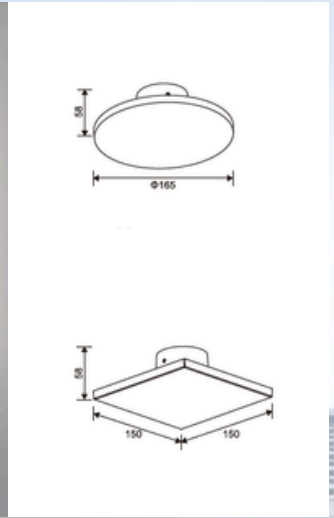

Features:


- Surface mount
- UV resistant
- Anti-corrosion

Voltage	CRI	Material	IP	
220-240V~50Hz	≥80	PC+ABS & PC diffuser	IP65, CLASSII	
	LED	SMD		
Item No	LED	QTY	Lumen	Wattage
2835	2*24	400	2*4W	






Available colors:

Black White Grey Dark Grey

CE EMC LVD RoHS



LED Wall Light

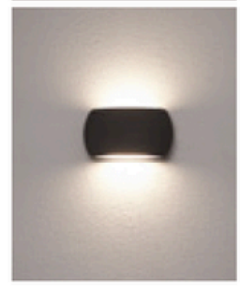







DESCRIPTION




Aluminium die-cast body, PC diffuser

Aluminium body surface electrostatic plastic-coating treatment

Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

Model	Material	Voltage	Wattage	Chip	More Info
	Aluminium & PC/Glass	220V-240V	2x3W	SMD	IP65  
	Aluminium & Glass	220V-240V	2x3W	SMD	IP65  
	Aluminium & PC	220V-240V	4x3W	SMD	IP65  

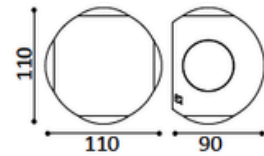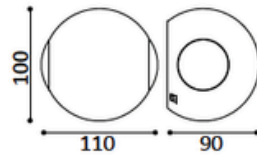





DESCRIPTION





Aluminium die-cast body, PC diffuser

Aluminium body surface electrostatic plastic-coating treatment

Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

Model	Material	Voltage	Wattage	Chip	More Info
	Aluminium & PC	220V-240V	2x3W	COB	IP65  
	Aluminium & PC	220V-240V	4x3W	COB	IP65  

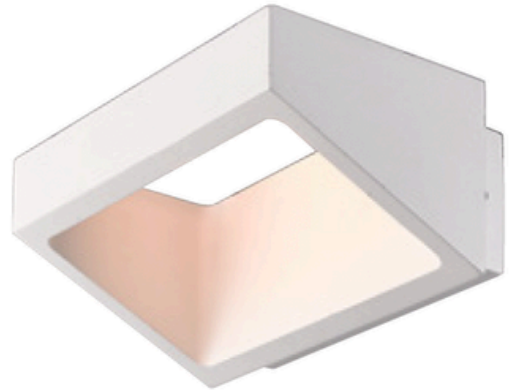

DESCRIPTION





Aluminium die-cast body, glass diffuser

High strength toughened glass lampshade

Aluminium body surface electrostatic plastic-coating treatment

Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

Model	Material	Voltage	Wattage	Chip	More Info
	Aluminium & Glass	220V-240V	6W	COB	IP65  
	Aluminium & Glass	220V-240V	6W	SMD	IP65  
	Aluminium & Glass	220V-240V	6W	SMD	IP65 