

The background of the entire page is a close-up, low-angle shot of several strands of LED lights. The lights are primarily blue, with some yellow lights interspersed. The strands are draped diagonally across the frame, creating a sense of depth and movement. The lighting is soft and focused on the individual LEDs, which are slightly out of focus in the background, creating a bokeh effect.

**Les
nouveauités
Août 2024**

Introduction

GPS Monaco Group, votre partenaire de confiance pour le sourcing international de produits LED de qualité supérieure.

Notre mission est d'apporter de la lumière à votre monde. En tant que spécialistes de l'industrie LED, nous sommes fiers de vous présenter notre dernière brochure, mettant en vedette une sélection soigneusement choisie de produits innovants.

Notre expertise nous permet de vous offrir une gamme complète de solutions d'éclairage intérieur et extérieur, des ampoules LED écoénergétiques aux luminaires d'avant-garde. De plus, si vous possédez déjà une marque, nos produits sont entièrement personnalisables pour répondre à vos besoins uniques et refléter votre identité !

Découvrez notre sélection exceptionnelle de produits et faites de la lumière le cœur de votre environnement !

Outdoor Wall Light


OUTDOOR DECORATIVE WALL LIGHT COLLECTION



Specifications

Voltage: 100V-240V
No. of LED: 30 PCS
Type of LED: 2835 SMD LED
Total Wattage: 13W
IP Rating: IP65
PF > 0.9


Surge: 2500V
CRI > 80
flicker free
Color Temp.: 2700K-6500K
Material: Alu.+PC
Size: 133*96*250mm



Specifications

Voltage: 100V-240V
No. of LED: 60 PCS
Type of LED: 2835 SMD LED
Total Wattage: 13W
IP Rating: IP65
PF > 0.9


Surge: 2500V
CRI > 80
flicker free
Color Temp.: 2700K-6500K
Material: Alu.+PC
Size: 133*96*250mm



Specifications

Voltage: 100V-240V
No. of LED: 12 PCS
Type of LED: 2835 SMD LED
Total Wattage: 13W
IP Rating: IP65
PF > 0.8

Surge: 2500V
CRI > 80
flicker free
Color Temp.: 2700K-6500K
Material: Alu.+PC
Size: 148*90*216mm



Specifications

Voltage: 100V-240V
No. of LED: 2 PCS
Type of LED: 7070 SMD LED
5050 SMD LED
Total Wattage: 11/20W
IP Rating: IP65
PF > 0.9

Surge: 2500V
CRI > 80
flicker free
Color Temp.: 2700K-6500K
Material: Alu.+PC
Size: 260*80*40mm
400*125*60mm





8W 650LM

Specifications

Voltage: 100-240V
Head adjustable 300°
Material: Alu.+PC
IP44
Size: 90*202*153mm



6.5W 500LM

Specifications

Voltage: 100-240V
Head adjustable 300°
Material: Alu.+Glass
IP44
Size: 105*253*172mm



6W 560LM

Specifications


Voltage: 100-240V
Material: Alu.+PC
IP54
Size: 90*160*106mm



2x6W 1120LM

Specifications

Voltage: 100-240V
Material: Alu.+Glass
IP54
Size: 90*280*106mm

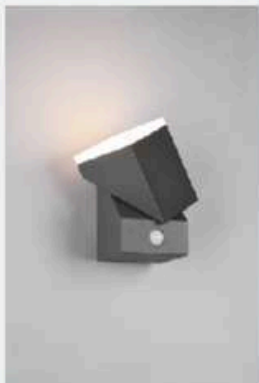

6W 560LM

Specifications

Voltage: 100-240V
Material: Alu.+PC
IP54
Size: 90*160*106mm



2x6W 1120LM


Specifications

Voltage: 100-240V
Material: Alu.+Glass
IP54
Size: 90*280*106mm






6W 719LM
Specifications
 Voltage: 100-240V
 Angle: 350°
 IP65
 Size: 200*110*58mm



12W 1517LM
Specifications
 Voltage: 100-240V
 Angle: 350°
 IP65
 Size: 200*115*110mm



6W 888LM
Specifications
 Voltage: 100-240V
 Angle: 120°
 IP54
 Size: 275*112*82mm
 270*112*82mm

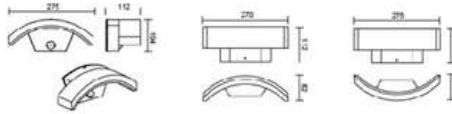

Specifications
 Voltage: 100-240V
 Aluminium die-casting body
 Tempered glass diffuser
 GU10 MAX. 1x35W
 IP54
 Size: 68*92*80mm



Specifications
 Voltage: 100-240V
 Aluminium die-casting body
 Tempered glass diffuser
 GU10 MAX. 2x35W
 IP54
 Size: 68*92*150mm



Specifications
 Voltage: 100-240V
 Aluminium die-casting body
 Tempered glass diffuser
 GU10 MAX. 1x35W
 IP54
 Size: 68*92*80mm



Specifications
 Voltage: 100-240V
 Aluminium die-casting body
 Tempered glass diffuser
 GU10 MAX. 2x35W
 IP54
 Size: 68*92*150mm



Specifications
 Voltage: 100-240V
 Aluminium die-casting body
 Tempered glass diffuser
 GU10 MAX. 1x35W
 IP54
 Size: 68*110*162mm



Specifications
 Voltage: 100-240V
 Aluminium die-casting body
 Tempered glass diffuser
 GU10 MAX. 2x35W
 IP54
 Size: 68*110*216mm

Waterproof Light

series LED Waterproof Lamp




Model Code	Power (W)	Input Voltage (V)	CRI	Efficacy (lm/w)	CCT (K)	Dimension (mm) L*W*H
	10					
	15					600*85.5*69.5
	18					
	20	220-240				
	25	/	80	120/140/160/180	2700-6500	1200*85.5*69.5
	36	100-277				
	30					
	40					1500*85.5*69.5
	50					

series LED Waterproof Lamp



Model Code	Power (W)	Input Voltage (V)	CRI	Efficacy (lm/w)	CCT (K)	Dimension (mm) L*W*H
	18					600*72*62
	36	220-240 / 100-277	80	100/120/140/160	2700-6500	1200*72*62
	48					1500*72*62

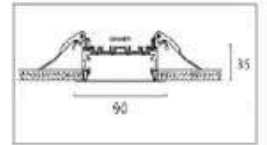

Color


Details & Structure:




Specifications:

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
	L616*W90*H35mm	L605*W80*H60mm	20W	AC100-277V AC200-240V	90lm/W	3000K	White
	L1200*W90*H35mm	L1195*W80*H60mm	40W			4000K	Silver
	L1806*W90*H35mm	L1800*W80*H60mm	60W			6000K	Black
	L2400*W90*H35mm	L2390*W80*H60mm	80W				





Color



Details & Structure:











Specifications:

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
	L618*W70*H35mm	L605*W60*H60mm	20W	AC100-277V AC200-241V	90lm/W	3000K 4000K 6000K	White Silver Black
	L1200*W70*H35mm	L1195*W60*H60mm	40W				
	L1806*W70*H35mm	L1800*W60*H60mm	60W				
	L2400*W70*H35mm	L2390*W60*H60mm	80W				





Recessed connecting

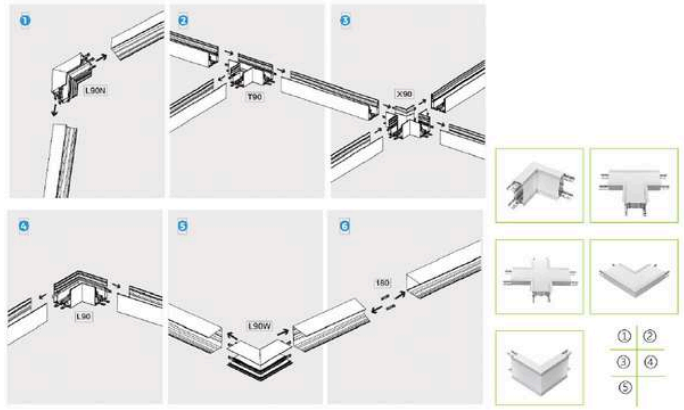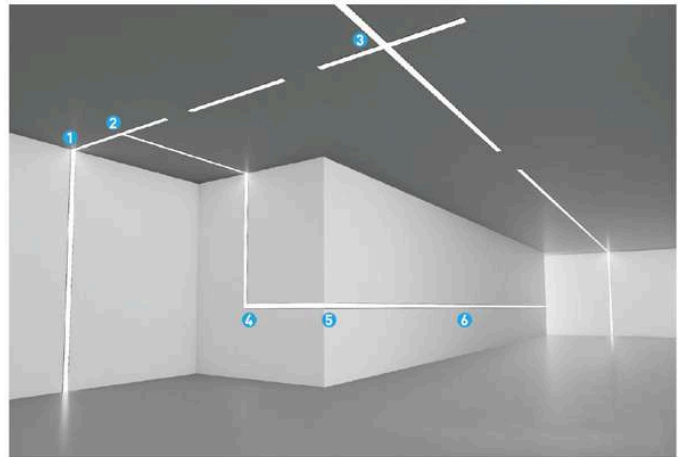

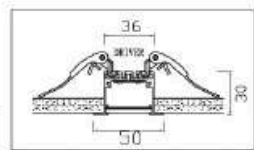


Details & Structure:

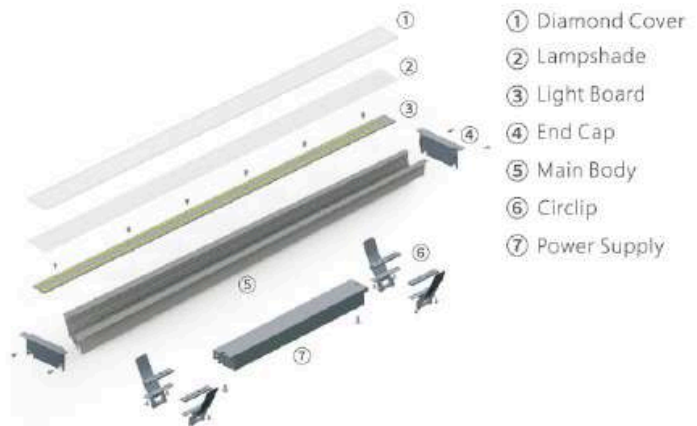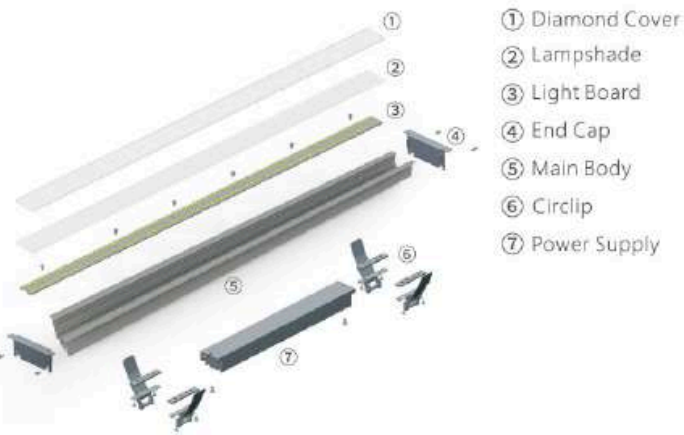


Specifications:

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
	L615*W50*H55mm	L600*W35*H55mm	20W	AC100-277V AC200-240V	95lm/W	3000K 4000K 6000K	White Silver Black
	L1205*W50*H55mm	L1195*W35*H55mm	40W				
	L1800*W50*H55mm	L1790*W35*H55mm	60W				
	L2395*W50*H55mm	L2385*W35*H55mm	80W				


Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
	L656*W50*H55mm	L645*W35*H55mm	20W	AC100-277V AC200-240V	120lm/W	3000K 4000K 6000K	White Silver Black
	L1292*W50*H55mm	L1280*W35*H55mm	40W				
	L1928*W50*H55mm	L1913*W35*H55mm	60W				
	L2564*W50*H55mm	L2550*W35*H55mm	80W				





Color   



Color   

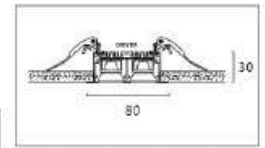

Details & Structure:

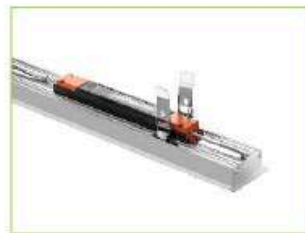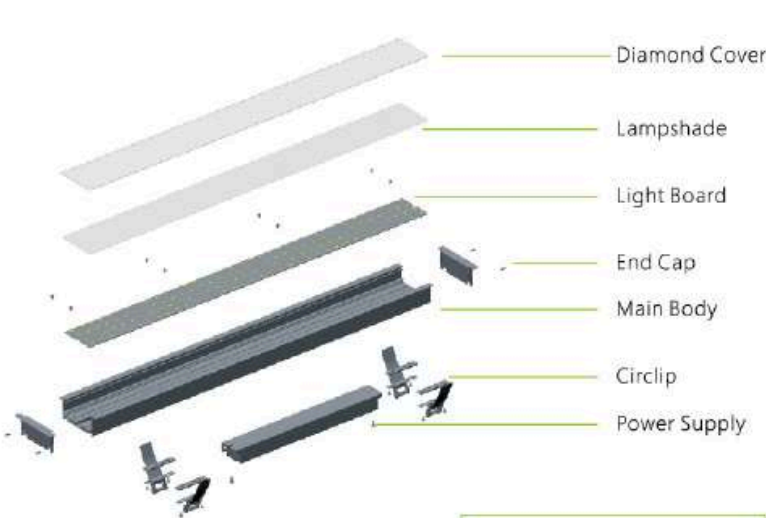

Specifications:

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
	L616*W80*H30mm	L605*W70*H55mm	20W	AC100-277V AC200-240V	95lm/W	3000K 4000K 6000K	White Silver Black
	L1200*W80*H30mm	L1195*W70*H55mm	40W				
	L1806*W80*H30mm	L1800*W70*H55mm	60W				
	L2400*W80*H30mm	L2390*W70*H55mm	80W				


Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
	L650*W80*H30mm	L645*W70*H55mm	20W	AC100-277V AC200-240V	120lm/W	3000K 4000K 6000K	White Silver Black
	L1288*W80*H30mm	L1283*W70*H55mm	40W				
	L1924*W80*H30mm	L1920*W70*H55mm	60W				
	L2560*W80*H30mm	L2550*W70*H55mm	80W				

RGBW Neon Strip Light

- 16*16mm, 13*17mm, 12*20mm, 12*25mm, 20*20mm etc
- DMX512 addressable white, RGB, RGBW color available
- Silicone Extrusion or Silicone Tube Waterproof
- 3years warranty
- flat or arc surface



Modular LED Flood Light

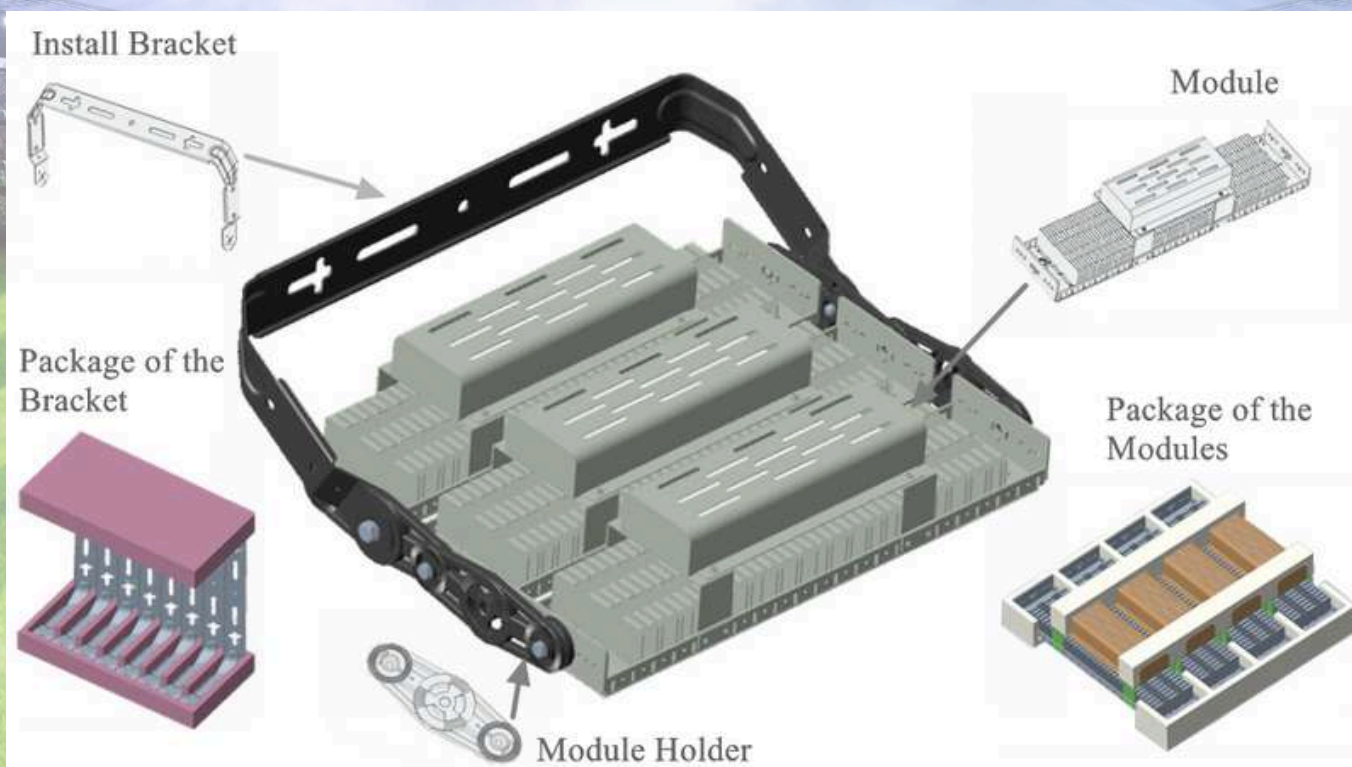

Parameters : 170lm/w - 10/20/40/60/90/150° - IP66

LED Undercabinet Light




1) For your kitchen, work room & bookcase...

- LED module : 15.5W/2350lm
- ErP Energy Class **D**

2) Structure

- 2x France or Germany sockets, Max. 3500W
- **PD port, USB-A+USB-C, Max. 15W**
- ON/OFF switch for LED part

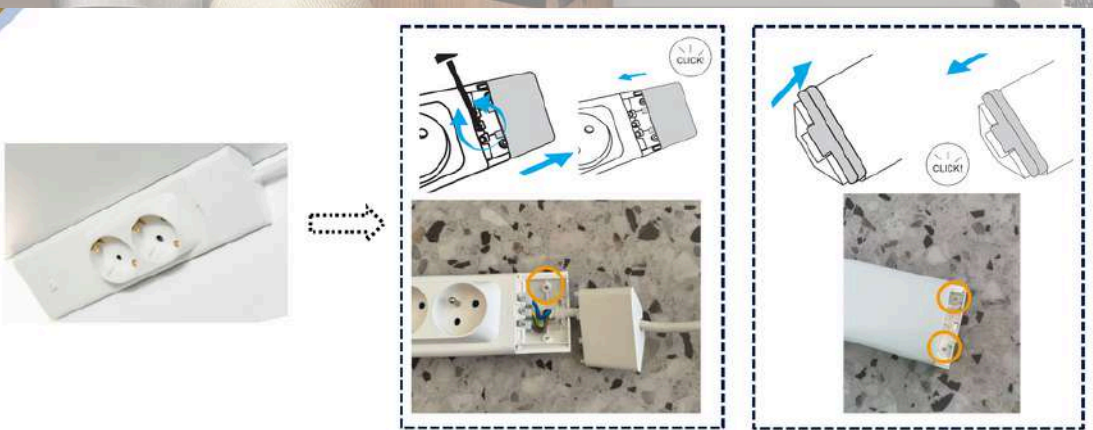

3) Make it more easily for you to install and remove

- Front to fix the lamp with screws & connect power cable



A - Only 2*Sockets

B - Only PD port

C - Only lamp

D - 2 different lengths of LED part

Number	1	2	3	4
Photo				
Fuction	1. 2*Germany or France socket Max.3500W; 2. PD port(USB-A + USB-C) 3. ON/OFF switch for LED	1. 2*Germany or France socket Max.3500W 2. ON/OFF switch for LED	1. PD port(USB-A + USB-C) 2. ON/OFF switch for LED	1. Only ON/OFF switch for LED
Input	220-240V~ 50Hz,Class I	220-240V~ 50Hz,Class I	220-240V~ 50Hz,Class I	220-240V~ 50Hz,Class I
Connection	With terminal box only, no power cable	With terminal box only, no power cable	With terminal box only, no power cable	With terminal box only, no power cable
Size	603.5x64x26mm	603.5x64x26mm	528.5x64x26mm	528.5x64x26mm
Package	Carton: 65.5x36x33.5cm/20pcs 20GP Container: 7089pcs	Carton: 65.5x36x33.5cm/20pcs 20GP Container: 7089pcs	Carton:58x36x33.5cm/20pcs 20GP Container: 8005pcs	Carton:58x36x33.5cm/20pcs 20GP Container: 8005pcs

