



GPS Group
MONACO

**Les
nouveau**tés**
Septembre 2024**

Introduction

GPS Monaco Group, votre partenaire de confiance pour le sourcing international de produits LED de qualité supérieure.

Notre mission est d'apporter de la lumière à votre monde. En tant que spécialistes de l'industrie LED, nous sommes fiers de vous présenter notre dernière brochure, mettant en vedette une sélection soigneusement choisie de produits innovants.

Notre expertise nous permet de vous offrir une gamme complète de solutions d'éclairage intérieur et extérieur, des ampoules LED écoénergétiques aux luminaires d'avant-garde. De plus, si vous possédez déjà une marque, nos produits sont entièrement personnalisables pour répondre à vos besoins uniques et refléter votre identité !

Découvrez notre sélection exceptionnelle de produits et faites de la lumière le cœur de votre environnement !

LED Matrix light






Type	LED Matrix Light
Application	Stage,wedding,culb,bar
Lighting solutions service	Lighting and circuitry design, auto CAD layout, Project Installation
Input Voltage(V)	AC100V-240V 50Hz-60Hz
Product Weight (kg)	9 KG
Emitting Color	RGB
Light Source	LED
Support Dimmer	Yes
Lifespan (hours)	50000
Working Time (hours)	50000
Working Temperature(°C)	-75
IP Rating	IP20
Power	120W
Control	DMX 512/master-slave/auto/sound Active

Magnetic LED light

5MM MAGNETIC LIGHTING SYSTEM

SLIM AS CHOPSTICKS !


EXCLUSIVE INNOVATIVE SAFETY
BUTTON !

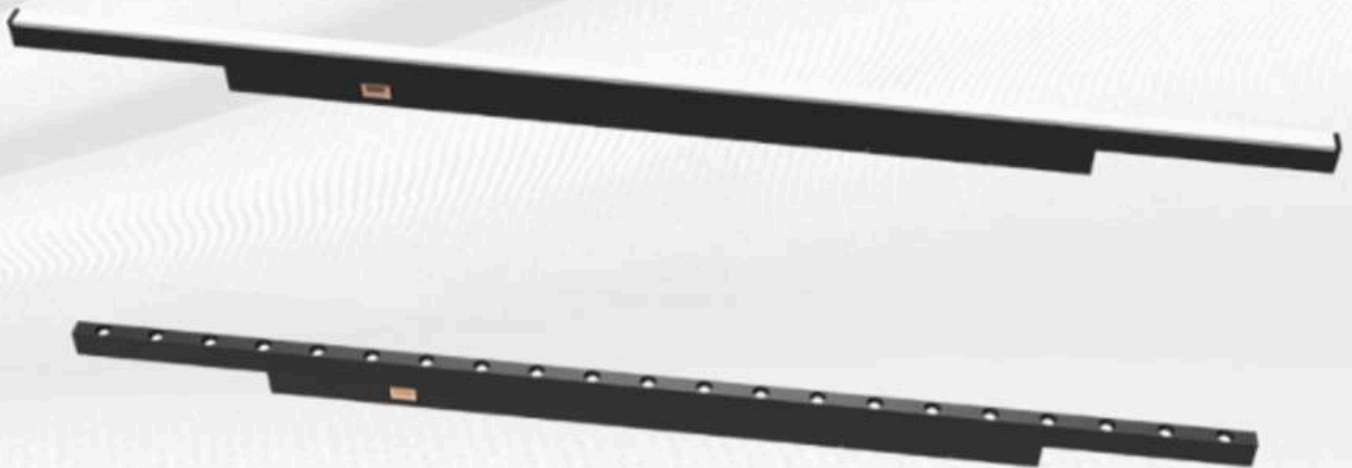

Tri proof LED light



COLOR

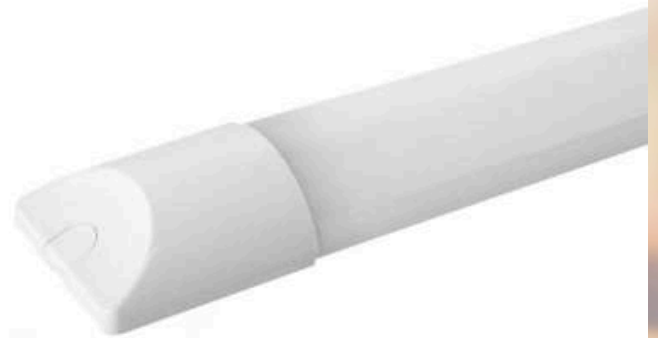

Advantage

- Wider wattage at 20W/30W/40W/50W.
- DDB solution with voltage 170-260V.
- Screw and hook installation options.
- Luminous efficacy @100lm/w with 25000hrs lifespan.
- Excellent surge protection @ 2.5KV.

Item No.	Real Watts ±10%	Luminous Efficacy	CRI (Ra)	Beam Angle	Power Factor (PF)	Volts	Lamp Size (mm)
	20W	100lm/W	>80	110°	>0.9	170-260V	600*62.5*27.5
	30W	100lm/W	>80	110°	>0.9	170-260V	900*62.5*27.5
	40W	100lm/W	>80	110°	>0.9	170-260V	1200*62.5*27.5
	50W	100lm/W	>80	110°	>0.9	170-260V	1500*62.5*27.5



LED Ceiling light



Color Temperature(CCT)	3000K,4000K,5000K
Input Voltage(V)	120-277V,220V
Lamp Luminous Efficiency(lm/w)	110
Lamp Luminous Flux(lm)	6600
Warranty(Year)	5-Year
Working Temperature(°C)	-80
Color Rendering Index(Ra)	80
Certification	RoHS, CE
Lifespan (hours)	50000
Working Time (hours)	50000
Packing Dimension	customization
power	30w/45w/60w
PF	0.95
Material	PC <u>unbreakable material</u>


LED rectangle recessed stair light





Product name	LED Step Light
Lighting solutions service	Lighting and circuitry design, DIALux evo layout, LitePro DLX layout, Agi32 layout, auto CAD layout, Onsite metering, Project Installation
Color Temperature(CCT)	2700-6000K
Input Voltage(V)	DC 24V
Color Rendering Index(Ra)	90
Luminous Efficacy(lm/w)	100
Lifespan (hours)	30000
Working Time (hours)	30000
Emitting Color	White
Material	Die-cast Aluminum
Power	3W/6W
IP Grade	IP65 Waterproof
Beam angle	15/30/36/50degree
Installation	Surface Wall Mounted
Certificate	CE ROHS EMC

Garden solar LED light

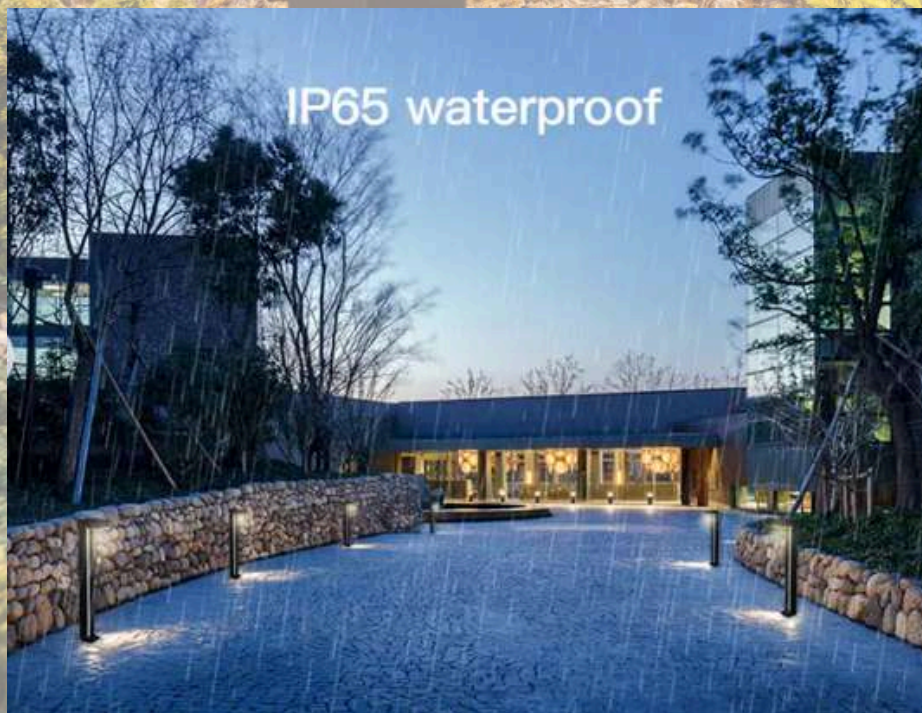




IP Rating	IP65
Power Supply	Solar
Color Temperature(CCT)	3000K
Beam Angle(°)	70*140
CRI (Ra>)	70
Input Voltage(V)	4.5V
Lamp Luminous Efficiency(lm/w)	190
Lamp Luminous Flux(lm)	100
Working Lifetime(Hour)	50000
Working Temperature(°C)	-46
Support Dimmer	Yes
Lifespan (hours)	50000
Battery	Rechargeable Lio-on Battery
Lighting Time	8 Nights +
Material	Aluminum ally + Glass
Solar panel	Monocrystalline Silicon
Certification	CE,ROHS,FCC,BV,BSCI,
Solar Charging Time	7-9 hous by bright sunlight

LED High bay Light



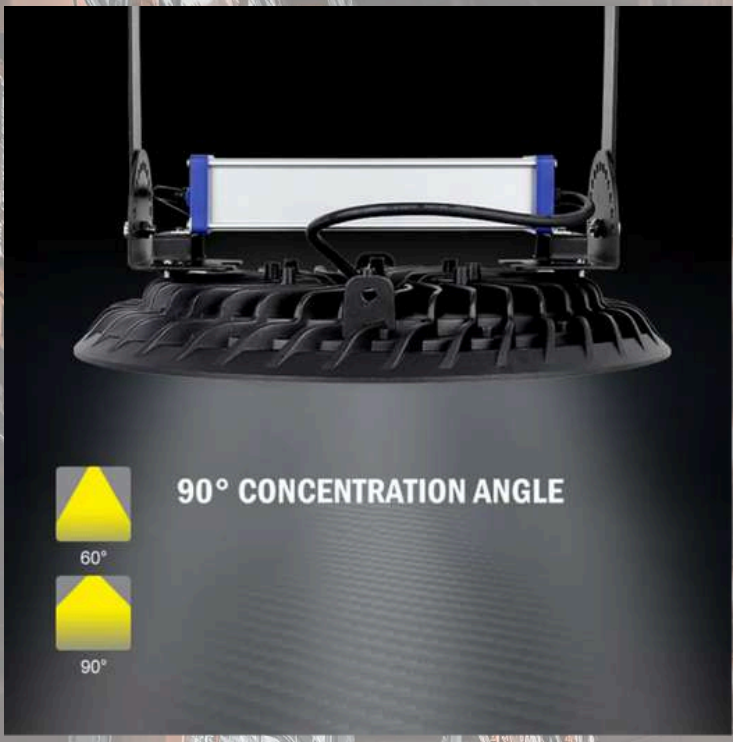

90° CONCENTRATION ANGLE



UFO High Bay light



IP65 WATERPROOF

The unit construction of lamp adopt waterproof and dustproof design, it can meet the indoor and outdoor needs and other different application areas.





Lamp Luminous Efficiency(lm/w)	115
Application	Warehouse, Office, Residential, Other
Color Temperature(CCT)	6000K (Daylight Alert)
Color Rendering Index(Ra)	95
Lifespan (hours)	50000
Working Time (hours)	50000
Product Weight (kg)	5
<u>Wattage</u>	100W/200W
Lamp Luminous Flux(lm)	12000
Working Lifetime(Hour)	50000
Beam Angle(°)	30/60/90
Input Voltage(V)	AC 85-265V
CRI (Ra>)	80
IP Rating	IP54
Support Dimmer	No

LED Street light



Color Temperature(CCT)	3000-6000k
Warranty(Year)	5-Year
IP Rating	IP66
Beam Angle(°)	T2/T3/T4/30°/60°/90°
CRI (Ra>)	70
Input Voltage(V)	AC200-240V/100-277V
Lamp Luminous Efficiency(lm/w)	130
Lamp Luminous Flux(lm)	23400
Working Temperature(°C)	-105
Color Rendering Index(Ra)	70
Certification	PSE, RoHS, CCC, CE, LVD, VDE, SASO, <u>Reach</u> , <u>Saa</u>
Support Dimmer	Yes
Lifespan (hours)	50000
Working Time (hours)	50000
Product Weight (kg)	7.5
Power	180W
Beam angle	30/60/90/T2/T3/T4
Anti-surge	10KV
Color	Grey
IP Grade	IP66

Tri-proof LED light

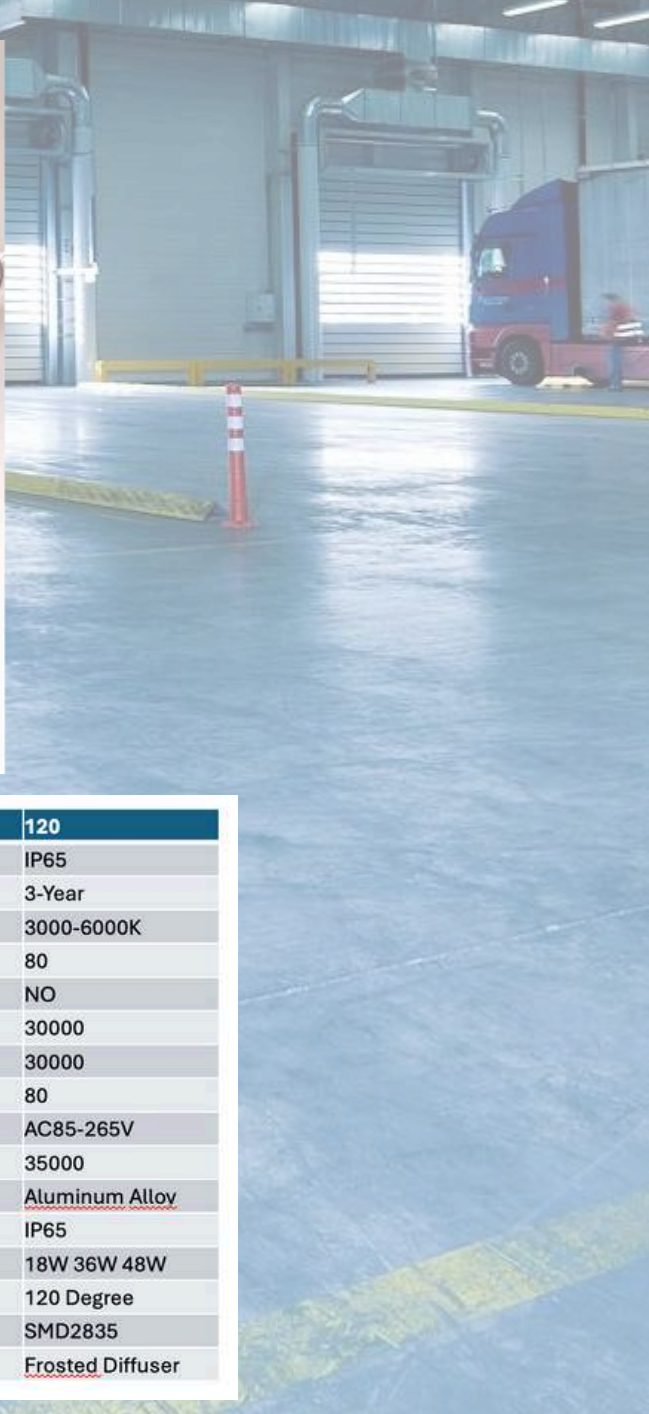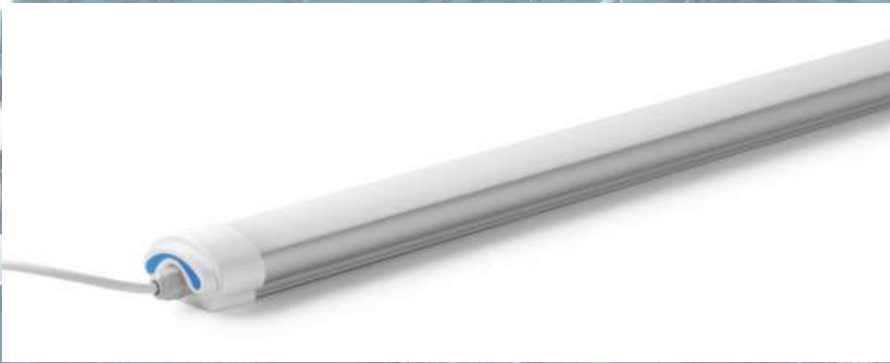

Lamp Luminous Efficiency(lm/w)	120
IP Rating	IP65
Warranty(Year)	3-Year
Color Temperature(CCT)	3000-6000K
Color Rendering Index(Ra)	80
Support Dimmer	NO
Lifespan (hours)	30000
Working Time (hours)	30000
CRI (Ra>)	80
Input Voltage(V)	AC85-265V
Working Lifetime(Hour)	35000
Lamp Body Material	<u>Aluminum Alloy</u>
IP Rating	IP65
Power	18W 36W 48W
Beam angle	120 Degree
LED Chip	SMD2835
Diffuser	<u>Frosted Diffuser</u>

Work LED light



USB Charging & Output



lights modes/4 lights modes
(Short press),
Stepless brightness adjust
(Long press)

White/Warm/Nature/SOS

TYPE-C

USB



