

Les Nouveautés LED



Octobre 2024

YOUR SMART **G**LOBAL **P**ROUREMENT & **S**OURCING PARTNER


Avec plus de 27 ans d'expérience, GPS Monaco Group est votre Allié de Confiance en matière de Sourcing et d'Approvisionnement International.

NOS AVANTAGES



Excellence à Votre Service

Nous nous efforçons constamment de dépasser les attentes de nos clients en leur offrant des solutions et des services de premier ordre.



Approche Sur Mesure

Notre approche centrée sur le client vous fournit des solutions sur mesure pour vos besoins uniques.



Présence Internationale

Depuis nos bureaux à Monaco, France, Suisse, Asie et Arabie Saoudite, nous sécurisons vos achats de l'usine à vos entrepôts.

Plus de
60
Millions
de Produits Importés.

+1700
Usines Auditées.





Dimmable & 3-CCT LED Track Light

Triac 1%-100% dimmable



3-CCT Optional by Switch

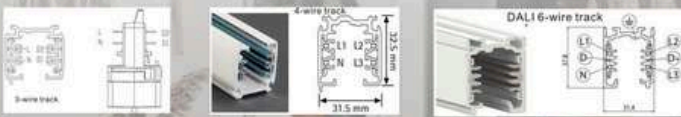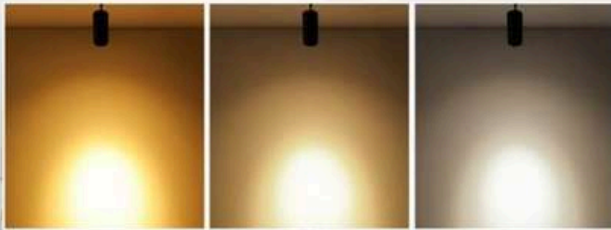

Excellent Heat Dissipation

Aluminum heatsink to make lower energy consumption and guarantee LED lifespan



High Quality Aluminium Material

Good corrosion resistance and durability

Different Zoom Adjustable Viewing Angle

Special design ring, can change the view



Zoomable Dimmable Light Source

Various Optional Adaptor

Provide 2/3/4 wire adaptor match different track system to the global market



1. Flicker Free Triac Dimmable/0-10V/DALI/Dim to Warm/3CCT 3000K-6000K Color Change by Switch
2. Zoomable 15-60 degree adjustable
3. Wattage 10W-40W, CRI90+/CRI95+
4. Compatible with Juno/Halo/Global Track System
5. 2/3/4 Wires or 1/2/3 Phase
6. Certification: CE, LVD, EMC, RoHS, New ERP





CRI > 80 3000K CUSTOM

Dimension (mm): 1195*35*50mm
Power:35W
CCT:4000K/custom
CRI: > 90

Dimension (mm): 1538*45*45mm
Power:45W
CCT:4000K/custom
CRI: > 90





CRI > 80 3000K CUSTOM

Dimension (mm): 1187*17.5*50MM
Power:40W
Dimming:on/off, Trial/0-10V/DALI
CRI: > 90
Beam Angle: 24/36°

Dimension (mm): 1776*17.5*50MM
Power:60W
Dimming:on/off, Trial/0-10V/DALI
CRI: > 90
Beam Angle: 24/36°





CRI > 80 3000K CUSTOM

Dimension (mm): 601*50mm
Power:40W
Dimming:on/off, Trial/0-10V/DALI
CRI: > 90
Beam Angle: 24/36°

Dimension (mm): 801*50mm
Power:60W
Dimming:on/off, Trial/0-10V/DALI
CRI: > 90
Beam Angle: 24/36°




Specifications
 Voltage: AC220V-240V;
 Beam: 120°
 Ra: >80
 PF: >0.9
 Material: PC
 Certificates: CE ROHS ERP2.0



LED Downlight. CCT		
Wattage	Lumen	Product Size
5W +2W	500LM	φ90*85
8W +2W	800LM	φ115*105
12W +2W	1200LM	φ140*110

Specifications
 Voltage: AC220V-240V;
 Beam: 120°
 Ra: >80
 PF: >0.9
 Material: PC
 Certificates: CE ROHS ERP2.0



LED Downlight. CCT		
Wattage	Lumen	Product Size
5W +2W	500LM	φ90*85
8W +2W	800LM	φ115*105
12W +2W	1200LM	φ140*110

60cm 90cm 120cm 150cm 200cm

Dimension (mm)	Power	CCT	CRI
600*50*40mm	12W	3000K/custom	> 80
900*50*40mm	18W	3000K/custom	> 80
1200*50*40mm	24W	3000K/custom	> 80
1500*50*40mm	30W	3000K/custom	> 80
2000*50*40mm	40W	3000K/custom	> 80
3000*50*40mm	50W	3000K/custom	> 80

60cm 90cm 120cm 150cm 200cm

Dimension (mm)	Power	CCT	CRI
900*35*60mm	8W	3000K/custom	> 80
1200*35*60mm	10W	3000K/custom	> 80
1500*35*60mm	12W	3000K/custom	> 80
2000*35*60mm	15W	3000K/custom	> 80


Free to adjust the direction, use more freely and more convenient

955mm

608mm


Dimension (mm)	Power	CCT	CRI
608*55*70mm	6W	3000K/custom	> 80
955*55*70mm	9W	3000K/custom	> 80



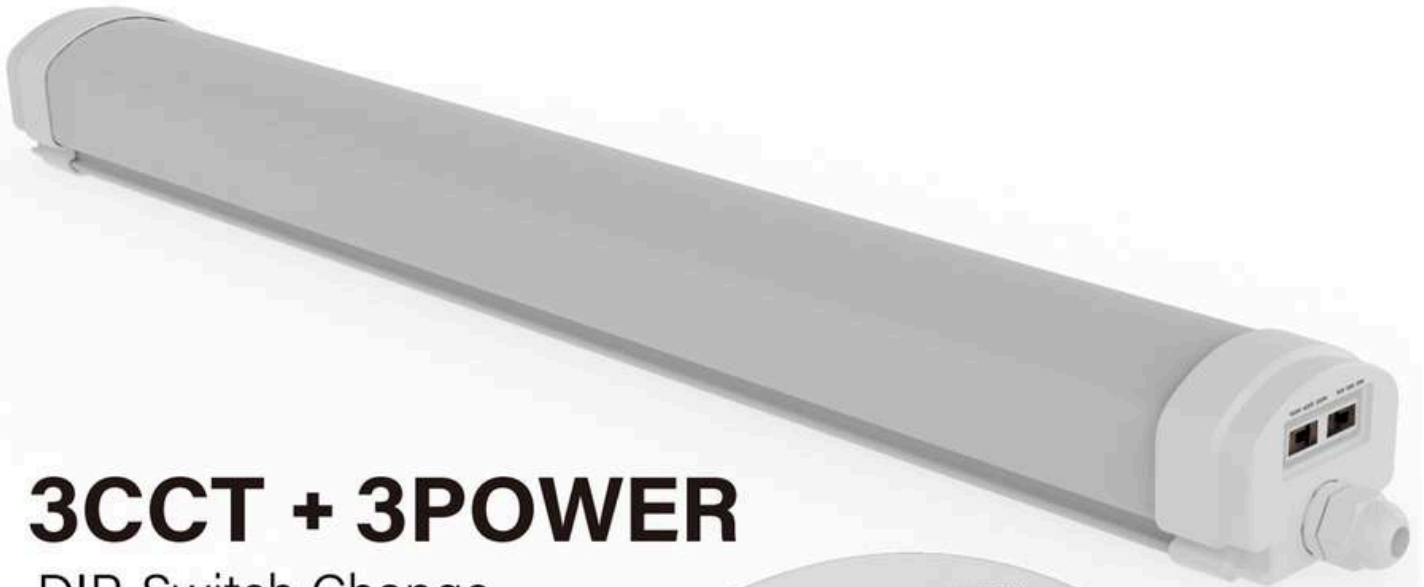

3CCT + 3POWER

DIP-Switch Change

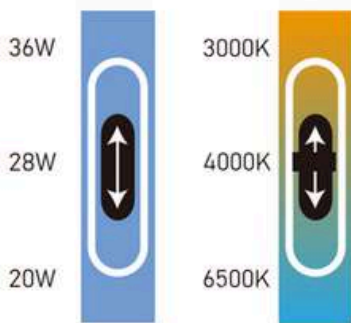



Patrick Bogaerts
Fondateur, CEO

Contact

Téléphone : +33 6 07 93 79 98

Email : Patrick@GPSMonacoGroup.com

Site Web : <https://GPSMonacoGroup.com>