

# Les Nouveautés LED



**Novembre 2024**

## YOUR SMART **G**LOBAL **P**ROUREMENT & **S**OURCING PARTNER

Avec plus de 27 ans d'expérience, GPS Monaco Group est votre Allié de Confiance en matière de Sourcing et d'Approvisionnement International.

### NOS AVANTAGES



#### **Excellence à Votre Service**

Nous nous efforçons constamment de dépasser les attentes de nos clients en leur offrant des solutions et des services de premier ordre.



#### **Approche Sur Mesure**

Notre approche centrée sur le client vous fournit des solutions sur mesure pour vos besoins uniques.



#### **Présence Internationale**

Depuis nos bureaux à Monaco, France, Suisse, Asie et Arabie Saoudite, nous sécurisons vos achats de l'usine à vos entrepôts.

Plus de  
**60**  
**Millions**  
de Produits Importés.

**+1700**  
Usines Auditées.

### Flood light with Speaker

**2000 Lumens**

- 7.4V/4000mAh Li-Ion
- 4.5 hrs
- 50 lumens
- 1-2.4 hrs
- AC Charger 220V-1A
- Power Bank 5V-1A
- IP-34
- IP67

High quality dual wireless speaker, enjoy your working time

180° Adjustable Handle, Removable Battery pack, Power Bank Torch

01

### Handheld work light

**600 Lumens**

- 3.7V/2200mAh Li-Ion
- 4 hrs
- 2.5-3.5 hrs
- Micro USB 5V-1A
- IP65
- IK07

**COLOR MATCHING CRI ≥ 95**

360° Swivel Hook, Indicator

02

### Pocket work light

**320 Lumens**

- 3.7V/1400mAh Li-Poly
- 2.5 hrs
- 60 lumens
- 2.5-5 hrs
- Micro USB 5V-1A
- IP20
- IK07

1W Torch, Hook & Clip

07

### Handheld work light

**600 Lumens**

- 3.7V/2600mAh Li-Ion
- 4 hrs
- 100 lumens
- 2-10 hrs
- Micro USB 5V-1A
- IP65
- IK07

180° Bendable, 180° Swivel

08

## Rechargeable Wing-Light



## AC 100V/230V Slimline



### PRODUCT FEATURES

- High Lm/W output offers high performance
- Plug & Play to be free from complex of installation
- IP65 rated floodlight, for full weatherproof protection
- Ideal for residential outdoor security lighting including driveways, gardens, patios, entrance and walkways
- Compact & Portable, The led work light is lightweight and space-saving. Soft and comfortable grip enables you to easily lift the work light.



### PRODUCT SPECIFICATION

| Power | Lumen  | Input Voltage         | Material | Material      | Color temperature | Certificates    |
|-------|--------|-----------------------|----------|---------------|-------------------|-----------------|
| 10W   | 1000lm | AC100V/AC240V 50/60HZ | ABS      | 164x103x151mm | 3000K/6500K       | CE-LVD/EMC/ROHS |
| 20W   | 2000lm | AC100V/AC240V 50/60HZ | ABS      | 194x103x176mm | 3000K/6500K       | CE-LVD/EMC/ROHS |
| 30W   | 3000lm | AC100V/AC240V 50/60HZ | ABS      | 244x103x225mm | 3000K/6500K       | CE-LVD/EMC/ROHS |
| 50W   | 5000lm | AC100V/AC240V 50/60HZ | ABS      | 304x133x265mm | 3000K/6500K       | CE-LVD/EMC/ROHS |



|                                |  |
|--------------------------------|--|
| Application                    | Garden   |
| Warranty(Year)                 | 1-Year   |
| Power Supply                   | Solar  |
| Light Source                   | LED  |
| Lighting solutions service     | Lighting and circuitry design, Onsite metering, DIALux evo layout, LitePro DLX layout, auto CAD layout, Agi32 layout, Project Installation |
| Battery Included               | Yes  |
| Beam Angle(°)                  | 360  |
| Input Voltage(V)               | DC 2V  |
| Lamp Luminous Efficiency(lm/w) | 90   |
| Working Temperature(°C)        | -20 - 60   |
| Color Rendering Index(Ra)      | 80   |
| Certification                  | rohs, ce, Saa  |
| Support Dimmer                 | NO   |
| Lifespan (hours)               | 50000  |
| Product Weight (kg)            | 0.5  |
| Product name                   | ABS Solar outdoor stair light 1LED   |
| Power Supply                   | Solar  |
| Usage                          | Outdoor Garden Landscaping Decorative  |
| IP Grade                       | IP65 Waterproof  |
| Light color                    | white light/warm light/colorful  |
| Lighting time                  | 8~12hours  |
| Battery                        | 1.2V 600mAh AA Ni-MH Battery   |
| LED                            | 1Led   |
| Color                          | Brown/White/Black  |




|                        |         |
|------------------------|---------|
| Color Temperature(CCT) | 3500K   |
| IP Rating              | IP65    |
| Lamp Body Material     | ABS+PVC |



|                                |                 |
|--------------------------------|-----------------|
| Warranty(Year)                 | 2-Year          |
| Light Source                   | LED             |
| Lamp Luminous Efficiency(lm/w) | 110             |
| Lamp Body Material             | stainless steel |



|                            |                               |
|----------------------------|-------------------------------|
| Color Temperature(CCT)     | 3000K                         |
| IP Rating                  | IP54                          |
| Place of Origin            | Guangdong, China              |
| Item Type                  | Pillar Lights                 |
| Color Rendering Index(Ra)  | 80                            |
| Support Dimmer             | NO                            |
| Lighting solutions service | Lighting and circuitry design |
| Lifespan (hours)           | 50000                         |
| Product Weight (kg)        | 4                             |
| Input Voltage(V)           | AC 110V ( ± 10%)              |
| Lamp Luminous Flux(lm)     | 120                           |
| Working Temperature(°C)    | -15 - 50                      |
| Base Type                  | LED                           |
| Product Name               | Solar Led Pillar Light        |
| Usage                      | Garden Villa Park Lighting    |


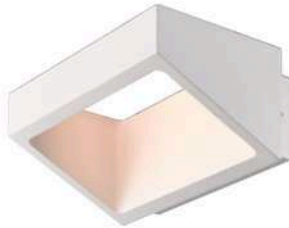


**DESCRIPTION**

Aluminium die-cast body, glass diffuser  
High strength toughened glass lampshade  
Aluminium body surface electrostatic plastic-coating treatment  
Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

| Material          | Voltage   | Wattage | Chip | More Info |
|-------------------|-----------|---------|------|-----------|
| Aluminium & Glass | 220V-240V | 6W      | COB  | IP65      |
| Aluminium & Glass | 220V-240V | 6W      | SMD  | IP65      |
| Aluminium & Glass | 220V-240V | 6W      | SMD  | IP65      |




**DESCRIPTION**

Aluminium die-cast body, PC diffuser  
Aluminium body surface electrostatic plastic-coating treatment  
Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

| Material       | Voltage   | Wattage | Chip | More Info |
|----------------|-----------|---------|------|-----------|
| Aluminium & PC | 220V-240V | 10W     | SMD  | IP65      |
| Aluminium & PC | 220V-240V | 20W     | SMD  | IP65      |



**DESCRIPTION**



Aluminium die-cast body, PC diffuser

Aluminium body surface electrostatic plastic-coating treatment

Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

| Material       | Voltage   | Wattage | Chip | More Info |
|----------------|-----------|---------|------|-----------|
| Aluminium & PC | 220V-240V | 10W     | SMD  | IP65 Ⓢ Ⓜ  |
| Aluminium & PC | 220V-240V | 10W     | SMD  | IP65 Ⓢ Ⓜ  |



**DESCRIPTION**

Aluminium die-cast body, PC diffuser

Aluminium body surface electrostatic plastic-coating treatment

Waterproof performance meets various demands of outdoor projects

CE EMC LVD RoHS CB

| Material       | Voltage   | Wattage | Chip | More Info |
|----------------|-----------|---------|------|-----------|
| Aluminium & PC | 220V-240V | 2x3W    | COB  | IP65 Ⓢ Ⓜ  |
| Aluminium & PC | 220V-240V | 4x3W    | COB  | IP65 Ⓢ Ⓜ  |




## | Track light series

### BASIC INFORMATION


|                     |                 |               |
|---------------------|-----------------|---------------|
| <b>WATT</b>         | 3W              | 5W            |
| <b>LUMEN</b>        | 170lm           | 200lm         |
| <b>PRODUCT SIZE</b> | L135xØ29.5xH110 | L135xØ30xW187 |

|                       |   |
|-----------------------|---|
| <b>VOLTAGE</b>        | 40-48V  |
| <b>CRI</b>            | Ra>90   |
| <b>FINISH</b>         | ● BK ○ WH ● BR  |
| <b>CCT</b>            | ● 3000K / ● 4000K / ● 5000K                                   |
| <b>SYSTEM OPTIONS</b> | On/off    zigbee    Bluetooth    mips    dimmable    TRI0 CCT |

### DIMENSION (unit: mm)

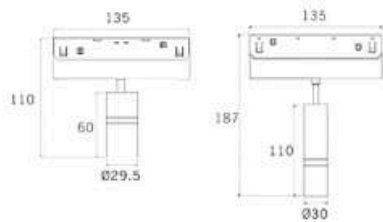

### BEAM ANGLE




## | Track light series

### BASIC INFORMATION

|                     |               |                 |                 |                 |
|---------------------|---------------|-----------------|-----------------|-----------------|
| <b>WATT</b>         | 5W            | 7W              | 12W             | 15W             |
| <b>LUMEN</b>        | 414lm         | 568lm           | 961lm           | 1266lm          |
| <b>PRODUCT SIZE</b> | L135xØ31xH113 | L135xØ31xH162.5 | L135xØ44.5xH149 | L135xØ44.5xH189 |




|                       |   |
|-----------------------|---|
| <b>VOLTAGE</b>        | 40-48V  |
| <b>CRI</b>            | Ra>90   |
| <b>FINISH</b>         | ● BK ○ WH ● BR  |
| <b>CCT</b>            | ● 3000K / ● 4000K / ● 5000K                                   |
| <b>SYSTEM OPTIONS</b> | On/off    zigbee    Bluetooth    mips    dimmable    TRI0 CCT |

### DIMENSION (unit: mm)

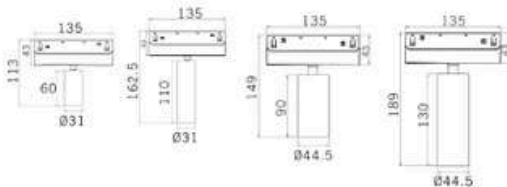

### BEAM ANGLE



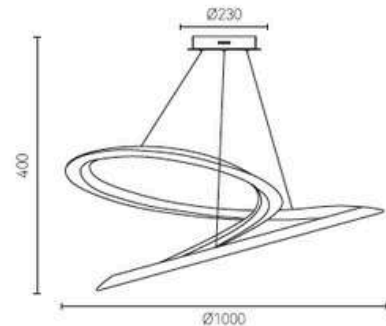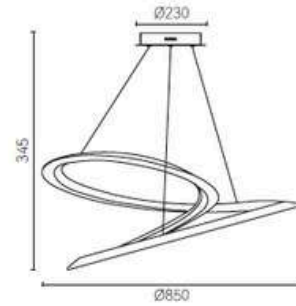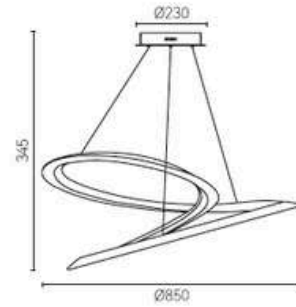

● Matt gold ● Matt black ● Matt white Material: Aluminium

## LED Tri-proof Light




RoHS CE



### Features & Applications


- ◆ Colour temperature 2,000-6,500 K
- ◆ Standard Colour rendering index Ra 80 and Ra 90 Optional
- ◆ Symmetrical light distribution, LED rated life 100,000h(L80,B10)
- ◆ 11mm supper narrow antenna, No dark area on sensor mode
- ◆ Planar antenna design, dual daylight harvesting, longer lifespan and reliability
- ◆ Multi-level dimming with fixed power sensor driver:
- ◆ RJ-45 plug-play crystal connetor for convenient quick connection
- ◆ Mounting Height: Max.5m (Ceiling mounted); 1.5-1.8m (Wall Mounted)

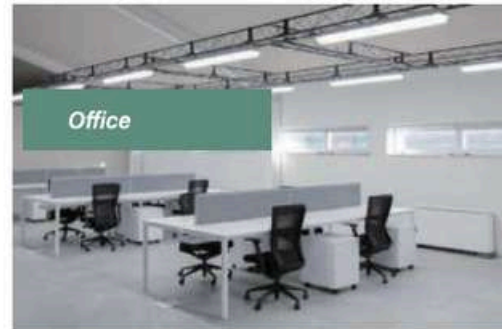

### Product Parameters

| Part Number | Input Voltage      | Wattage | LED typ.      | CCT (K)              | CRI | Beam angle | IP   | Lumens | Warranty (Years) |
|-------------|--------------------|---------|---------------|----------------------|-----|------------|------|--------|------------------|
|             | AC100-277V 50/60Hz | 21W     | LUMILEDS 2835 | 4000K /5000K / 6500K | 70  | 120°       | IP65 | 1800Lm | 3                |
|             | AC100-277V 50/60Hz | 40W     | LUMILEDS 2835 | 4000K /5000K / 6500K | 70  | 120°       | IP65 | 3600Lm | 3                |
|             | AC100-277V 50/60Hz | 55W     | LUMILEDS 2835 | 4000K /5000K / 6500K | 70  | 120°       | IP65 | 4800Lm | 3                |

### Light Distribution





**Patrick Bogaerts**  
Fondateur, CEO

### Contact

Téléphone : +33 6 07 93 79 98

Email : [Patrick@GPSMonacoGroup.com](mailto:Patrick@GPSMonacoGroup.com)

Site Web : <https://GPSMonacoGroup.com>