











Personal Protective Equipment Catalog



CONTENTS

Workwear & Safety Equipment
Catalogue 2024

Contents

	HEAD PROTECTION	P1
	WORKWEAR	P15
	MASK	P28
	SAFETY FOOTWEAR	P39
	SAFETY GLOVES	P55
	EYE PROTECTION	P75
	HEARING PROTECTOR	P84
	SAFETY VEST	P88
	HARNES & LANYARD	P93
	RAINWEAR	P97

CONTENTS

Workwear & Safety Equipment
Catalogue 2024

	WELDING & SHIELDS	P99
	KNEE PAD	P109
	TOOL BAG	P111
	DISPOSABLE COVERALL	P113
	LIFE JACKET	P115
	TRAFFIC SAFETY	P118
	EMERGENCY KIT	P128
	FIRE EQUIPMENT	P129
	HARDWARE	P130
	METAL BOX	P133
	BUILDING MATERIALS	P135

HEAD PROTECTION

Head Protection

Head Protection



Industrial Safety Helmet

Standard: EN397, ANSI Z89.1 (Type I, Class G/Class E)

Features: anti-puncture, anti-shock, Insulate

Helmet shell made from: PE, HDPE, ABS, Fiber Glass.

Suspension system liner harness: 4-point, 6-point, 8 point

Headband nape adjustment: plug press ; ratchet ; buckle

Headband Size Range: 53-61cm

With chinstrap, With sweatband.

Packing: Pre-Assembled or Separately in same carton



HEAD PROTECTION

Head Protection

Head Protection



HEAD PROTECTION

Head Protection
Safety Equipment



HEAD PROTECTION

Head Protection
Safety Equipment



HEAD PROTECTION

Head Protection
Safety Helmets



Head Protection



HEAD PROTECTION

Head Protection
Safety Helmets



Head Protection



Head Protection



HEAD PROTECTION

Head Protection
Safety Helmets



SAFETY HELMET



SAFETY HELMET



HEAD PROTECTION

Head Protection
Safety Helmets



SAFETY HELMET



SAFETY HELMET



SAFETY HELMET



SAFETY HELMET



SAFETY HELMET



HEAD PROTECTION

Head Protection
Safety Helmets



AC2000-100



AC2000-100

HEAD PROTECTION

Head Protection
Safety Helmets



AC2000-100



AC2000-100



HEAD PROTECTION

Head Protection
Safety Equipment



CS-10000000



CS-10000000



CS-10000000



CS-10000000



CS-10000000

HEAD PROTECTION

Head Protection
Safety Equipment



CS-10000000



HEAD PROTECTION

Head Protection
Safety Helmets

Solar Fan Helmet

Solar power, battery 120AmH. Solar panel: 5V 100AmH
 Helmet shell: ABS
 Function with fan, with LED light (1W)



Safety Brim / Sun Visor / Shade for helmet

Material: PE + cotton
 Width: 420mm
 Length: 445mm
 Hard hat brim with neck flap



HEAD PROTECTION

Head Protection
Safety Helmets



Bump Cap

Outer: 100% cotton,
 Liner: ABS shell





Coverall Uniform

Comply with: EN13688 Standard

Ordinary Fabric: Poly/Cotton 130-280g/m2;
100% Cotton 180-280g/m2

Flame Retardants Fabric: Paraffin (Ploban) 200-320g/m2;
Aramid 150, 198g/m2;
Nomex 150-200g/m3

(Special Optional: Acid and Alkali resistant; Static resistant)

Color: Blue, Red, Orange, Yellow, Khaki, Grey, White;
Size: S, M, L, XL, XXL, 3XL, 4XL, 5XL;
Class II High Visible Reflective Tape;
Printing, Rubber or Embroidery Customer Logo;
Below Model Styles or OEM;
Packing: one piece in a Opp bag & 25pieces in a carton.



WORKWEAR

Workwear for various professions
and environments



1000000000



1000000000



1000000000



1000000000



1000000000



1000000000

WORKWEAR

Workwear for various professions
and environments



1000000000



1000000000



1000000000



1000000000



1000000000



WORKWEAR

Workwear for the construction industry
with high visibility



WORKWEAR 01

WORKWEAR

Workwear for the construction industry
with high visibility



WORKWEAR 02



WORKWEAR 03



WORKWEAR 04



WORKWEAR 05



WORKWEAR 06



WORKWEAR

Workwear for various professions
and environments



Workwear 1



Workwear 2



Workwear 3



Workwear 4



Workwear 5



Workwear 6



Workwear 7



Workwear 8



Workwear 9



Workwear 10



WORKWEAR

Workwear for the modern worker
 designed for safety and performance



01-0000000000



02-0000000000



03-0000000000



04-0000000000

Gown for Experiment



05-0000000000



06-0000000000

WORKWEAR

Workwear for the modern worker
 designed for safety and performance



T-shirt

Material Fabric: 100% Cotton 120-260g/m2

65/35 PolyCotton 150-260g/m2



07-0000000000



WORKWEAR

Workwear for your business
 Customized workwear solutions



Workwear 01



Workwear 02



Workwear 03



Workwear 04

Mask

Workwear for your business
 Customized workwear solutions

Mask

Standard: EN149 (FFP1/FFP2/FFP3),
 NIOSH (N95,N99), Oil aerosols (R95,R99)
 AS/NZS: 1716
 Ds2

Material: polypropylene (120-240g); Terylene (200-260g);
 Non-woven fabric laminate (needle punch,
 melt blown, spun-bond);

Silicone body with different chemical powder cartridges
 Low breathing resistance and high filtration efficiency.



Disposable face mask



(Terylene)



(PP)



Workwear 05



Mask


የግንኙነት ጊዜ ለመጠቀም የሚያስፈልጉት
የተለያዩ ዓይነት ጥንካሬ ጥንካሬ

Basic Mask



Mask

የግንኙነት ጊዜ ለመጠቀም የሚያስፈልጉት
የተለያዩ ዓይነት ጥንካሬ ጥንካሬ

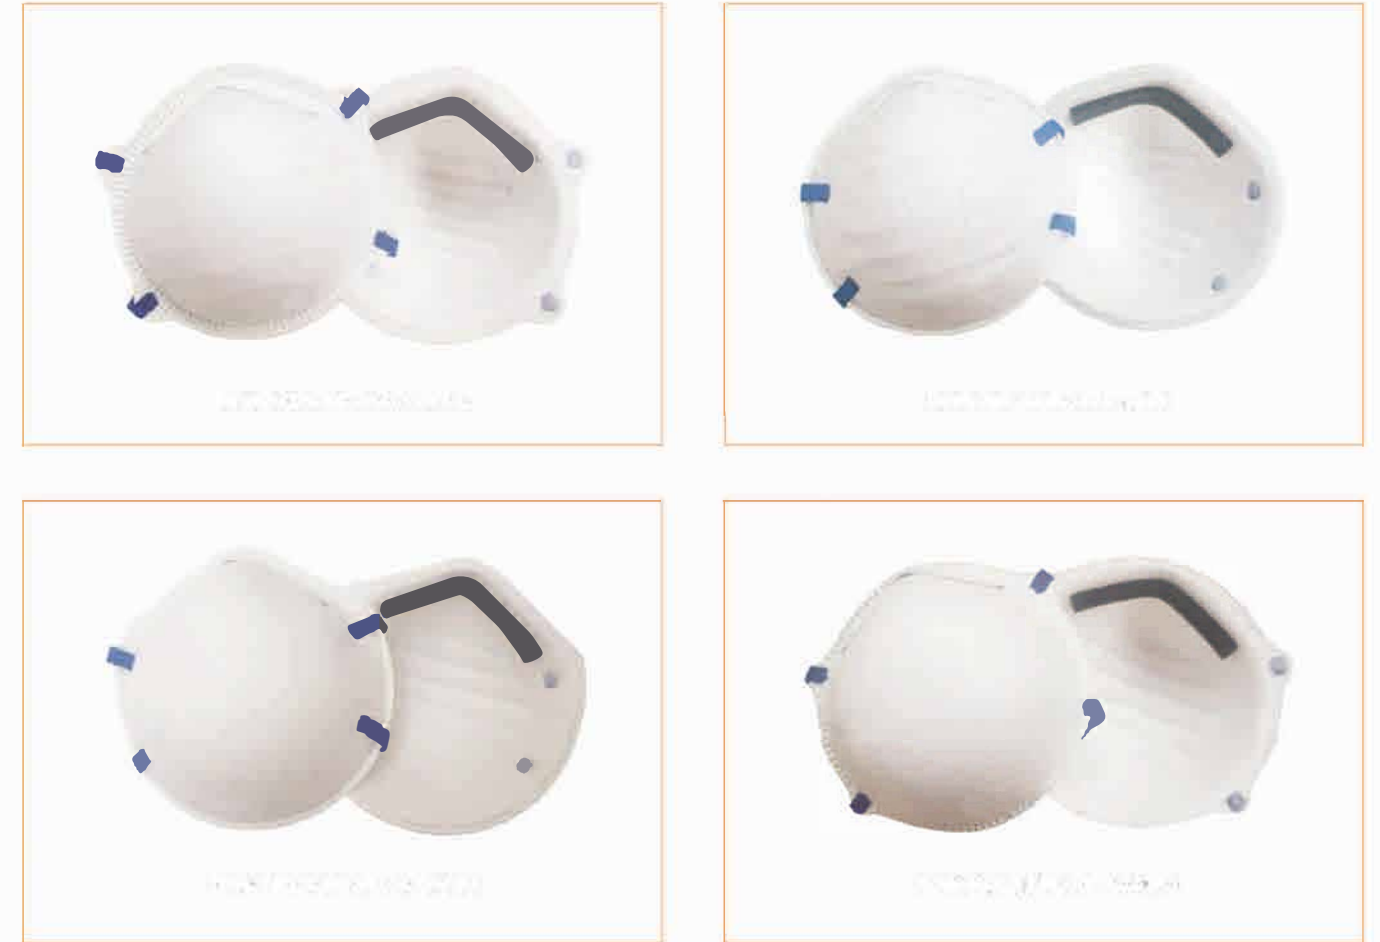

Mask with Valve



Mask

የግንኙነት ጊዜ ለመጠቀም የሚያስፈልጉት የጥንቃቄ ጥንቃቄ



Mask

የግንኙነት ጊዜ ለመጠቀም የሚያስፈልጉት የጥንቃቄ ጥንቃቄ



Mask with Active Carbon



Mask

97x20x100mm 3/4x4x2.5cm
 100% cotton



Mask

97x20x100mm 3/4x4x2.5cm
 100% cotton

Gas Mask / Respirator with Filter Cartridge



Cartridge filter with active carbon , 140g
 50pcs/60x27x43cm, 10/8kgs



Cartridge filter with active carbon . 220g
 50pcs/68x32x44cm, 15/14kgs



Cartridge filter with filter cotton , 102g
 50pcs/60x27x43cm, 8/7kgs



Cartridge filter with filter cotton , 142g
 50pcs/60x27x49cm, 9/8kgs



Mask

7000 Series Diamond Cartridge Mask



7000 Series Diamond Cartridge Mask

Soft Silicone body for long time comfortable wearing
Adjustable spandex headband
Match with series 7000 diamond cartridges for different poisonous gas & particulate

Model	Type	Approved	Remarks
7001	P-A-1	Organic Vapors	2 /Package
7002	P-B-1	Inorganic Vapors	2 /Package
7003	P-E-1	Acid gases	2 /Package
7004	P-K-1	Ammonia	2 /Package



3100 Series Round Cartridge Mask

Soft Silicone body for long time comfortable wearing
Adjustable spandex headband
Match with series 3100 round cartridges for different poisonous gas & particulate

Model	Type	Approved	Remarks
3101	P-A-1	Organic Vapors	1 /Package
3102	P-B-1	Inorganic Vapors	1 /Package
3103	P-E-1	Acid gases	1 /Package
3104	P-K-1	Ammonia	1 /Package



Mask

Grey-4#(K) and Brown-3#(A) Cartridge Mask



Grey-4#(K) and Brown-3#(A) Cartridge Mask

Grey-4#(K): for ammonia and hydrogen sulphide
Brown-3#(A): for organic vapors
Green-1#(B): for hydrocyanic acid, cyanogen chloride, cyanogen arsenide, phosgene, diphosgene, benzene, dichloromethane, yperite
Yellow-7#(E): for chlorine, sulfur dioxide, nitrogen oxide, hydrogen sulphide (escape only)



With 2 cartridge of #3



With 2 cartridge of #7



SAFETY FOOTWEAR

Workplace Safety Solutions
 Training & Equipment



Standard: EN ISO 20345 (Europe)

SAFETY CLASS(Reference EN345-1)

SB	
SBP	
S1	
S1P	
S2	
S3	

Key Symbols

	E/ Shock absorbant heel
	Steel toe cap
	WRU/ Water repellent upper
	Anti-slip sole
	P/ Steel midsole
	Oil and fuel resistant sole
	A/ Anti-static shoes

SAFETY FOOTWEAR

Workplace Safety Solutions
 Training & Equipment

Basic Function

Anti-slipping, Shock-absorption heel, Oil/fuel resistant, Weak acids/alkali resistant Out-sole

SB - Basic safety footwear with steel toe-cap "200 J"

SBP - Same as SB + resistance to perforation

S1 - Same as SB + Closed seat region + A + E

S1P - Same as S1+ resistance to perforation

S2 - Same as S1 + WRU

S3 - Same as S2 + P + Cleaned Out-sole

Additional marking symbols

P - Penetration resistant out-sole tested at 1100 newtons

A - Electrical resistance between foot and ground of between 0.1 and 1000 Mega Ohms *

HRO - Heat resistant out-sole compound tested at 300°C

E - Energy absorption of the seat region tested at 20 Joules

WRU - Water resistant upper leather

The standard of toe-cap

EN20345 Safety shoes and boots with a toe-cap, which is resistant to 200J

EN20346 Protective shoes and boots with a toe-cap, which is resistant to 100J


EN20347 work shoes and boots without toe-cap

(STANDARD EN 13287, A COMPULSORY PART OF STANDARD EN ISO 20345:2011 SRC.)



SAFETY FOOTWEAR

Специализированная обувь для профессионалов
 и любителей активного отдыха

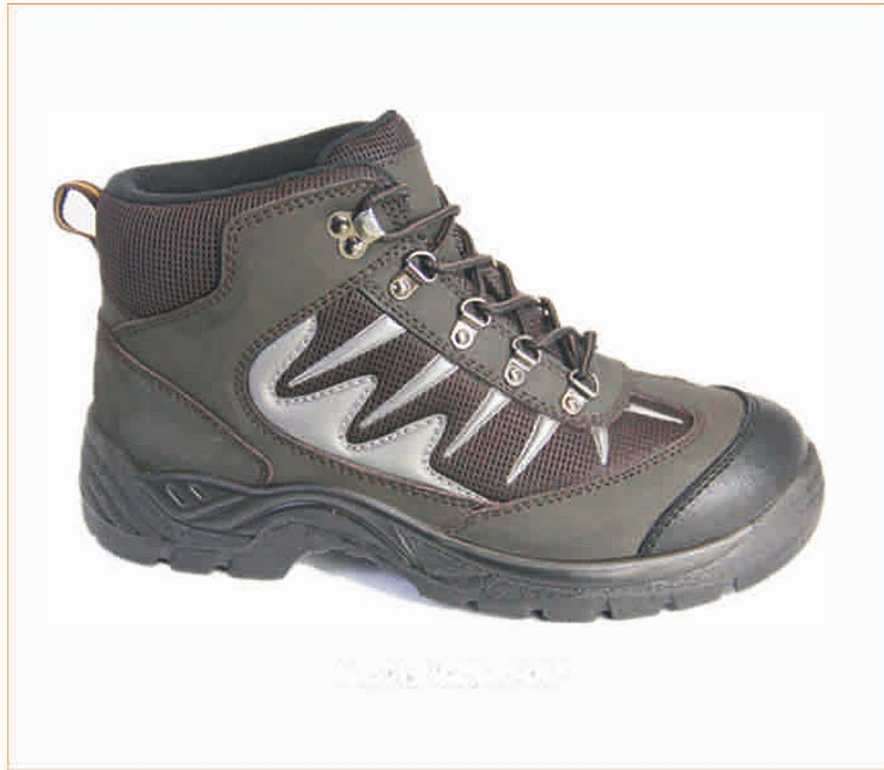

SAFETY FOOTWEAR

Специализированная обувь для профессионалов
 и любителей активного отдыха



SAFETY FOOTWEAR

Специализированная обувь для защиты от травм и повреждений



SAFETY FOOTWEAR

Специализированная обувь для защиты от травм и повреждений

Good-year Weltd (machine sewing)

Upper material: genuine leather 1.6-1.8mm thickness
(Nubuck leather, grain leather, crazy horse leather)
Liner: Air mesh lining; Cambrella lining; leather lining
Safety: 200J Steel/metal toecap or mid-sole
Sole: Rubber, Oxford,
Size: #36--#47 (American size 3-12)



SAFETY FOOTWEAR

Специализированная обувь для защиты от травм и заболеваний

Gum Boots (cleaning/rain boots)

Upper material: PVC, Rubber

Safety: 200J Steel/metal toecap or mid-sole

Sole: Rubber, Oxford,

Size: #36--#47 (American size 3-12)



SAFETY FOOTWEAR

Специализированная обувь для защиты от травм и заболеваний



SAFETY GLOVE S

Introduction:

EN388 **Protective Gloves Against Mechanical Risks**
EN388:2003
 This standard applies to all kinds of protective gloves in respect of physical and mechanical aggressions caused by abrasion, blade cut, tearing and puncture. This standard is only applicable in conjunction with EN420 (1 being the minimum performance rating).

REQUIREMENTS

PERFORMANCE LEVELS 1-4
d: PUNCTURE RESISTANCE:
 Force required to pierce the sample with a standardised punch.

Part II (performance Levels 1-4)
c: TEAR RESISTANCE:
 Maximum force required to tear the sample.

Performance Levels 1-5
b: BLADE CUT RESISTANCE:
 Number of cycles required to damage the sample at constant speed.

Performance Levels 1-4
a: ABRASION RESISTANCE:
 Number of cycles required to damage the sample at constant speed.

ANSI/ISEA 105-2011 American National Standard for Hand Protection

This standard addresses the classification and testing of hand protection for specific performance properties related to chemical and industrial applications. Hand protection includes gloves, mittens, partial gloves, or other items covering the hand or a portion of the hand that are intended to provide protection against or resistance to a specific hazard.

Glove & Hand Size Chart as per Standard EN420

Hand Size	6	7	8	9	10	11
Palm Circumferences (mm)	152	178	203	229	254	279
Hand Length (mm)	160	171	182	192	204	215
Minimal Glove Length (mm)	220	230	240	250	260	270
Palm Circumferences (inches)	6"	7"	8"	9"	10"	11"
Hand Length (inches)	6-6 1/2	6 1/2-7	7-7 1/2	7 1/2-8	8	8 1/2
Minimal Glove Length (inches)	8 1/2	9	9 1/2	9 1/2-10	10-10 1/2	10 1/2-11
Glove Size	XS	S	M	L	XL	XXL
	6	7	8	9	10	11

String Knit Gloves & Dotted

Material: 100% Cotton ; T/C yarn: canvas
 Weight: 400g, 500g, 600g, 700g, 750g, 800g, 900g, 1000g, 1200g/dozen, PVC Polka Dots,
 Color: bleached/natural white, black, blue, red
 Length: 10", 10.5"

EN407 **Protective Gloves Against Thermal Risks (Heat and/or Fire)**
EN 407: 2004
 This standard specifies thermal performance for protective gloves against heat and/or fire. The heat and flame pictogram is accompanied by a 6 digit number.

REQUIREMENTS

PERFORMANCE LEVELS 1-4
f: RESISTANCE TO A LARGE MELTING METAL SPRAY:
 Amount of spray required to raise the glove to a certain temperature.

PERFORMANCE LEVELS 1-4
g: RESISTANCE TO SMALL MELTING METAL SPRAY:
 Amount of spray required to raise the glove to a certain temperature.


PERFORMANCE LEVELS 1-4
d: RESISTANCE TO RADIATING HEAT:
 Time required to raise a given temperature level.

PERFORMANCE LEVELS 1-4
c: RESISTANCE TO CONVECTIVE HEAT:
 Time during which the glove is able to delay the transfer of heat of a flame.

PERFORMANCE LEVELS 1-4
i: RESISTANCE TO CONTACT HEAT:
 Temperature (within the range of 100C to 500C) at which the person wearing the gloves will not feel any pain for a period of at least 15 seconds.

PERFORMANCE LEVELS 1-4
a: RESISTANCE TO FLAMMABILITY:
 Time during which the material remains lit and continues to be consumed after the ignition source has been eliminated.

TEST	Level 1	Level 2	Level 3	Level 4	Level 5
Abrasion resistance(- number of cycles)	100	500	2,000	8,000	-
Blade cut resistance (index)	1.2	2.5	5	10	20
Tear resistance (N)	10	25	50	75	-
Puncture resistance (N)	20	60	100	150	-

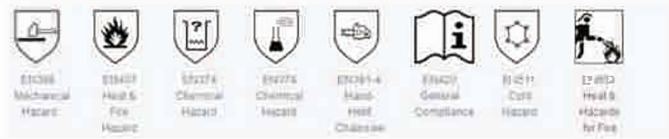

SAFETY GLOVE'S



SAFETY GLOVES

Hand Protection
Safety Glove



Mechanical Gloves

For Universal Working
Cow-split leather, cotton/canvas fabric



A/B grade



Rigger Gloves



pasted cuff

SAFETY GLOVES

Hand Protection
Safety Glove



Double Palm Reinforced



SAFETY GLOVE'S

Hand Protection Solutions



● Full leather, driver & rigger glove



SAFETY GLOVE'S

Hand Protection Solutions



Welding Gloves



SAFETY GLOVE'S

Hand Protection Solutions
Safety Glove Solutions



SAFETY GLOVE'S

Hand Protection Solutions
Safety Glove Solutions

Coating Gloves

Comply with EN420, EN388:
Liner with 7G, 10G, 12G, 13G, 15G, 18 Polyester/Cotton or Nylon;
Palm coating with various material for protection;
(NLR, NBR , NE, PVC, PU)
General Handling Range;
Half or 3/4 or full dipped coating

Latex Coated

Latex or Rubber Plain/Crinkle finish Coating;
Thermal / fleece Grip for winter & extreme cold:
(canvas lining, jersey / cotton lining)
Offer grip tight support in dry and wet moist condition.



SAFETY GLOVES

Hand Protection Solutions
 Safety Glove Solutions



(micro foam)



(micro foam)



(micro foam+pvc dots)



(micro foam+spandex)



(micro foam)



(micro foam)



(micro foam+pvc dots)



(micro foam+spandex)



super durable latex with textured finish

Nitrile Coated

- Prevent Grease, Oil and Water Penetration;
- Smooth finish/ Sandy finish/ Micro foaming finish;
- Nitrile coating prevent grease, oil & water penetration;
- Anti-snap , puncture and common Grade 1/2 cutting resistant;
- Anti-abrasive & grip tight in dry and oily condition



(micro foam)



(micro foam+pvc dots)

SAFETY GLOVE'S

Hand Protection Solutions
 Safety Glove Solutions



(micro foam)



(micro foam)



(micro foam)



(micro foam)



(micro foam)



(micro foam)



(micro foam)



(micro foam)



SAFETY GLOVE S

Hand Protection Solutions
Safety Glove Solutions

● PU Coated

Water based PU coating anti-Irritant skin;
Smooth finish/ Foam finish(Nylon & Spandex);
Anti-abrasive & grip tight under dry condition;
(Fingertip dipped to against nicks and cuts)



● PVC Coated

Smooth finish or Sandy finish;
With Knit wrist or Safety cuff;
Soft cotton interlock lining or jersey lining;
Anti-abrasive & grip tight in dry, wet moist and oily condition;

SAFETY GLOVE'S

Hand Protection Solutions
Safety Glove Solutions



(sandy rough)



(smooth)



Gauntlet 27cm/30cm/35cm/45cm
Against Chemical and micro-organisms

Anti-Impact Gloves

According to EN420, EN388 (ANSI/ISEA 105)
Hppe/Nylon/Polyester liner with Spandex;
Nitrile coated; PVC/TPR/Silicone sewn back;
(Synthetic leather, Neoprene, Lycra, reflective)
Grip & Cut Resistant, Anti vibration



SAFETY GLOVES

Cut Resistant

Comply with standard EN420, EN388,
 Chrome Leather or PU/Nitrile coating,
 HPPE, Glass fibre, Kevlar, Aramid Knitting,
 For safe handling of sharp objects: wood carving, chisel, grinder, sharpener...



Kevlar knit, cut 5 (10", 12")



HPPE, latex coat, cut 5



HPPE, cut 5



HPPE+metal wire, cut 5



HPPE, nitrile coat, cut 5



HPPE, PU coat, cut 5

SAFETY GLOVES



HPPE, latex coat, cut 5



HPPE +metal wire, cut 5



HPPE, nitrile coat finger, pvc dots



HPPE+cow leather, cut 5



HPPE+cow leather, cut 5



HPPE, cow leather, cut 5



HPPE fiber with metal wire, cut 5



Item No.: GMT-CR50A, B, C
 Grey HPPE (Dyneema), cow split leather palm, cut 5;
 HPPE+Kevlar fiber, cow split leather palm, cut 3 & 250°C;
 Kevlar fiber, cow split leather, cut 2 & 300°C



SAFETY GLOVES



100% Kevlar, pvc dots, cut 3



13G HPPE, food grade silicone, cut 5



cut resistant sleeves 14"/28"/22", two layers HPPE+Kevlar, cut 5

Chain Mail Protective Glove

(Cut Resistant Glove)

Material: AISI 304L stainless steel, wire diameter 0.53mm

Ring Dia: 3.81/ 2.75mm

Size: XXS, XS, S, M, L, XL

Perimeter(inch): 5-5.5 6-6.5 7-7.5 8-8.5 9-9.5 10-10.5

Five fingers type, Left & Right Universal,

Full hands protection according to European directive

EN1082-1:1996

Washing in soapy water (50°C) & rinsed in hot water (min 82°C) to disinfected

Application: Slaughterhouse, Seafood/Delicatessen/Food processing, Restaurant, Police...

Packing: 1piece in a color-bag, 10 pcs in a poly-bag,

50pcs in a carton (31x24x16cm)



SAFETY GLOVES

Heat Resistant (FR)

Comply with EN407

Nomex, Kevlar, Aramid Knitting fiber,

For oven, baking, food industrial, barbecue, fireplace...



(500°C) Cotton liner, outer 100% Aramid, food grade silicone coat



cotton liner, outer 85% Nomex 15% Kevlar



Cotton liner, outer 100% Aramid,



SAFETY GLOVE S

Hand Protection Solutions
Safety Glove Solutions

Cotton liner, outer 85%Nomex15%Kevlar, food grade silicone coat, 26-45cm



Cotton liner, outer 100% Aramid, food grade silicone coat, 26-45cm



SAFETY GLOVE'S

Hand Protection Solutions
Safety Glove Solutions

Latex Gloves

Ordinary Hand Size Range:

S: 6.5-8.0cm; M: 8.0-9.5cm; L:9.5-11cm; XL:11-12.5cm

Ordinary Length: 27-35cm(14")

Household (Nitrile) gloves

Flock lining, beaded cuff in fish-scale pattern



Industrial Latex gloves

Flock lining, beaded cuff in smooth, rough or fish-scale/textured pattern



SAFETY GLOVES

Hand Protection Solutions
 Safety Glove Solutions

Nitrile Glove

Against Chemical Hazards,
 Gauntlet with textured pattern,
 13mil(0.33mm)/15mil(0.38mm)
 Use in chemical, oil and food industries



Electric Gloves

1KV, 5KV, 10KV, 12KV, 25KV, 35KV
 Material: Rubber, Latex



SAFETY GLOVE'S

Hand Protection Solutions
 Safety Glove Solutions

Disposable Gloves

AQL 1.5 (Acceptable Quality Level)
 Powder (talc) or Powder Free Color: White , Blue
 Surgical in sterilization packing, (sterile by Gamma or EO texture)
 1 pair/Backing paper&paper bag (Paper peel to open pouches)



EYE PROTECTION

Eye protection for the workplace
 Safety glasses and goggles



Safety Goggles

Standard: CE EN166:2001, ANSI Z87.1
 Soft face frame, nose bridge pad
 With indirect ventilation
 Lens: PC, PVC
 Option: Anti-scratch; Anti-fog; UV protection
 Impact resistant



Model 12345678



Model 12345678



Model 12345678

EYE PROTECTION

Eye protection for the workplace
 Safety glasses and goggles



Model 12345678

Model 12345678

Model 12345678



Model 12345678



EYE PROTECTION

Eye protection for all types of work
 and activities



Safety Glasses/ Spectacles

Standard: EN166:2001, ANSI Z87.1
 Lens: PC
 Leg: PC ; Nylon
 Option: Anti-scratch; Anti-fog; UV protection
 Impact resistant
 Packing: header card; Opp bag



EYE PROTECTION

Eye protection for all types of work
 and activities



EYE PROTECTION

Средства защиты органов зрения
для обеспечения безопасности



EYE PROTECTION

Средства защиты органов зрения
для обеспечения безопасности



EYE PROTECTION

Eye protection is essential for safety in many work environments. It helps prevent eye injuries from flying debris, dust, and chemicals.



TEAL SAFETY GOGGLES



TEAL SAFETY GOGGLES



BLUE SAFETY GOGGLES



SAFETY GOGGLES COLLECTION

HEARING PROTECTOR

Hearing protectors are used to reduce the risk of hearing loss from noise in the workplace. They come in various forms, including earplugs and earmuffs.



Ear Muff

Standard: EN352, ANSI S3.19, AS/NZS 1270:2002
SNR: 27db

STRUCTURE



HEARING PROTECTOR

Средства защиты органов слуха
для профессионалов



СЗРП-01



СЗРП-02




СЗРП-03



СЗРП-04



СЗРП-05

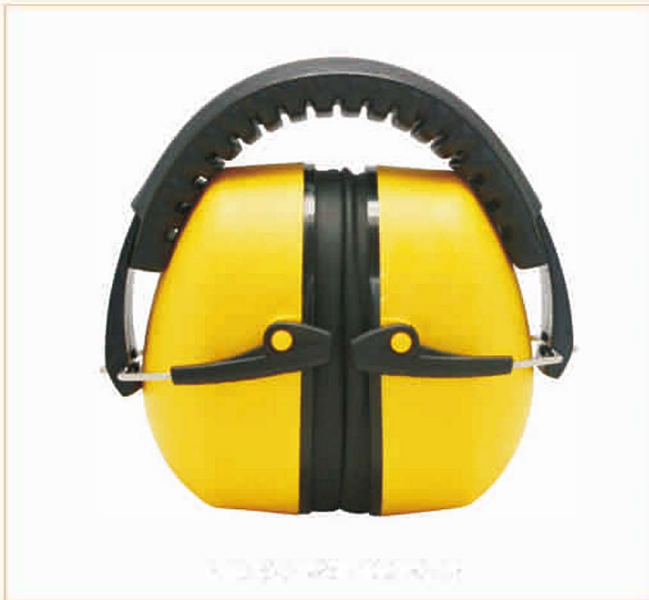

СЗРП-06

HEARING PROTECTOR

Средства защиты органов слуха
для профессионалов



СЗРП-07



СЗРП-08



СЗРП-09



СЗРП-10



СЗРП-11




СЗРП-12



HEARING PROTECTOR

97-00011001 734-p001-01-000001
 97-00011001 734-p001-01-000001

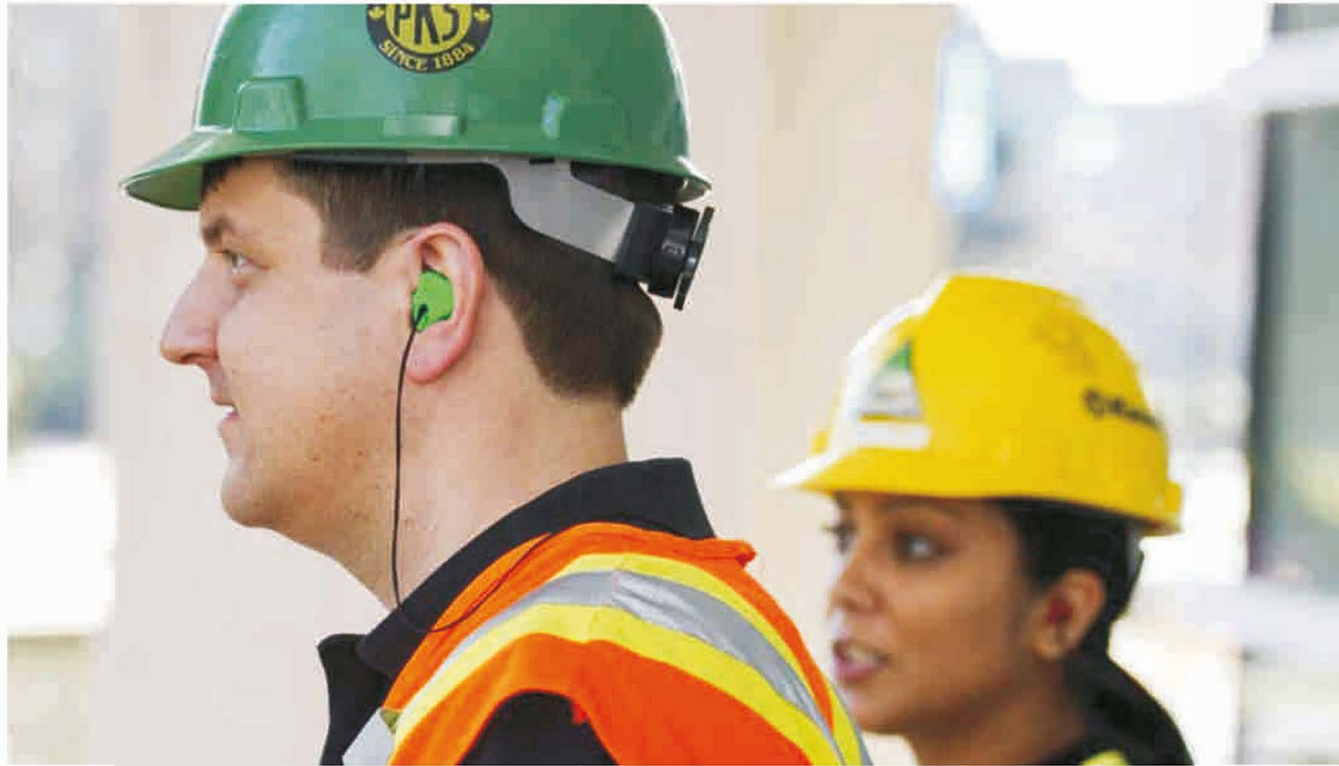

Ear Plug

Standard: EN352, ANSI S3.19, AS/NZS 1270:2002
 Material: PU Sponge foam(Disposable); Silicone (Reusable)
 With PVC or cotton string; Without string line
 Packing in opp bag or PVC box
 SNR: 27-34db



97-00011001 734-p001-01-000001



97-00011001 734-p001-01-000001



97-00011001 734-p001-01-000001



97-00011001 734-p001-01-000001



Silicone
 97-00011001 734-p001-01-000001

SAFETY VEST

97-00011001 734-p001-01-000001
 97-00011001 734-p001-01-000001

Standard: EN471
 Material: 100% Polyester (60-140gsm);
 100% Mesh (50-120g);
 Color: fluorescent Yellow, Orange, Green, Red
 Ordinary A1 Reflective Tape; A2 high reflecting tape
 Application: traffic, building construction, roadwork, railway, truck, warehouse, parking.
 Packing: one piece in a poly-bag, 100 pieces in a carton



Reflective Vest



97-00011001 734-p001-01-000001



97-00011001 734-p001-01-000001



SAFETY VEST

90% polyester 140gsm
bird eye fabric



1025120103



1025120102



1025120104



1025120105



1025120106

SAFETY VEST

90% polyester 140gsm
bird eye fabric



1025120107



1025120108



1025120109



1025120110



1025120111

Reflective Shirt



100% polyester 140gsm
bird eye fabric

pocket

inside fabric

reflective tape
at night

reflective tape
in daytime



1025120112



SAFETY VEST

91



SAFETY VEST

92

Reflective Jacket



Cooling Vest


Sorbet gel, water gel, PCM, hard gel,
 Weight: 1.5KG
 Refrigerator freeze 5 hours, work time: 6-8 hours




HARNES & LANYARD

Safety harness

Standard: EN361
 Webbing material: Terylene / polyester (45mm width)
 Stamping or forged hardware
 dorsal or waist attachment forged D-ring
 (webbing loops on front)
 (Comfort pad on waist strap)
 Adjustable strap with PE buckles
 (adjustable snowboard binding ratchet buckle)
 Strength>23KN

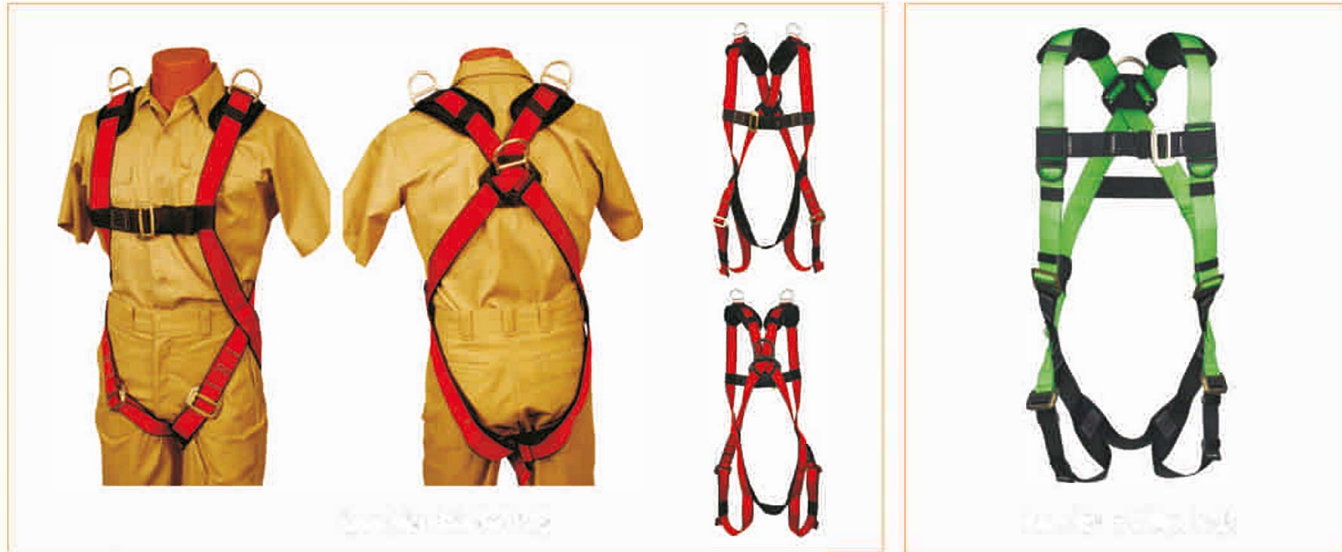

HARNES & LANYARD

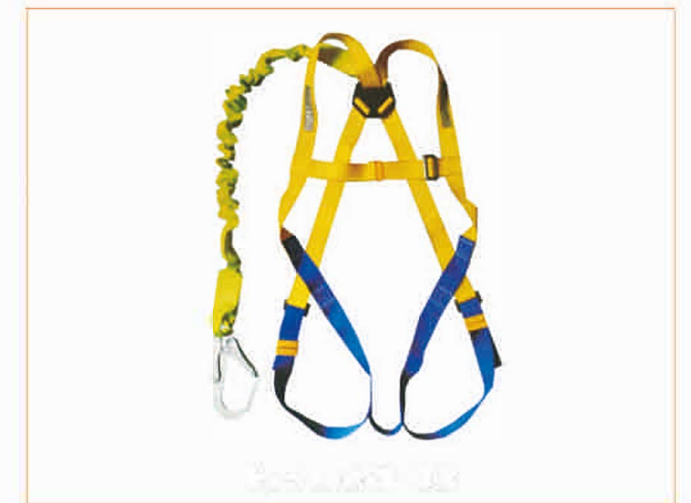

HARNES & LANYARD



Lanyard (Retractable Fall Arrestor)

Standard: EN355

Forged hook & rings, with energy absorber



HARNES & LANYARD



Back support Belt

Material: oxford

Elastic for comfortable fit

Full back support strength for doing heavy duty work

Size: S (28"-32") , M (32"-38")

L (38"-47") , XL(46"-56")

Packing: blister card



BACK SUPPORT BELT

INSTRUCTIONS FOR USE



Use To Reduce Repetitive Back Strain



1. Slip on suspenders and position comfortably around waist, hips and rib cage. Pull side panels over each other until snug engaging.
2. Stretch outer elastic straps forward and press down to secure panels.
3. Adjust belt tension and suspenders for comfortable fit.



RAINWEAR

97

Rainwear

Standard: EN343

Material: PP (0.28,0.30,0.32,0.35mm thickness);

PPP (0.30,0.32,0.35mm thickness);

(170T/190T/210T) Polyester coated PVC;

Nylon coated PVC; Nylon coated PU;

PU coated PVC;

with knitting fabric

Color: Yellow, dark blue, orange, dark green

With Snap button and storm flap

Size: M,L,XL,XXL,3XL,4XL,5XL



160000 (long coat)



160000 (coat and pants)

RAINWEAR

98



160000 (bib suit)



160000



160000



160000



160000



160000



WELDING & SHIELDS

Welding mask

Standard: EN175



Welding mask

Standard: EN175



WELDING & SHIELDS

Welding mask

Standard: EN175



WELDING & SHIELDS

Welding & Shields

Welding & Shields



12000000000



12000000000



12000000000



12000000000 (108X50mm)



12000000000



12000000000



12000000000



12000000000

WELDING & SHIELDS

Welding & Shields

Welding & Shields



12000000000



12000000000



12000000000

Face Shield



12000000000



12000000000



12000000000



12000000000

Weight: 205g Lens: PVC
Packing: 40pc/54x24x50cm, 12/11kgs





Screen Mesh. Size 20x39cm


- Clipping extra ABS material
- Fixed in size, adjustable for best fit (adjust its perfectly to protect helmet)
- Flip up to adjust 4 viewing angles.
- Silver mesh screen

PRODUCT PHOTOGRAPH





- HDPE material helmet
- Easy size top adjustment
- ABS shell ear cup
- High quality sponges in the shell
- Steel mesh shield
- Full set: helmet CE NF EN 387-A1 02.011.5, NF EN 1751-11 2017 04.02.01.2003

PRODUCT PHOTOGRAPH

PRODUCT PHOTOGRAPH




visor + earmuff




helmet+visor+earmuff

Welding rod

Welding electrodes, 14inch long, 1/8 inch diameter (3.2mm)



WELDING & SHIELDS

Welding & Shields
Welding & Shields

Electric Welding Clamp



Welding Clamp

Spec: sheet iron/tin or forged

Size: 300a 500a

Packing: 50pcs/46x36(38)x25(27)cm, 16(18)/15(17)kg

MOQ: 2000 each

Welding Chipping (Slag) Hammer



Welding Chipping Hammer

Weight: A:300g B:500g

Packing: 50pc/32x22x22cm 18/17kgs.

Earth Clamp



Earth Clamp

Size: 300a 500a

Packing: 50pcs/38(49)x18(43)x33(23)cm.

12(17)/11(16)kg

Welding Apparel

High-quality split leather

Soft, durable, abrasion resistant, heat resistant

Sewing: Ordinary or DuPont Kevlar fire-resistant thread

Double stitching on key parts

Tie-wrap / Velcro / Buckle fasten



Welding Hood

Welding Hat

WELDING & SHIELDS

Welding & Shields
Welding & Shields



Welding Hood



Welding Hood



Welding Hood

Welding Sleeves



Welding Sleeves



Welding Sleeves

Welding Apron



Long Apron 90x60cm
Cow split leather



Long Apron 90x60cm
Cow split leather



WELDING & SHIELDS

Welding & Shields



Long Apron 100x60cm
Cow split leather



Long Apron 90x60cm
Cow split leather



Long Apron 90x60cm
Cow split leather



Long Apron 100x60cm
Cow split leather



Long Apron 90x60cm
Cow split leather

WELDING & SHIELDS

Welding & Shields

Welding Banket (Foot-Cover)



Welding Clothes



Welder Suit



Apron + Sleeves + shoe cover



KNEE PAD

Welding mask



Welding mask

Standard: EN14404



Material: PP420D + oxford **Feature:**

WELDING MASK
KNEE PAD

1. light weight, durable knee protection
2. heavy plastic caps on front for easy knee swiveling
3. comfortable, double elastic straps with easy-on/off fasteners for good fit

Color: black/white



Material: PU + oxford

Feature:

1. slip resistant grip cap provides better strength on floors
2. special gel foam increases comfort for the knee and longer Usage
3. high-quality flexible neoprene strap
4. suitable for using on all kinds of surfaces

Color: black /transparent



KNEE PAD

Welding mask



Material: PU + oxford

Feature:

1. GEL silicone cover
2. super thick 1/2" high density, closed cell foam
3. large caps are over sized for more protective coverage
4. NEOPRENE lower straps securable the knee for comfort all day long
5. used by masons, roofers and professionals of all trades

Color: black /transparent



Material: PU

Adjustment: with belt

Color: black, yellow, blue

Packing in plastic bag with card



TOOL BAG

(tool pouch)

Work bag for scaffolding work



Scaffolding tools pouch

Leather



1001-1002



1001-1003



1001-1004

Canvas



1001-1005



1001-1006



1001-1007

TOOL BAG

(tool pouch)

Work bag for tower crane work



1001-1008



1001-1009

Tower Crane Kit



1001-1010

Material: PVC. Band 1.5T
 Bottom cushion: O-pine board
 S: 20x40cm -- 100KG
 M: 30x50cm -- 150KG
 L: 40x70cm -- 200KG



LIFE JACKET

Life jackets are used to keep people afloat in the water. They are essential safety equipment for anyone who is on a boat or in a small craft.



Floating vest

Material: Polyester and sponge
Buoyancy $\geq 74N$



HOW TO PROPERLY FIT A LIFE JACKET

- CHECK LIFE JACKET LABEL FOR THE APPROPRIATE WEIGHT OR CHEST SIZE.**
The life jacket label will indicate the size and weight of the intended user. Make sure the wearer is within these ranges. Verify that the life jacket label states it is "Coast Guard approved."
- PUT THE LIFE JACKET ON.**
Inspect the life jacket for wear and tear. Warning signs include rips and missing or broken buckles or straps.
- BUCKLE ALL STRAPS AND TIGHTEN OR ZIP UP ALL ZIPPERS.**
Make sure all straps can be buckled and zippers zipped. Don't forget the catch strap if there is one!
- HAVE THE WEARER LIFT THEIR ARMS OVER HEAD AND GENTLY LIFT THEM BY THE TOP OF THE LIFE JACKET ARM OPENINGS.**
If the jacket rides up above their ears, it's too big. If the straps or zippers don't close, the jacket is too small.

WWW.SGAT.US.ORG

LIFE JACKET

Life jackets are used to keep people afloat in the water. They are essential safety equipment for anyone who is on a boat or in a small craft.



LIFE JACKET

1. 2024年最新款
2. 2024年最新款



Work Vest



Life Buoy

Orange color
 Outside material: HDPE
 Inside material: hard PU
 Size: 1.0kg, 720x440mm, buoyancy ≥ 14.5 kg
 Size: 2.5kg, 720x440mm, buoyancy ≥ 14.5 kg
 Size: 4.3kg, 760x440mm, buoyancy ≥ 18.5 kg



TRAFFIC SAFETY

1. 2024年最新款
2. 2024年最新款



Traffic Cone

PVC

Material: PVC (poly-vinyl chloride) with UV inhibitors
 One piece injection molded for anti tear or split ;
 Cones retain its shape and do not crack even after repeated impact;
 Reflective bands for superior safety warning at night
 LED light could be fixed on top of cone
 Ordinary come with common reflective bands
 (Option 1 Grey high-luminance stick reflective tapes)
 (Option 2 Golden high-luminance stick reflective tapes)



30cm, 0.6kg,
 base 22x22cm, 1800pcs/pallet



45cm, 0.9/1.1kg,
 base 28x28cm. 1040pcs/pallet



45cm, 1.5kg,
 base 28x28cm, 1040pcs/pallet



TRAFFIC SAFETY

High quality traffic safety products
with excellent performance



(T-top)
Height 115cm, Weight 6.75kg,
Reflective 25cm, 10pcs/ctn,
1450pcs/20"GP



Height 115cm, Weight 6.75kg,
Reflective 10+10cm, 10pcs/ctn,
1450pcs/20"GP



(Flex Bollard)
Material: PE (polyethylene)--rugged
and durable,
Top & Base elastic joint ensures bollard
returns to upright position,
Molded rings accept a range of ropes or
chain



(Warning Bollard)
Material: EVA
Light weight, high luminance, long life time
and UV resistance,
Installed through metal mounting plate with
screw,
(Accompany with screws and spanner)

Height 80cm, base 26cm, Reflective 30cm,
10pcs/ctn, 1750pcs/20"GP

Aesthetic appearance color and ideal functional street decoration
Height 72cm, Weight 1.5kg, Reflective 9cmx2, 9pcs/ctn, 950pcs/20"GP



(Warning Panel)
Material: PE panel and Rubber base
Both Panels and base can be easily assembled,
separated and stacked
Molded in Top handle that also mounts LED flashers
Height 1100cm, Weight 11+2kg, 10pcs/bag,
1500pcs/20"GP



Material: PVC Weight: 850g/ 550g

TRAFFIC SAFETY

High quality traffic safety products
with excellent performance

Plastic Chain



yellow/black, black, blue, yellow, white, red, white/red
4mmx27mmx16mmx40g--round
12mmx65mmx40mmx300g--round
8mmx38mmx27mmx100g--flat

6mmx25mmx22mmx70g--round
6mmx27mmx20mmx60g--flat
8mmx54mmx27mmx106g--flat

10mmx55mmx38mmx185g--round
6mmx41mmx21mmx60g--flat
25M/roll, 50M/roll

Conduct Baton

Handle traffic conduct
Tubular shape flashing baton
Intermittent led light
Flashing baton: Flash-steady-(white light)-close



28x2.9cm: 3 x AAA batteries (#7)



52x3cm: 2 x C batteries



54x4cm: 2 x D batteries



Chargeable



TRAFFIC SAFETY

High quality traffic signs and road marking equipment

Roadblock light



Lantern Battery light



Lantern Battery light



Lantern Battery light



Solar power floodlights



Solar power floodlights

Anti- Glare Panel

Material : ABS

Light weight, long life time and UV resistance

Good anti-corrosion property, stable chemical property, not react with acids and bases

Aesthetic appearance and color, ideal functional freeway decoration

Custom stenciling of company name or logo available and acceptable to other colors

Height 600mm, Width 235mm, Weight 1.0kg



Warning Triangle

According to Road Traffic Act 1988-Section 80

Packing: one piece in a plastic box



TRAFFIC SAFETY

High quality traffic signs and road marking equipment

Speed Hump Barrier

Comply with EN 12100



Middle: 500x350x50mm

End: 175x350x50mm

Rubber Speed Cushion

Comply with EN 12100

Length 900mm x Width 750mm x Height 65mm x 5screw

Color: Red/ Black

Assembled by 6-8pcs or randomly

Wheel Localizer



1650x140x100mm



900x150x100mm



550x150x100mm



240x165x195mm



270x120x180mm

Corner Guard



Height 800mm, Ply 8/10/12/14/16mm



Height 800mm, Ply 20mm




TRAFFIC SAFETY


www.traffic-safety.com

Safety Fence

Material: PE
 Weight: 90-120g
 Width/Height: 1.0M, 1.2M, 1.5M
 Length: 50M, 30M, 100M
 Color: Red, Blue, Green, Yellow, Black

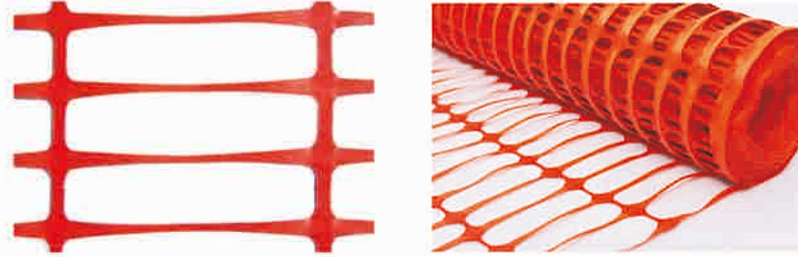

www.traffic-safety.com

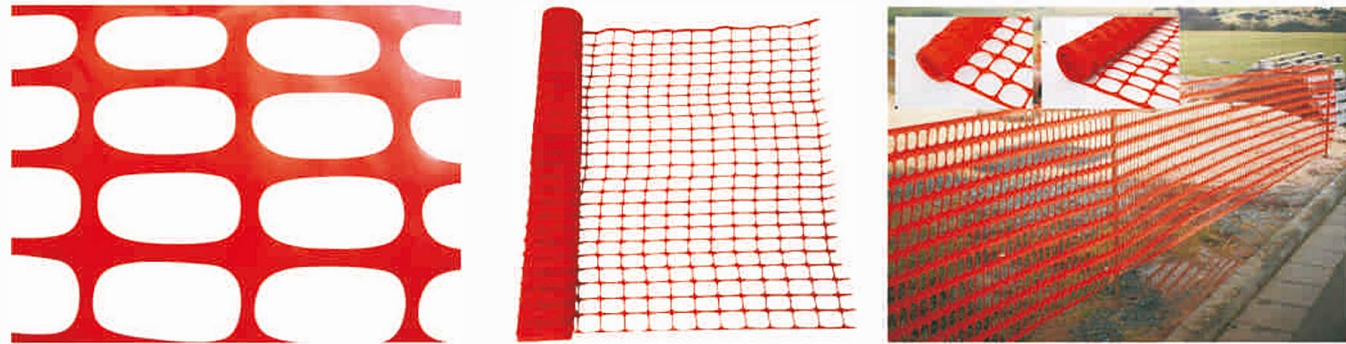

www.traffic-safety.com

Barrier Tape



Width: 50, 70, 75, 100mm
 Length: 100-500M
 Thickness: 0.035, 0.05, 0.07, 0.1mm

www.traffic-safety.com

Stick warning tape for Vehicle, garage, wall, parking
 5cm or 10cm width, 1M-50M/roll

EMERGENCY KIT

www.emergency-kit.com

First Aid Kit



Ordinary Content:

- Adhesive tape: 1/2"x 5yards, 1roll
- Adhesive bandage strip: 1.9x7.2cm, 10pcs
- Adhesive bandage dressing: 6x10cm, 2rolls
- Gauze pad: 3"x3", 5pcs/pkt, 1pc
- Gauze pad: 4"x4", 2pcs/pkt, 2pcs
- PVC gloves: L size, 2pairs
- Cotton tipped: 20pcs/pkt, 20pcs
- Sterile absorbent cotton: 10g, 1bag
- Alcohol prep pad: 3x3cm, 2ply, 10pcs
- Sterile eye pack: 6x8cm, 1pc
- Safety pin: 2pcs
- Bandage scissors: 13.5cm, 1pc
- Elastic bandage: 2"x5yards, 1pc
- Elastic bandage: 3"x5yards, 1pc
- Plastic tweezers: 12.5cm, 1pc
- Triangular bandage: 36"x54"x36", 1pc
- Emergency blanket: 130x210cm, silver, 1pc
- Mouth to mouth breath mask: 1pc
- Can add reflective vest, torch and customize logo on bag.

Ordinary Content:

- Adhesive bandage: 19mm x 72mm, 20pcs
- Adhesive tape: 1"x5yards, 1pc
- Elastic bandage: 5cm x 4.5m, stretched, 1pc
- Eye pad: 8cm x 6cm, 1pc
- Alcohol prep pad: 8pcs
- Antiseptic prep pad: 4rolls
- Tweezer: 12.5cm length, 1pc
- Booklet: 1pc
- Cotton wool: 10gram 1pc
- Gauze swab: 4" x 4", 2pcs
- Gauze bandage: 5cm x 5m, 1roll
- Triangular bandage: 96cm x 96cm x 135cm, 1pc
- Scissor: 1pc
- Can add reflective vest, torch and customize logo on bag.



FIRE EQUIPMENT

Fire equipment is essential for fire safety and protection. It includes various tools and gear used by firefighters to combat fires and ensure the safety of lives and property.



Fire Suit

Standard: EN469
Navy blue, yellow, Khaki, Orange
Nomex 200g/m2, 3M reflective tape and FR viscose



Fire Helmet

Standard: EN443, EN166



Fire Goggle



Fire Gloves



Standard: EN659

Fire Boots



Standard: EN345-2

Fire Hood



Aramid, FR Viscose
Standard: EN13911

Fire Blanket



1.2Mx1.8M:
1.2Mx1.2M

HARDWARE

Hardware is essential for construction and maintenance work. It includes various tools and equipment used to build and repair structures and infrastructure.



Ratchet Wrench

Size: 6mm-32mm



Multi-function Wrench

- Ratcheting action
- Reversible function
- Adjustable sizes from 6.5-22mm
- For square and hex head screws, hooks, wing nuts, etc.



HARDWARE



PAT.



Black

12, 13, 19, 21mm

8, 10, 14, 17mm



Chrome plated

8-in-1 Multi Wrench

- Ratcheting action
- Reversible function
- 8 sizes in one wrench
- 8-10-12-13-14-17-19-21mm
- Exceed DIN standard

Tape Measure

Popular Size: 3M, 5M, 7.5M.



HARDWARE

Angle Grinder

Voltage/Frequency: 220-240V/50Hz-60Hz

Slim body and long handle design for operating easily



700220/230V/50Hz

1050W, 1100r/min, wheel dia 100/115/125mm



600220/230V/50Hz

750-950W, 1100r/min, wheel dia 110/115/125mm



2500W, 6600r/min,

wheel dia 230mm



850W, 1100r/min,

wheel dia 100/115/125mm



1200W, 10000r/min,

wheel dia 100/115/125mm

Chain Saw

Displacement: 52cc 2-Stroke

Fuel: gasoline 25 two cycle oil 1

Fuel Tank: 550ml

Oil Tank: 260ml

Power: 2.0kw/8000rpm

Saw Chain: 0.325"

Standard Bar type size: 20inch

Weight: 7.5/6.5KGS

1PC/ 50x25x30cm



METAL BOX

Metallboxen für den Arbeitsplatz
 Metallboxen für den Arbeitsplatz

Office/School storage locker Cabinet



1000x500x2000



1000x500x1800



1000x500x1800



1000x500x1800

METAL BOX

Metallboxen für den Arbeitsplatz
 Metallboxen für den Arbeitsplatz



1000x500x1800



1000x500x1800



1000x500x1800



1000x500x1800




1000x500x1800






Scaffolding Net

Material: 100% HDPE, 30-300gsm
 One piece Size: 1.83x5.1M, 1.8x6M or as required
 Color: Green/Blue/Orange
 Four sides with rope edge and aluminum eyelets.

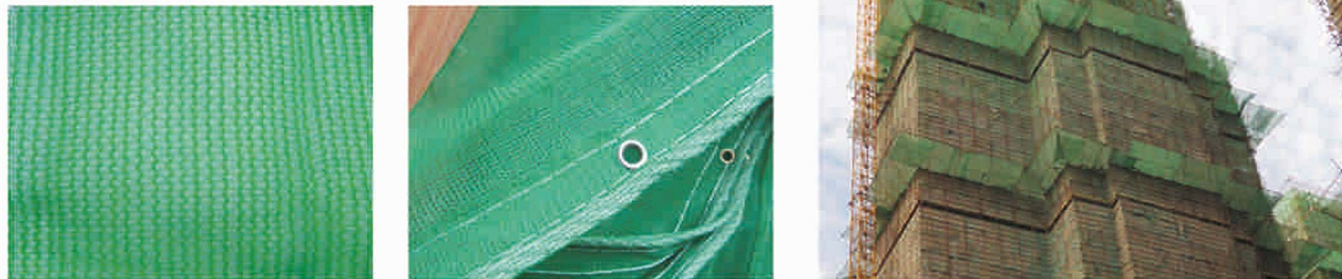

Construction Safety Net

Material: PP High-strength thread
 A: Big eyes safety flat mesh
 Mesh Density: 8-10cm x 8-10cm
 B: Small eyes safety flat mesh
 Mesh Density: 3cm x 3cm
 Size: 3Mx6M/piece

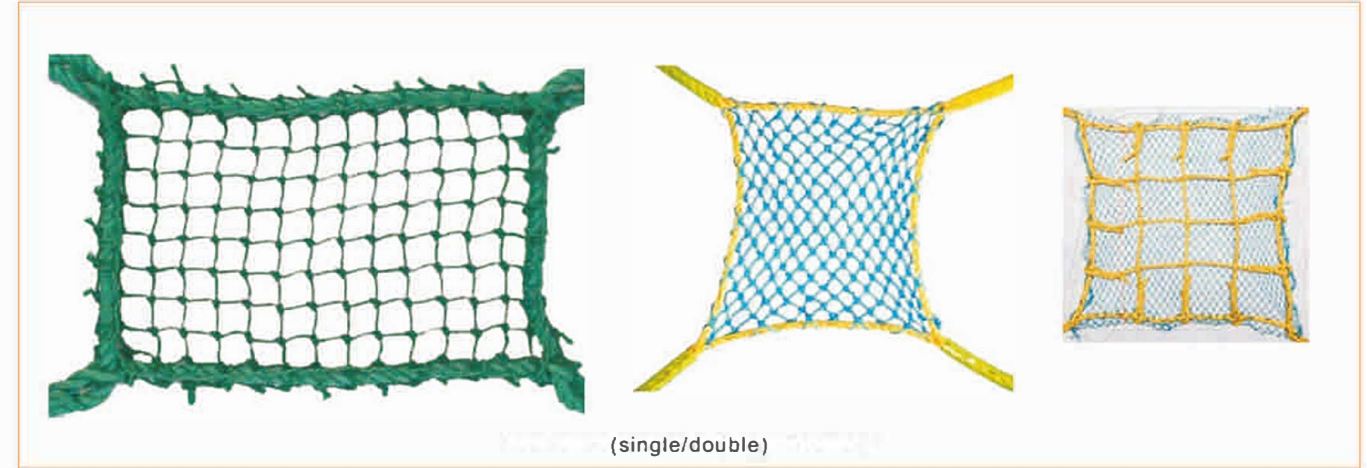

(single/double)

Fall Arrestor Anchorage with line

Material: 100% HDPE, 30-300gsm
 One piece Size: 1.83x5.1M, 1.8x6M or as required
 Color: Green/Blue/Orange
 Four sides with rope edge and aluminum eyelets.



RL022
 Automatic Rope Grab Device
 Rope capacity: 20mm
 Connector: Type A safety hook
 Used for fall arrest equipment
 CE EN353-2



Polyester 2000D, diam 16-30mm (capacity 3.5-5T) Line length 100M, End with hook



Safety lifeline Rope

Polyester 2000D, diam 15-35mm (capacity 1-10T)
Line length 30M, 50M, 100M
Ends Hook: 2x20cm (forged)



Retractable Fall Arrestor



5mm wire, capacity 300KGS, (with energy absorb);
two forged hook/rings, 15M length lanyard



Binding Wire

Material: Iron wire, carbon steel wire
10/12/16/20 Gauge Black annealed &MS,
20/21/22 Gauge & GI
10KG, 25KG or 50Kg per roll



Rebar Cap



10-22mm
Material: PP
16g/pc



Cutting Disk / Grinding Wheel

Material: Alumina/Zirconia

Grinding/cutting on non ferrous aluminum copper, metal, stainless steel, ally steel, chilled steel, tool steel, cast iron and rust..

100x4x16mm; 100x6x16mm; 115x4x22mm;

115 (125/150/180/230) x6x22mm;

115x1.6x22.2mm ; 125x1.0x22.2mm; 230x1.9x22.2mm ;



(Flap disc)

Masking Tape



Width: 25mm(1'')/50mm(2'')

Length: 20yard / 25 yard/ 50Meter

Thickness 145mic, 60 °C

Shoulder Pad



Surface Cow leather, hard sponge cushion padding

Marine Plywood

Size: 1220x2440, brown/black film

Thickness: 12mm, 16mm, 18mm, 20mm,25mm

