

Les Nouveautés LED



Janvier 2025

YOUR SMART **G**LOBAL **P**ROUREMENT & **S**OURCING PARTNER


Avec plus de 27 ans d'expérience, GPS Monaco Group est votre Allié de Confiance en matière de Sourcing et d'Approvisionnement International.

NOS AVANTAGES



Excellence à Votre Service

Nous nous efforçons constamment de dépasser les attentes de nos clients en leur offrant des solutions et des services de premier ordre.



Approche Sur Mesure

Notre approche centrée sur le client vous fournit des solutions sur mesure pour vos besoins uniques.



Présence Internationale

Depuis nos bureaux à Monaco, France, Suisse, Asie et Arabie Saoudite, nous sécurisons vos achats de l'usine à vos entrepôts.


Plus de
60
Millions
de Produits Importés.

+1700
Usines Auditées.

series LED UFO High-Bay




3 CCT SELECTABLE



| Power (W) | Input Voltage (V) | CRI | Efficacy (lm/w) | CCT (K) | Dimension (mm) D*H*H1 |
|-----------|-------------------|-----|-----------------|-----------|-----------------------|
| 100 | 220-240 / 100-277 | 80 | 100 | 2700-6500 | 235*32*68 |
| 150 | | | | | 277*32*68 |
| 200 | | | | | 308*32*68 |

series LED UFO High-Bay



| Power (W) | Input Voltage (V) | CRI | Efficacy (lm/w) | CCT (K) | Dimension (mm) D*H1*H2 |
|-----------|-------------------|-----|-----------------|-----------|------------------------|
| 100 | 220-240 / 100-277 | 80 | 100 | 2700-6500 | 235*32*68 |
| 150 | | | | | 277*32*68 |
| 200 | | | | | 308*32*68 |



series LED UFO High-Bay



180
LUMENS/WATT

5
YEARS
WARRANTY

PLUG & PLAY SYSTEM




| Power (W) | Input Voltage (V) | CRI | Efficacy (lm/w) | CCT (K) | Dimension (mm) D*H*H1 |
|-----------|-------------------|-----|-----------------|-----------|-----------------------|
| 100 | 220-240 / 100-277 | 80 | 140/160/180 | 2700-6500 | 244*105*142 |
| 150 | | | | | 286*105*142 |
| 200 | | | | | 326*105*142 |

series LED Linear High-Bay


180
LUMENS/WATT

5
YEARS
WARRANTY*



| Power (W) | Input Voltage (V) | CRI | Efficacy (lm/w) | CCT (K) | Dimension (mm) L*W*H |
|-----------|-------------------------|-----|-----------------|-----------|----------------------|
| 50 | 220-240 / 100-277 | 80 | 140/160/180 | 2700-6500 | 275*103.5*73.5 |
| 100 | | | | | 530*103.5*73.5 |
| 150 | | | | | 790*103.5*73.5 |
| 200 | | | | | 1045*103.5*73.5 |

series LED Linear High-Bay

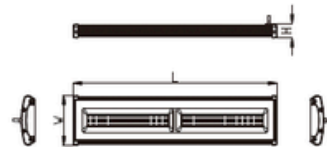

| Power (W) | Input Voltage (V) | CRI | Efficacy (lm/w) | CCT (K) | Dimension (mm) L*W*H |
|-----------|-------------------------|-----|-----------------|-----------|----------------------|
| 50 | 220-240 / 100-277 | 80 | 100 | 2700-6500 | 241*120*35 |
| 100 | | | | | 491*120*35 |
| 150 | | | | | 741*120*35 |
| 200 | | | | | 991*120*35 |


| Picture | Watt (w) | Size (mm) | Cut-out (mm) | Color | Material | Voltage | Color Temp. (K) | CRI | PF | Beam Angle | IP |
|--|----------|-----------|--------------|-------------|----------|----------|-----------------|-------|-----|------------------|----|
|  | 12W | Φ120 | Φ95 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,5 | 24°/45°/60°/100° | 65 |
| | 18W | Φ140 | Φ125 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,9 | 24°/45°/60°/100° | 65 |
| | 24W | Φ175 | Φ150 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,9 | 24°/45°/60°/100° | 65 |
| | 40W | Φ220 | Φ200 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,9 | 24°/45°/60°/100° | 65 |
|  | 12W | Φ120 | Φ95 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,5 | 24°/45°/60°/100° | 65 |
| | 18W | Φ140 | Φ125 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,9 | 24°/45°/60°/100° | 65 |
| | 24W | Φ175 | Φ150 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,9 | 24°/45°/60°/100° | 65 |
| | 40W | Φ220 | Φ200 | white/black | AL+PC | 200-240V | 3000/4000/6000K | 80/90 | 0,9 | 24°/45°/60°/100° | 65 |

DOWNLIHGT WITH MODULAR DESIGN





| | |
|--------------------------------|---|
| Color Temperature(CCT) | 3500K (Warm White) |
| Warranty(Year) | 3-Year |
| Power Supply | AC |
| Application | outdoor |
| Lamp Body Material | aluminum alloy |
| Input Voltage(V) | AC85-268 |
| Lamp Luminous Efficiency(lm/w) | 80 |
| Color Rendering Index(Ra) | 90 |
| Feature | water proof |
| Installation | Wall Mount, Surface Mounted |
| Use | Outdoor |
| Voltage | 220V |
| Base Material | Aluminum |
| Diffuser | Tempered Glass |
| Light Source | LED |
| Shape | / |
| Support Dimmer | NO |
| Material | Aluminum |
| Beam Angle | / |
| Lifespan (hours) | 50000 |
| Product Weight (kg) | 1 |
| Product name | Led Wall Lamp |
| Size | L272*W100*H95mm |
| Power | LED 12W COB |
| Application | Outdoor/ Indoor/ Residence |
| IP Rating | IP54 |
| Style | Modern |
| Keyword | Outdoor Decorative Led Wall Light |
| Usage | Outdoors Patio Pathway Landscape Garden |
| Material | Aluminium Die-casting Body |
| Installation | Surface Wall Mounted Wall Light |

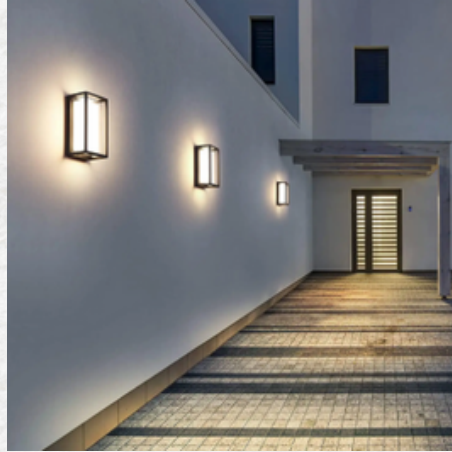

| | |
|--------------------------------|-----------------------------------|
| Color Temperature(CCT) | 5CCT |
| Warranty(Year) | 3-Year |
| Power Supply | Include |
| Input Voltage(V) | 100-277V |
| Lamp Luminous Efficiency(lm/w) | 60 |
| Color Rendering Index(Ra) | 80 |
| Use | Garden |
| Voltage | 100-277V |
| Base Material | Aluminum |
| Diffuser | Polycarbonate |
| Light Source | LED |
| Support Dimmer | NO |
| Lifespan (hours) | 50000 |
| Product Weight (kg) | 1.81 |
| IP Rating | 65 |
| Color | 5CCT Selectable |
| Product name | Led Wall Light |
| Application | Outdoor Courtyard |
| Keyword | Outdoor Decorative Led Wall Light |
| Material | Aluminum+PC |
| Installation | Wall Mounted Directly |
| Color Temperature(CCT) | 2200K/2700K/3000K/4000K/5000K |
| Type | Outdoor Lighting Products |
| Style | Morden |

SWITCH EFFECT DEMONSTRATION



☐ Turn off the light

☑ Turn on the light


IP65 WATERPROOF LAMP BODY

The lamp body is waterproof and corrosion-resistant, combining both aesthetics and practical value




PP LAMP BODY STRONG HEAT DISSIPATION

Selected PP materials to protect the life of the lamp beads

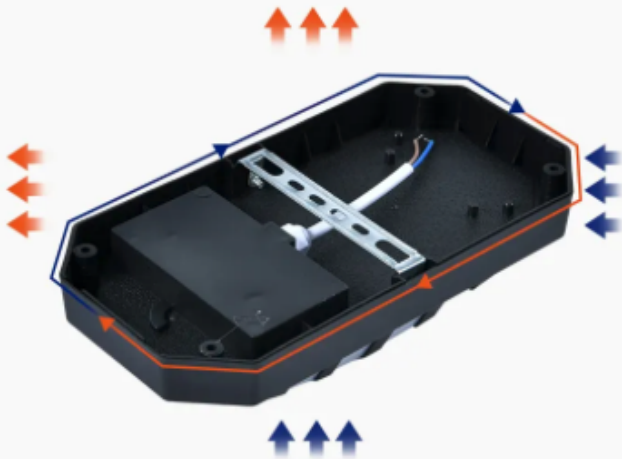

CCC BIS CE RoHS ISO

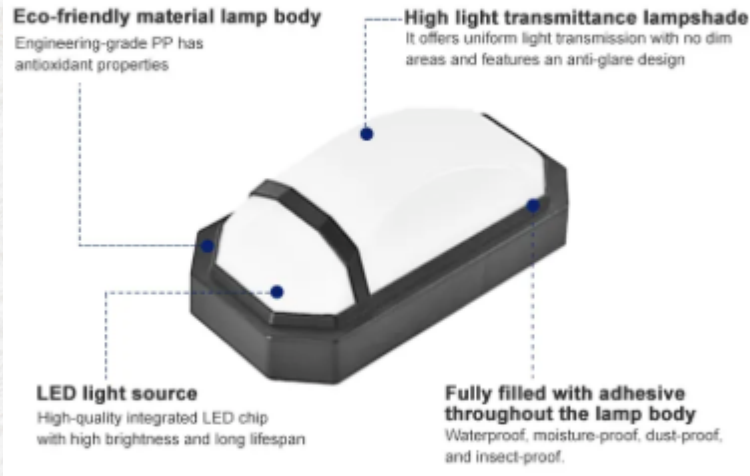

| | |
|--------------------------------|-------------------------------|
| Color Temperature(CCT) | 3000K |
| Warranty(Year) | 2-Year |
| Power Supply | Energy saving |
| Input Voltage(V) | 110-265V |
| Lamp Luminous Efficiency(lm/w) | 100 |
| Color Rendering Index(Ra) | 95 |
| Use | Garden |
| Base Material | Aluminum |
| Diffuser | Tempered Glass |
| Light Source | LED |
| Support Dimmer | NO |
| Lifespan (hours) | 50000 |
| Product name | Waterproof Outdoor Wall Light |
| Beam angle | 360 Degree |
| Lamp Chip | High Power Chip |
| Driver | 110-265V / waterproof |
| Certification | CCC,CE,BV,EMC,CB |



- With metal tool inside
- Multi-function : camping light or flashlight
- Two type appearance for your choose
- Different color
- TYPE C
- SOS, suitable for outdoor using





Patrick Bogaerts
Fondateur, CEO

Contact

Téléphone : +33 6 07 93 79 98

Email : Patrick@GPSMonacoGroup.com

Site Web : <https://GPSMonacoGroup.com>