

Mini Fridges Catalog





THERMOELECTRIC COOLER AND WARMER



◆ Power consumption

	AC230 V	DC12V
Cold	42W	38W
Warm	36W	32W

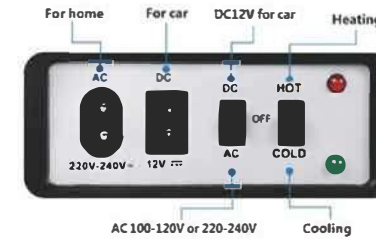


Specification			
Main Material	PP & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	1.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Small and portable. Modern and exquisite outlook. Can be put in any place you need it.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28 × D22.5 × H30.5 CM	3ly Gift Box	W27.6× D21.8 × H29.8CM
		Carton Size	W57.5× D45.5 × H31.5CM
Gift Box N.W. / G.W.	1.5/1.8KGS	Carton N.W. / G.W.	6.0/8.0KGS
20GP/ 40GP /40HQ	1515/3030/3679PCS	20GP/ 40GP /40HQ	1432/2864/3412PCS







Dimension Figure — JY-B-4L-2

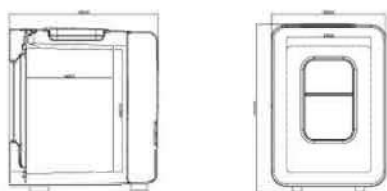

Dimension Figure — JY-D-4L-2

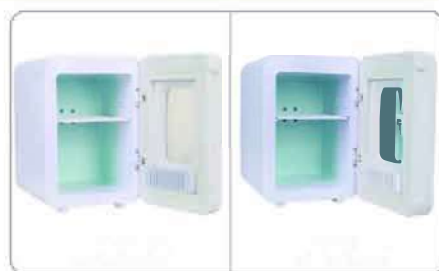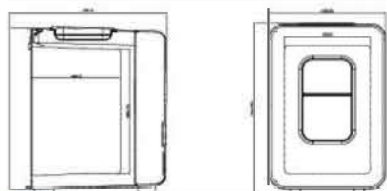


355ML
X06

◆ Power consumption

Cold	AC230V	DC12V
	42W	38W
Warm	AC230V	DC12V
	36W	32W

Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	1.5KGS	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	JY-B-4L-2: Plastic door with a window to see inside conveniently. JY-D-4L-2: Mirror door with Infinite Light and small window.		
Packaging Information			
1pcs(For online retail)		4pcs	
Carton size	W28XD22.5XH30.5CM	3ly Gift Box	W27.6XD21.8XH29.8CM
		Carton Size	W57.5xD45.5xH31.5CM
Gift Box N.W./G.W.	1.5/1.8KGS	Carton N.W./G.W.	6.0/8.0KGS
20GP/40GP/40HQ	1515/3030/3679PCS	20GP/40GP/40HQ	1432/2864/3412PCS

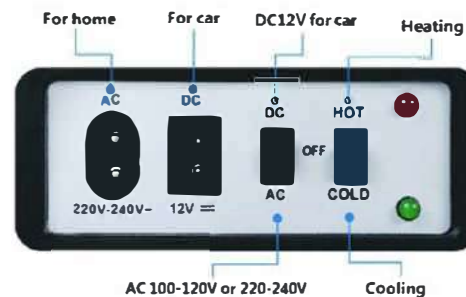

THERMOELECTRIC COOLER AND WARMER





Glass Door





Power consumption

	AC230 V	DC12V
Cold	42W	38W
Warm	36W	32W

355ML
X06

Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	1.8KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Small and portable. With the glass door. Elegant design and high performance.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.5 × D22.5 × H30.5 CM	3ly Gift Box	W28.2 × D21.8 × H29.8CM
Gift Box N.W. / G.W.	1.8/2.2KGS	Carton Size	W58 × D45.5 × H31.5CM
		Carton N.W. / G.W.	7.2/9.2KGS
20GP/ 40GP /40HQ	1488/2976/3615PCS	20GP/ 40GP /40HQ	1408/2816/3356PCS

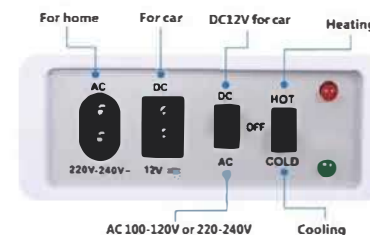





◆ Power consumption

355ML X06	Cold	AC230 V	DC12V
		42W	38W
	Warm	AC230 V	DC12V
		36W	32W



Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	1.8KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Innovative design. With mirror and LED light. Attractive outlook appeals to a wide range of consumers.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.5 × D22.5 × H30.5 CM	3ly Gift Box	W28.2 × D21.8 × H29.8CM
		Carton Size	W58 × D45.5 × H31.5CM
Gift Box N.W. / G.W.	1.8/2.2KGS	Carton N.W. / G.W.	7.2/9.2KGS
20GP/ 40GP /40HQ	1488/2976/3615PCS	20GP/ 40GP /40HQ	1408/2816/3356PCS


THERMOELECTRIC COOLER
AND WARMER

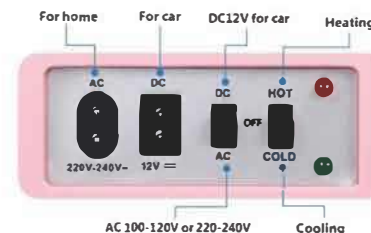



Power consumption

	AC230 V	DC12V
Cold	44W	36W
Warm	40W	32W



Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	2.2KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Retro design, little and dainty appearance, and light weight. A hole handle on top, easy to carry.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.5 × D22 × H32 CM	3ly Gift Box	W27.6 × D21 × H30.8 CM
		Carton Size	W57.2 × D44 × H32.5 CM
Gift Box N.W. / G.W.	2.2/3KGS	Carton N.W. / G.W.	10.5/11.5KGS
20GP/40GP/40HQ	1479/2958/3500PCS	20GP/40GP/40HQ	1420/2950/3318PCS





With plastic door



With glass door



With glass door and display control





With mirror door and LED light



With mirror door and with LED light and display control

Dimension Figure

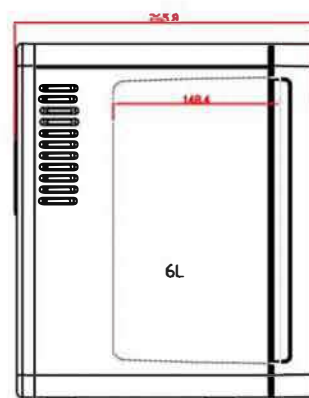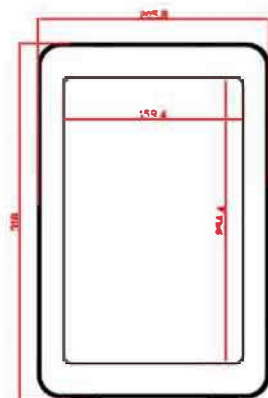

JY-B-6L



Power consumption

Cold	AC230V	DC12V
	60W	42W
Warm	AC230V	DC12V
	55W	38W

Specification

Main Material	ABS & Aluminum	Cooling Capacity	18°C-20°C below ambient temperature
Insulation	PU foam	Heating Capacity	55°C ±5°C by set-point thermostat
Product Weight	3.2kg	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	JY-B-6L: Keep 8 cans. with 2 shelves and a side basket. with normal glass door in polish color. JY-C-6L: With the glass door and with the LED digital display. JY-D-6L: With mirror and LED light. JY-E-6L: With mirror and LED light and LED digital display. JY-F-6L: normal plastic door		

Packaging Information

	1pcs(For online retail)	4pcs	
Carton size	W31×D25.5×H37CM	3ly Gift Box	W31×D25.5×H37CM
Gift Box N.W./G.W.	3.2/3.8KGS	Carton Size	W64×D52×H39CM
20GP/40GP/40HQ	991/2015/2350PCS	Carton N.W./G.W.	13.0/15.0KGS
		20GP/40GP/40HQ	892/1784/2124PCS

NINGBO JIAYUAN ELECTRONIC CO.,LTD.

TEL: +86-574-62003183

WWW.CN-JIAYUAN.COM / WWW.ELECTRONIC-CHINA.COM

TEL: +86-574-62003183

NO.105, Ningbo Road, Ningbo City, Zhejiang Province, China 315000

THERMOELECTRIC COOLER AND WARMER



Specification			
Main Material	ABS and Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	2.7KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The front door is installed with two parts. The upper part is Wavy desgin, it can be in silver spray painting or chromium decorated		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W28.9 × D22.2 × H32.2 CM	3ly Gift Box	W 28.9 × D22.2 × H32.2 CM
Gift Box N.W. / G.W.	2.7/3.3KGS	Carton Size	W61 × D45.5 × H34 CM
		Carton N.W. / G.W.	11.0/12.0KGS
20GP/ 40GP /40HQ	1398/2796/3339PCS	20GP/ 40GP /40HQ	1228/2500/2900PCS





THERMOELECTRIC COOLER AND WARMER



Specification			
Main Material	ABS and Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid & PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	2.6KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Retro design. With wavy design front door. A handle on top. easy to carry.		
Packaging Information			
1pcs (For online retail)		4pcs	
Carton size	W30.5 × D23.5 × H35.5 CM	3ly Gift Box	W30.3 × D23.7 × H35 CM
Gift Box N.W. / G.W.	2.6/3.2KGS	Carton Size	W62.5 × D49 × H36.5 CM
20GP/ 40GP /40HQ	1125/2250/2711PCS	Carton N.W. / G.W.	12.0/14.0GS
		20GP/ 40GP /40HQ	1068/2180/2548PCS



THERMOELECTRIC COOLER AND WARMER

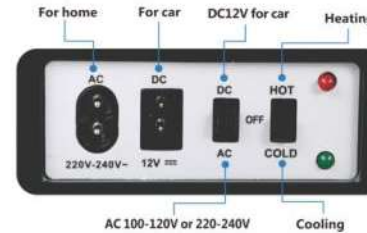

Power consumption

	AC230 V	DC12V
Cold	52W	40W
Warm	45W	36W

Stabilize the activity of skin care products

Keep cosmetics fresh



Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	3.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Attractive outlook and practical function. With two movable shelves. Can store everything you want.		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W35.5 × D27.5 × H37.8 CM	3ly Gift Box	W35.0 × D27.0 × H37.2CM
		Carton Size	W55.5 × D36.5 × H39CM
Gift Box N.W. / G.W.	3.0/3.4KGS	Carton N.W. / G.W.	6.0/8.0KGS
20GP/ 40GP /40HQ	790/1636/1938PCS	20GP/ 40GP /40HQ	726/1412/1730PCS





Glass Door





DIY Writing Put Favorite labels Scratch Resistant Easy to wipe

Power consumption

	AC230V	DC12V
Cold	52W	40W
Warm	45W	36W

Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	3.6KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With the glass door and larger capacity than JY-C-4L. The glass door also can be the white board. Suitable for car, room, office and anywhere.		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W36× D27.5 × H37.8CM	3ly Gift Box	W35.5 × D27 × H37.2CM
Gift Box N.W. / G.W.	3.6/4.2KGS	Carton Size	W55.5 × D37 × H39CM
20GP/ 40GP /40HQ	774/1576/1843	Carton N.W. / G.W.	7.2/9.2KGS
		20GP/ 40GP /40HQ	716/1432/1706PCS

THERMOELECTRIC COOLER AND WARMER

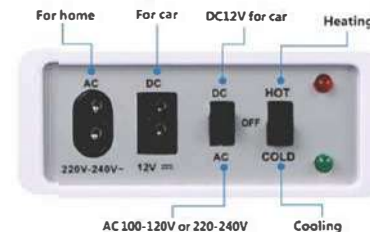



Intelligent LED Display on Glass Door



Power consumption


	AC230V	DC12V
Cold	52W	40W
Warm	45W	36W

DIY Writing Put Favorite labels Scratch Resistant Easy to wipe



Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	3.6KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With the glass door and with the LED digital display. The inside temperature can be read at glance. And can set the temperature.		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W36 × D27.5 × H37.8CM	3ly Gift Box	W35.5 × D27 × H37.2CM
Gift Box N.W. / G.W.	3.6/4.2KGS	Carton Size	W55.5 × D37 × H39CM
20GP/ 40GP/ 40HQ	774/1578/1843PCS	Carton N.W. / G.W.	7.2/9.2KGS
		20GP/ 40GP/ 40HQ	716/1432/1706PCS



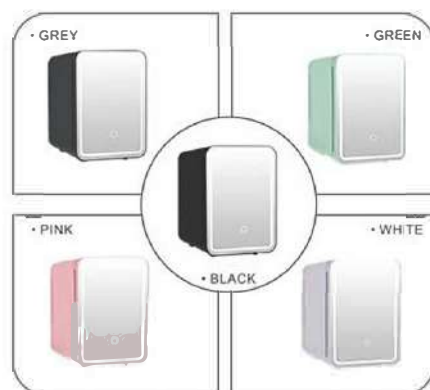



◆ Power consumption

	AC230V	DC12V
Cold	52W	40W
Warm	45W	36W

355ML X15
500ML X07

Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	Poly foam lid/PU foam body	Heating Capacity	55°C ± 5°C by set-point thermostat
Product Weight	3.6KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With mirror and LED light. The brightness can adjust. Stylish outlook and good performance. Can be put in any place you need it.		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W36 × D27.5 × H37.8CM	3ly Gift Box	W35.5 × D27 × H37.2CM
Gift Box N.W. / G.W.	3.6/4.2KGS	Carton Size	W55.5 × D37 × H39CM
20GP/ 40GP /40HQ	774/1576/1843PCS	Carton N.W. / G.W.	7.2/9.2KGS
		20GP/ 40GP /40HQ	716/1432/1706PCS

THERMOELECTRIC COOLER AND WARMER

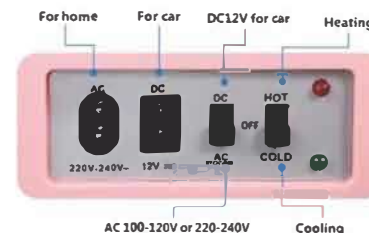

Stabilize the activity of skin care products

Keep cosmetics fresh



The Magic Mirror with Built-in LED lights

Brings up a 3D lighting effect
Helping to create a delicate makeup

Soft fill light design

Illuminating every inch of your skin

Short press button to turn ON/OFF
Long press button to adjust the brightness at will



15L Series-Single cooling system 15L



With plastic door



With glass door



With glass door and display control



With mirror door and LED light




With mirror door and with LED light and display control

Dimension Figure
JY-B-15L



Dimension Figure
JY-C-15L, JY-D-15L, JY-E-15L, JY-F-15L

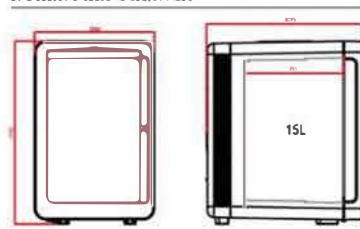

◆ Power consumption

Cold	AC230V	DC12V
	60W	45W
Warm	AC230V	DC12V
	55W	40W



Specification

Main Material	ABS & Aluminum	Cooling Capacity	18℃-20℃ below ambient temperature
Insulation	PU foam	Heating Capacity	55℃±5℃ by set-point thermostat
Product Weight	5.0KGS	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	JY-B-15L:ABS plastic door, adjustable shelf adjust spacing according to your needs. JY-C-15L:With normal glass door. JY-D-15L:With the glass door and with the LED digital display. JY-E-15L:With mirror and LED light. The brightness can adjust. JY-F-15L:With mirror and LED light and LED digital display.		

Packaging Information

1pcs(For online retail)		2pcs	
Carton size	W40XD32XH45CM	3ly Gift Box	W40× D32× H45cm
Gift Box N.W./G.W.	5.5/6.5KGS	Carton Size	W64× D42× H47cm
20GP/40GP/40HQ	500/1000/1190PCS	Carton N.W./G.W.	11.0KGS/13.0KGS
		20GP/40GP/40HQ	458PCS/916PCS/1092PCS

NINGBO JIAYUAN ELECTRONIC CO.,LTD.

Address: Ningbo Jiyuan Electronic Co., Ltd.

Address: Ningbo Jiyuan Electronic Co., Ltd.

Website: www.jiayuan.com.cn

Address: Ningbo Jiyuan Electronic Co., Ltd.

15L Series-Double Cooling System 15L



With plastic door



With glass door



With glass door and display control



With mirror door and LED light




With mirror door and with LED light and display control

Dimension Figure
JY-BS-15L



Dimension Figure
JY-CS-15L, JY-DS-15L, JY-ES-15L, JY-FS-15L

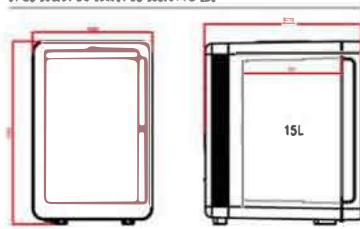

◆ Power consumption

Cold	AC230V	DC12V
	75W	60W
Warm	AC230V	DC12V
	60W	50W



Specification

Main Material	ABS & Aluminum	Cooling Capacity	23℃-28℃ below ambient temperature
Insulation	PU foam	Heating Capacity	55℃ ±5℃ by set-point thermostat
Product Weight	5.0KGS	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	JY-BS-15L:ABS plastic door, adjustable shelf adjust spacing according to your needs. JY-CS-15L:With normal glass door. JY-DS-15L:With the glass door and with the LED digital display. JY-ES-15L:With mirror and LED light. The brightness can adjust. JY-FS-15L:With mirror and LED light and LED digital display.		

Packaging Information

1pcs(For online retail)		2pcs	
Carton size	W40XD32XH45CM	3ly Gift Box	W40× D32× H45cm
Gift Box N.W./G.W.	5.5/6.5KGS	Carton Size	W64× D42× H47cm
20GP/40GP/40HQ	500/1000/1190PCS	Carton N.W./G.W.	11.0KGS/13.0KGS
		20GP/40GP/40HQ	458PCS/916PCS/1092PCS


NINGBO JIAYUAN ELECTRONIC CO.,LTD.

TEL: +86 574 62102115

MO: +86 158 57462115

Q: www.cnjiayuan.com, www.enjiayuan.net

F: No.155, Ningbo Road, Lishan Town, Ningbo, Zhejiang, China 315400

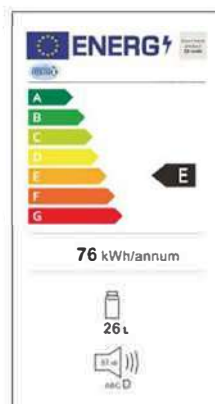


Power consumption

Cooling	AC220V	DC12V
	78W	57W
Warm	AC220V	DC12V
	63W	47W


Specification			
Main Material	ABS & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Such mini fridge combine powerful thermoelectric technology with cool elegance and are light weight, compact and portable. Adjustable shelf adjust spacing according to your needs. Made by ABS plastics, anti-seismic.		
Packaging Information			
1pcs (For online retail)		2pcs	
Carton size	W39.5 × D26.5 × H46.5CM	3ly Gift Box	W39.5 × D29.5 × H46.5CM
		Carton Size	W61.0 × D41.5 × H48.5CM
Gift Box N.W. / G.W.	5.0/6.0KGS	Carton N.W. / G.W.	10.0/12.0KGS
20GP/ 40GP 40HQ	530/1060/1270PCS	20GP/ 40GP 40HQ	480/1000/1140PCS

THERMOELECTRIC COOLER AND WARMER

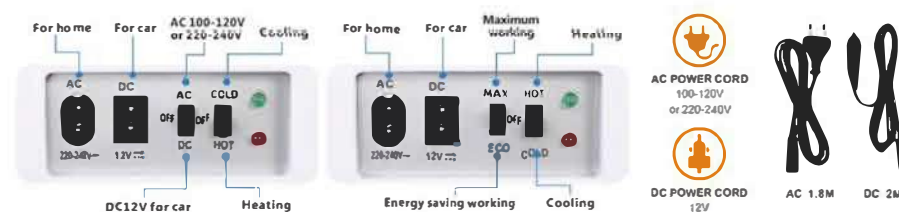




Dimension Figure

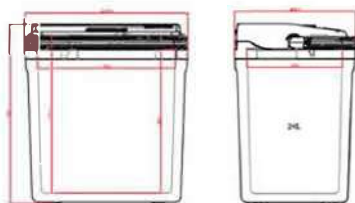

Power consumption

Cold	AC230V	DC12V
	55W	45W
Warm	AC230V	DC12V
	50W	40W

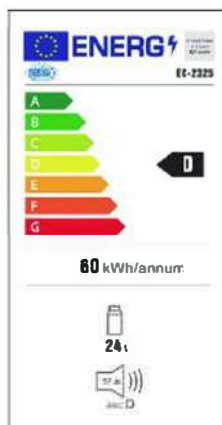

Specification			
Main Material	PP	Cooling Capacity	max 18 ℃ below ambient temperature
Insulation	Poly foam Lid and PU foam body	Heating Capacity	50 ℃ ± 5 ℃ by set-point thermostat
Product Weight	4.5KGS	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	EC-2325-A:New design, Energy class D with excellent cooling performance. EC-2325-B:With LED display-optional.		
Packaging Information			
	1pcs		2pcs
Carton size	W42XD31XH40.5CM	3ly Gift Box	W42XD31XH40.5CM
		Carton Size	W63xD43.5xH42.5CM
Gift Box N.W./G.W.	4.7/5.3KGS	Carton N.W./G.W.	9.5/11.5KGS
20GP/40GP/40HQ	540/1080/1308PCS	20GP/40GP/40HQ	496/1012/1118PCS



THERMOELECTRIC COOLER AND WARMER



AC POWER CORD
100-120V
or 220-240V





DC POWER CORD
12V





Dimension Figure

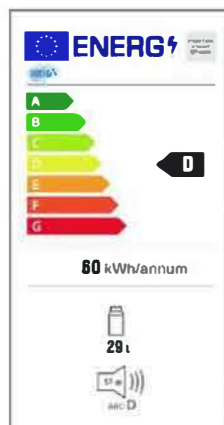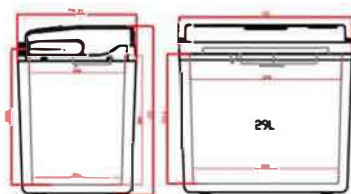

Power consumption

	Cold	AC230V	DC12V
		55W	45W
	Warm	AC230V	DC12V
		50W	40W

Specification			
Main Material	PP	Cooling Capacity	max 18 ℃ below ambient temperature
Insulation	Poly foam Lid and PU foam body	Heating Capacity	50 ℃ ± 5 ℃ by set-point thermostat
Product Weight	5.5KGS	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	EC-2430-A:New design, Energy class D with excellent cooling performance. EC-2430-B:With LED display-optional.		
Packaging Information			
	1pcs		2pcs
Carton size	W43.8xD30.5xH43CM	3ly Gift Box	W43.8xD30.5xH43CM
		Carton Size	W62XD45.5XH45CM
Gift Box N.W./G.W.	5.5/6.5KGS	Carton N.W./G.W.	10.0/12.0KGS
20GP/40GP/40HQ	504/1008/1200PCS	20GP/40GP/40HQ	456/912/1086PCS



THERMOELECTRIC COOLER
AND WARMER



AC POWER CORD
100-120V
or 220-240V



DC POWER CORD
12V







THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	55W	47W
Warm	45W	40W

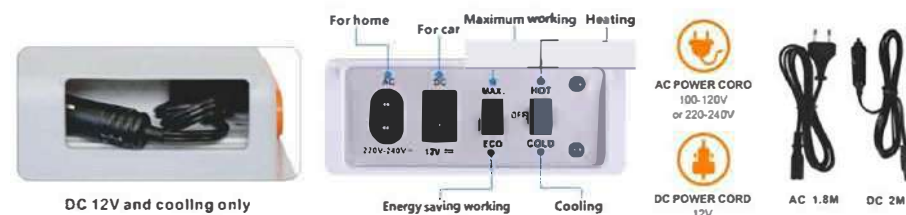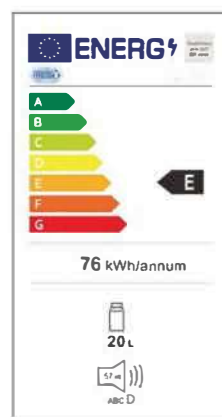

Specification			
Main Material	PP	Cooling Capacity	15℃ ± 3℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	3.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Light weight for easy carrying. Economical version in high performance at low price.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W39×D25.5×H42CM	3ly Gift Box	W39×D25.5×H42CM
Gift Box N.W. / G.W.	3.0/4.0KGS	Carton Size	W52.5×D40.5×H43.5CM
		Carton N.W. / G.W.	6.0/7.7KGS
20GP/ 40GP /40HQ	740/1480/1670PCS	20GP/ 40GP /40HQ	688/1376/1532PCS





THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	61W	53W
Warm	48W	41W

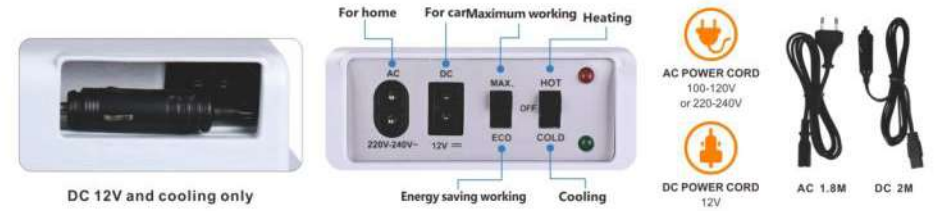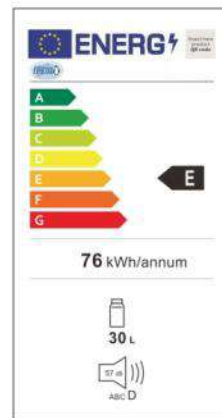

Specification			
Main Material	PP	Cooling Capacity	15°C ± 3°C below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	50°C ± 5°C by set-point thermostat
Product Weight	5.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Economical and simple version. With large size, strong handle for carry, light weight and portable		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W43.3×D29.8×H42CM	3ly Gift Box	W43.3 ×D29.8×H42CM
		Carton Size	W61.5×D45CM×H44CM
Gift Box N.W. / G.W.	5.0/5.5KGS	Carton N.W. / G.W.	10.0/12.0KGS
20GP/ 40GP /40HQ	520/1040/1250PCS	20GP/ 40GP /40HQ	476/964/1122PCS





◆ Power consumption



	Cold	AC230V	DC12V
MAX	60W	50W	
ECO	10W	50W	
Warm	AC230V	DC12V	
MAX	56W	41W	
ECO	56W	41W	


WITH TWIN-TOP LID (OPTIONAL)



Specification			
Main Material	PP	Cooling Capacity	15℃ ± 3℃ below ambient temperature
Insulation	Poly foam or PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	4.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The traditional appearance, simple and generous structures and cost-effective, to be the first choice of the affordable cooler.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.2×D30.6×H44.1CM	3ly Gift Box	W40.2×D30.6×H44.1CM
G ft Box N.W. / G.W.	4.0/4.5KGS	Carton Size	W62.5×D41.7×H45.5CM / 2PCS
		Carton N.W. / G.W.	8.0/10.0KGS
20GP/ 40GP /40HQ	530/1060PCS/1290PCS	20GP/ 40GP /40HQ	480/1000/1140PCS


THERMOELECTRIC COOLER AND WARMER

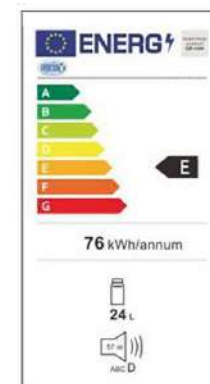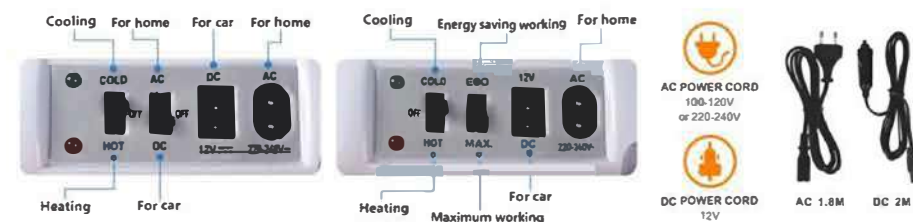




Power consumption

	AC230 V	DC12V
Cold	53W	48W
Warm	48W	45W

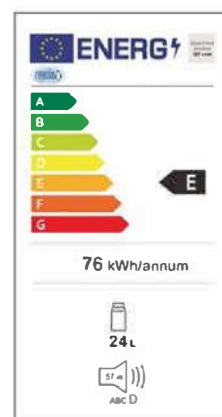

Specification			
Main Material	PP	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Modern design lid, never outdated, it's excellent function and novel appearance to let you fall in love at first sight.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.2×D30.6×H44.1cm	3ly Gift Box	W40.2×D30.6×H44.1CM
Gift Box N.W. / G.W.	4.5/5.0KGS	Carton Size	W62.5×D41.7×H45.5CM / 2PCS
20GP/ 40GP /40HQ	530/1060/1290PCS	Carton N.W. / G.W.	9.0/11.0KGS
		480/1000/1140PCS	




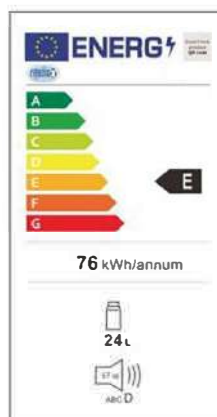


◆ Power consumption

	AC230 V	DC12V
Cold	60W	55W
Warm	50W	45W

Specification			
Main Material	PP	Cooling Capacity	18°C - 20°C below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50°C ± 5°C by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Stylish outlook and good performance. Big handle for easy carrying. To be one of your best choice.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W40.3×D30.8×H44.8CM	3ly Gift Box	W40.3×D30.8×H44.8CM
Gift Box N.W. / G.W.	4.5/5.0KGS	Carton Size	W63×D42×H46.5CM
20GP/40GP/40HQ	500/1000/1240PCS	Carton N.W. / G.W.	9.0/11.0KGS
		20GP/40GP/40HQ	460/960/1120PCS



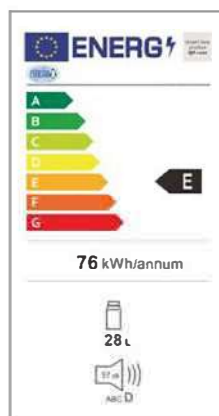


Power consumption

Cold	AC230 V	DC12V
	62W	55W
Warm	AC230 V	DC12V
	53W	48W

Specification			
Main Material	PP	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	7.0KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With a big puller and wheels for easy rolling. With a drink flask/divider. Fill the drink flask with water and freeze it in the home fridge overnight, which can be used as icepack for fast cooling effect.		
Packaging Information			
1pcs		1pcs	
5ty Gift Box With Shrink Wrapped	W45.0×D35.5×H48.0CM	3ty Gift Box	W45.0×D35.5×H48.0CM
		Carton Size	W46.5×D37×H50CM
Gift Box N.W. / G.W.	7.0/8.0KGS	Carton N.W. / G.W.	7.0/8.0KGS
20GP/ 40GP /40HQ	370/795/910PCS	20GP/ 40GP /40HQ	337/680/805PCS

THERMOELECTRIC COOLER AND WARMER



WITH BAGS (OPTIONAL)



Divider for
Separating
the stuff



The lid is
Detachable



With a drink
flask
Fill the water
flask with water
and freeze it in
the home fridge
overnight



With big
puller and
wheels for
Easy rolling






With trolley





Power consumption

	AC230V	DC12V
Cold	60W	45W
Warm	50W	42W

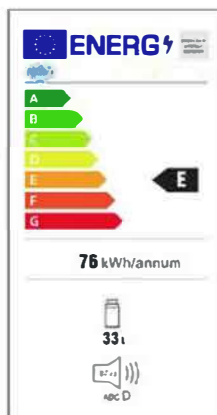

Specification			
Main Material	PP	Cooling Capacity	18℃±3℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	7.5KGS	Volyage	100-120V AC/12V DC 220-240V AC/12V DC
Features	With a big puller and wheels for easy rolling.Detachable Grid Divider to use the space inside reasonable.Big volume,also big handle for easy carrying and with a strong extension puller and wheels for rolling(Optional).		
Packaging Information			
1pcs		1pcs	
5ly Gift Box With Shrink Wrapped	W45.6XD34XH49.5CM	3ly Gift Box	W45.6XD34XH49.5CM
		Carton Size	W47.5xD35.5xH51.5CM
Gift Box N.W./G.W.	7.5/8.5KGS	Carton N.W./G.W.	7.5/8.5KGS
20GP/40GP/40HQ	360/740/865PCS	20GP/40GP/40HQ	320/670/780PCS

THERMOELECTRIC COOLER AND WARMER

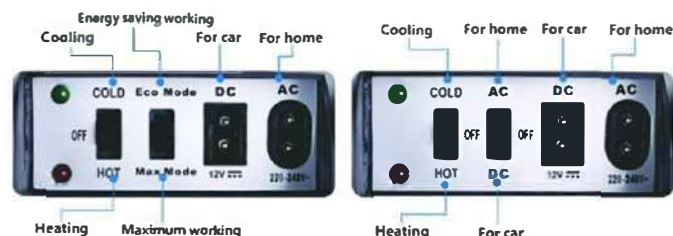

WITH TWIN-TOP LID (OPTIONAL)




Non-electric function




The lid is Detachable




With big puller and wheels for Easy rolling



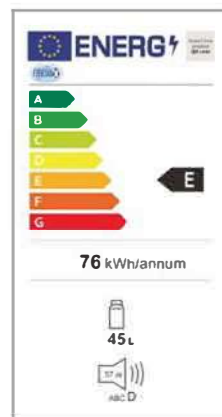

◆ Power consumption

	AC230 V	DC12V
Cold	65W	55W
Warm	55W	50W

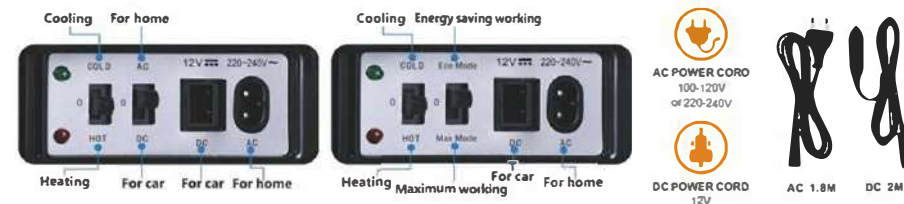

Specification			
Main Material	HDPE & PP	Cooling Capacity	15℃ ± 3℃ below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	9.0KG	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Large capacity is the best choice of the family travel. The puller and two big wheels for convenient carrying.		
Packaging Information			
5ly Gift Box With Shrink Wrapped	W60×D44×H47CM		
Gift Box N.W. / G.W.	9.0/10.5KGS		
20GP/ 40GP /40HQ	230/485/525PCS		



THERMOELECTRIC COOLER AND WARMER



Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid and PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	3.3KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Modern and exquisite outlook and light weight for easy carrying. Adjustable strap device for tying into car central console. With 2 can holders.		
Packaging Information			
	1pcs		3pcs
5ly Gift Box With Shrink Wrapped	W48×D23.3×H30.9CM	3ly Gift Box	W48×D23.3×H30.9CM
		Carton Size	W72×D49.5×H32.5CM / 3PCS
Gift Box N.W. / G.W.	3.3/3.8KGS	Carton N.W. / G.W.	10.00/11.00KGS
20GP/ 40GP /40HQ	800/1657/1942PCS	20GP/ 40GP /40HQ	768/1590/1854PCS





THERMOELECTRIC COOLER AND WARMER



Specification			
Main Material	PP & Aluminum	Cooling Capacity	18℃ - 20℃ below ambient temperature
Insulation	Poly foam lid and PU foam body	Heating Capacity	55℃ ± 5℃ by set-point thermostat
Product Weight	4.5KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	Simply fix to the front passenger seat or one of the seats in the rear using the vehicle's own seat belt. The lid can be opened in a trice with just one hand.		
Packaging Information			
1pcs		2pcs	
5ly Gift Box With Shrink Wrapped	W58 × D30.8 × H33CM	3ly Gift Box	W58 × D30.8 × H33CM
		Carton Size	W64 × D59 × H35CM / 2PCS
Gift Box N.W. / G.W.	4.5/5KGS	Carton N.W. / G.W.	9/10KGS
20GP/ 40GP /40HQ	474/983/1152PCS	20GP/ 40GP /40HQ	440/900/1050PCS




THERMOELECTRIC COOLER AND WARMER

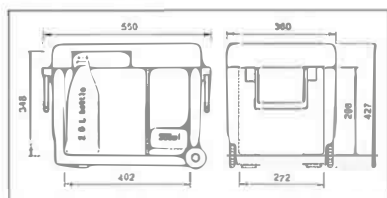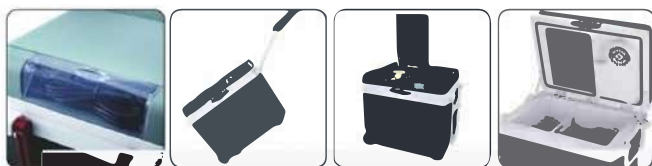

Power consumption


	AC230 V	DC12V
Cold	65W	48W
Warm	56W	44W

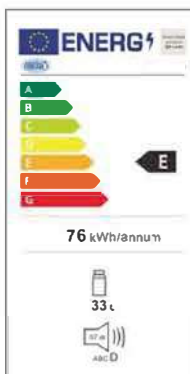

Specification			
Main Material	ABS	Cooling Capacity	15°C ± 3°C below ambient temperature
Insulation	PU(Polyurethane) foam	Heating Capacity	50°C ± 5°C by set-point thermostat
Product Weight	8.7KG	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	LED temperature display,cover in cover for saving power consumption. Multi-functional item for family travelling with the elegant box rolls effortlessly on its two sturdy wheels		
Packaging Information			
5ly Gift Box With Shrink Wrapped	W56×D39×H46.5CM		
Gift Box N.W. / G.W.	8.7/10.0KGS		
20GP/ 40GP /40HQ	290/600/687PCS		



THERMOELECTRIC COOLER AND WARMER



Power consumption

	AC230 V	DC12V
Cold	65W	55W
Warm	55W	50W



Specification			
Main Material	PP	Cooling Capacity	18℃ -20℃ below ambient temperature
Insulation	PU foam	Heating Capacity	50℃ ± 5℃ by set-point thermostat
Product Weight	5.8KGS	Voltage	100-120V AC/12V DC 220-240V AC/12V DC
Features	The modern and elegant design. Big capacity the cover lid with power cord compartment, and pull Back grip for easy turn on. The bottom case with large handle for carrying.		
Packaging Information			
1pcs		1pcs	
5ly Gift Box With Shrink Wrapped	W41.3×D33.2×H45 CM / 1PCS	3ly Gift Box	W41.3×D33.2×H45 CM / 1PCS
Gift Box N.W. / G.W.	5.8/7.1KGS	Carton Size	W41.3×D33.2×H45 CM / 1PCS
20GP/ 40GP /40HQ	460/960/1120PCS	Carton N.W. / G.W.	5.8/7.1KGS
		20GP/ 40GP /40HQ	460/960/1120PCS





Design Team



Designed by the team of Italian designer Francesco Costacurta.

2 Ways opening (left or right)



Removable lid. Both sides are accessible for opening. Left and right opening options.



Power entry with cord organiser



DC 12/24V inlet for DC cable. In the event that the display's control panel fails to function, a failsafe switch & emergency switch is provided.

Practical storage & easy cleaning



Included is a basket with a removable partition. The flush-mounted evaporator, plastic and discharge valve make for straightforward cleaning.




Hidden handle



The concealed handle can conserve space and be conveniently positioned.


Interior multi-point LED light with magnetic switch

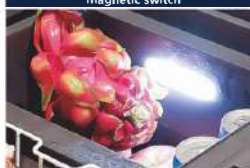

When the lid is opened or closed, the LED lights turn on or off.



-18~-22°C Seafood
-15~-18°C Ice Cream
-5~-5°C fresh meat
0~-10°C cool drink
3~-8°C Fruits and vegetables

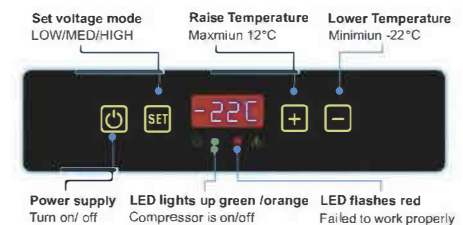


Set voltage mode LOW/MED/HIGH
Raise Temperature Maximum 12°C
Lower Temperature Minimum -22°C
Power supply Turn on/off
LED lights up green/orange Compressor is on/off
LED flashes red Failed to work properly

Keep the food fresh for more than 72 hours



45mm thick for PU foam insulation
High density 26-28kg/m³ uniform foaming

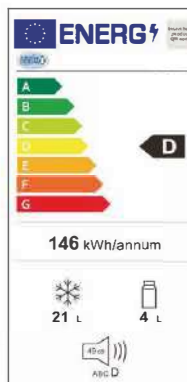

2M DC cable 12/24V
AC adaptor with 1.8M AC cable 100-240V



Max Power	DC12V 3.2A DC24V 1.6A	
Voltage	DC 12/24V with AC adaptor 100-240v	
Temperature display	LED display and control from -22°C to +12°C	
Cooling performance	-18°C to +12°C	
Storage Capacity	25L	30L
Cooling unit	EVERCOOL compressor or SECOP compressor with R1234yf or R134a	
Insulation	CFC & HCFC free PU foam, average 45mm thickness	
N.W./G.W.	11.00KGS/13.00KGS	11.50KGS/13.5KGS
Product Size	600X380X376mm	600X380X426mm
White box	63.8X41.8X44.3CM	63.8X41.8X49.3CM
Master carton	65.5X43.5X46CM	65.5X43.5X51CM
20'GP	200CS	180PCS
40'GP	418PCS	385PCS
40HQ	492PCS	453PCS





Rubber LOGO



Rubber LOGO can be customized by independent mold.

Power entry with cord organiser



DC 12/24V inlet for DC cable and AC 100-240V for AC cable. In the event that the display/control panel fails to function, a fuseswitch/Emergency switch is provided.

Strong drop down handles



Spring loaded rubber wrapped steel handles with nylon base.

2 Ways opening (left or right)



Removable lid. Both sides are accessible for opening in an instant. Left and right opening options.

Practical storage & easy cleaning



Included is a basket with a removable partition. The flush-mounted evaporator plate and discharge valve make for straightforward cleaning.


Interior multi-point LED light with magnetic switch



When the lid is opened or closed, the LED lights turn on or off.

Storage Capacity	28L	35L	40L	50L	60L
Power consumption	DC 12V 3.2A AC 24V 1.6A	DC 12V 3.8A AC 24V 1.9A	DC 12-24V 4.2-2.2A AC 100-240V 50-60Hz 0.8-0.4A		
Voltage	DC 12/24V+external AC adaptor 100-240V		Build-in DC 12/24V+AC 100-240V		
Cooling performance	-18℃ to +12℃		-22℃ to +12℃		
Temperature display	LED display and control from -22℃ to +12℃				
Cooling unit	EVERCOOL compressor or SECOP compressor with R1234yf or R134a				
Insulation	CFC & HCFC free PU foam,average 45mm thickness				
N.W./G.W.	12.0KGS/15.0KGS	14.0KGS/17.0KGS	20.0KGS/24.0KGS	21.5KGS/25.5KGS	23.0KGS/27.0KGS
Product Size	557*374*367mm	557*374*407mm	713.8*449*426mm	714*452.4*468.5mm	714*453.4*523.5mm
White inner box	623*433*445mm	623*433*485mm	720*482*480mm	720*482*523mm	720*482*575mm
Carton Size	64X45X46.5cm	64X45X50.5cm	73.5X50X50cm	73.5X50X54cm	73.5X50X59.5cm
20' GP	220pcs	200pcs	154pcs	140pcs	128pcs
40' GP	440pcs	400pcs	308pcs	280pcs	256pcs
40HQ	500pcs	460pcs	354pcs	330pcs	300pcs

DC COMPRESSOR FRIDGE FREEZER

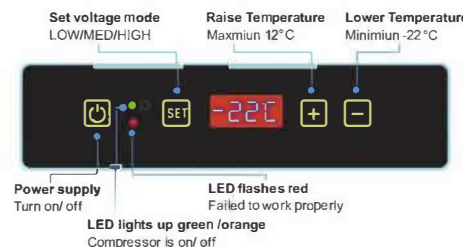

Keep the food fresh for more than 72 hours

