



Mini fridges Catalog




CATALOGUE




MINI FRIDGE



COSMETIC FRIDGE



COOLER BOX



COMPRESSOR FRIDGE

1

CATALOGUE
ABOUT US
P1-P4

2

COSMETIC
FRIDGE
P5-P12

3

MINI FRIDGE
P13- P31

4

COMPRESSOR
FRIDGE
P32-P49

5

CAMPING
COOLER BOX
P50-P74

6

CERTIFICATE
P75-P76



COSMETIC FRIDGE APPLY TO

COSMETICS, BEAUTY / SKINCARE PRODUCTS




COOLING
10-18℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V (with an adapter)
- 2.Volume:12 Litre
- 3.Power consumption:45W±10%

Inner Box Size:310*293*485(mm)	Carton Size:320*305*500(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W./G.W(KGS):4.8/6.5KG	QTY/20*/40*/40*HC:570/1200/1350

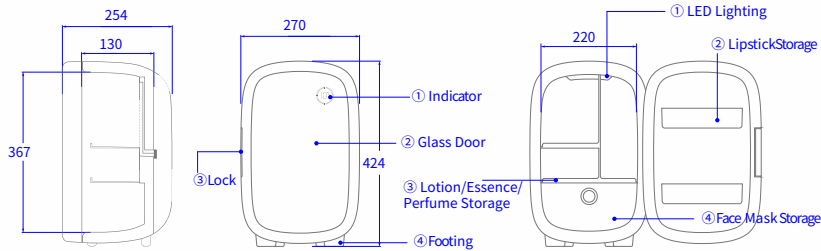


COOLING
10-18℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V (with an adapter)
- 2.Volume:12 Litre
- 3.Power consumption:45W±10%

Inner Box Size:310*293*485(mm)	Carton Size:320*305*500(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W./G.W(KGS):4.8/6.5KG	QTY/20*/40*/40*HC:570/1200/1350

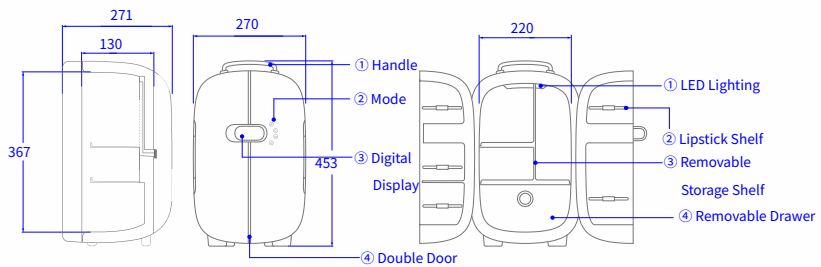


COOLING
10-18℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V
 - 2.Volume:5 Litre
 - 3.Power consumption:38W±10%
- | | |
|--------------------------------|---------------------------------|
| Inner Box Size:368*255*353(mm) | Carton Size:380*270*370(mm) |
| PACKING:1PC/Inner Box 1PC/CTN | |
| N.W./G.W(KGS):4.0/5.4KG | QTY/20*/40*/40*HC:700/1480/1760 |

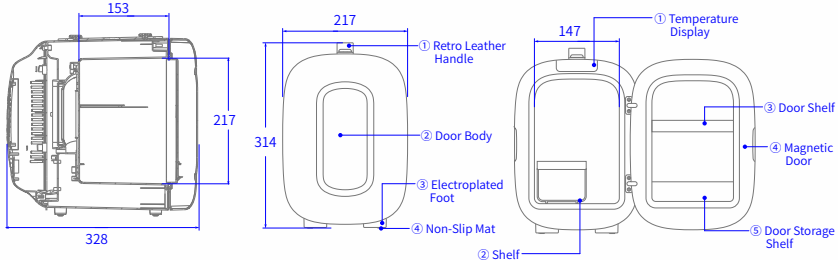


COOLING
10-18℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100V-240V
 - 2.Volume:9 Litre
 - 3.Power consumption:20W±10%
- | | |
|--------------------------------|---------------------------------|
| Inner Box Size:433*340*260(mm) | Carton Size:455*355*275(mm) |
| PACKING:1PC/Inner Box 1PC/CTN | |
| N.W./G.W(KGS):4.7/5.5KG | QTY/20*/40*/40*HC:650/1300/1490 |

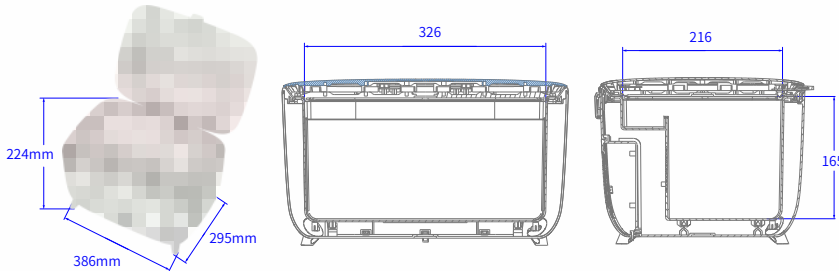


HEATING
45-65℃
COOLING
20-22℃
TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
 - 2.Volume:4 Litre
 - 3.Power consumption:35W±10%
- | | |
|--------------------------------|---------------------------------------|
| Inner Box Size:273*195*290(mm) | Carton Size:405*390*595(mm) |
| PACKING:1PC/Inner Box 4PCS/CTN | |
| N.W./G.W.(KGS):8.0/10.0 | QTY/20*/40*/40*HC(PCS):1600/3200/3900 |

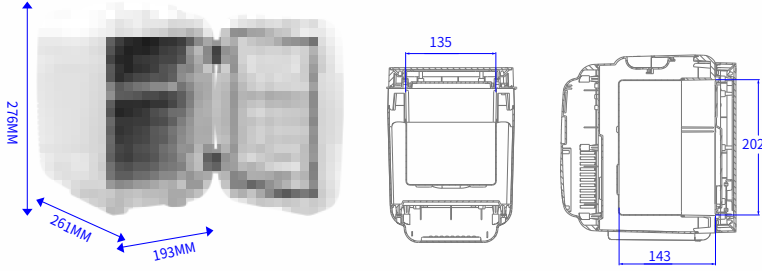


HEATING
45-65℃
COOLING
20-22℃
TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
 - 2.Volume:4 Litre
 - 3.Power consumption:35W±10%
- | | |
|---------------------------------|----------------------------------|
| Inner Box Size:273*195*290 (mm) | Carton Size:405*390*595(mm) |
| PACKING:1PC/Inner Box 4PCS/CTN | |
| N.W./G.W(KGS):8.0/10.0 | QTY/20*/40*/40*HC:1600/3200/3900 |

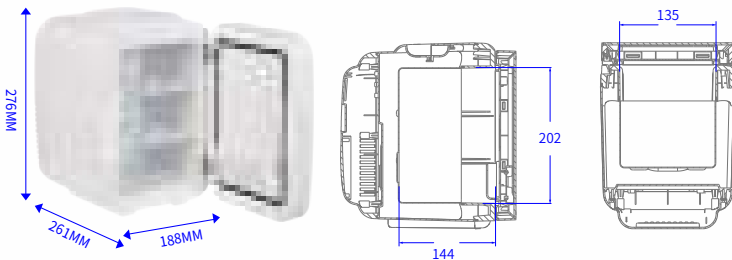


HEATING 45-65℃
COOLING 20-22℃
TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

Inner Box Size:300*198*285(mm)	Carton Size:585*420*320(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):8.0/10.0	QTY/20"/40"/40"HC(PCS):1400/2950/3450

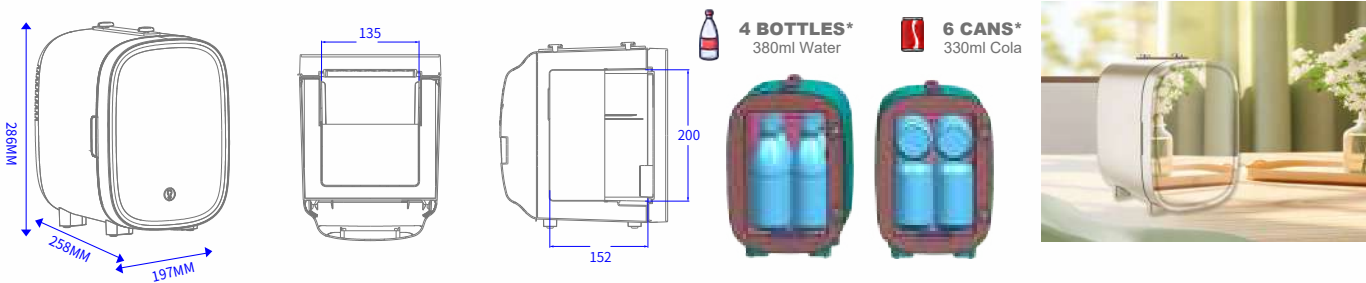


HEATING 50-65℃
COOLING 20-22℃
TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC100-120V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%

Inner Box Size:341*243*349(mm)	Carton Size:350*490*700(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):11/15	QTY/20"/40"/40"HC(PCS):850/1750/2050

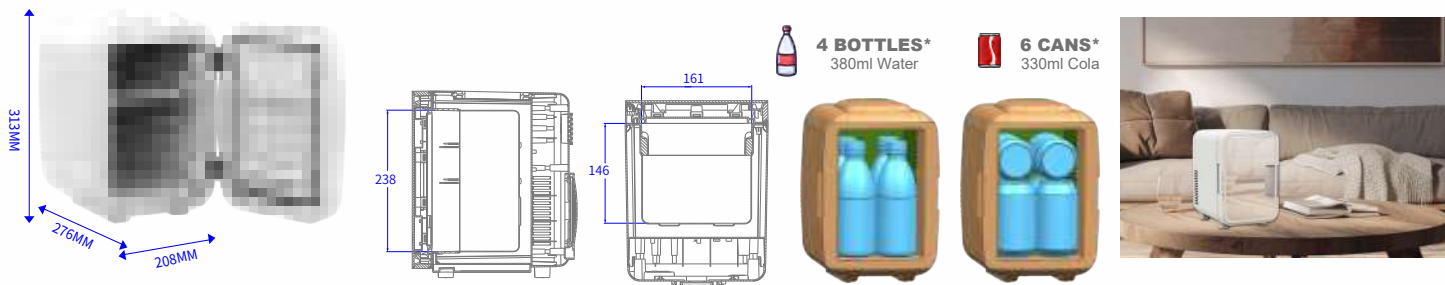


COOLING 17-19℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):9/11.5	QTY/20"/40"/40"HC(PCS):1100/2400/2700

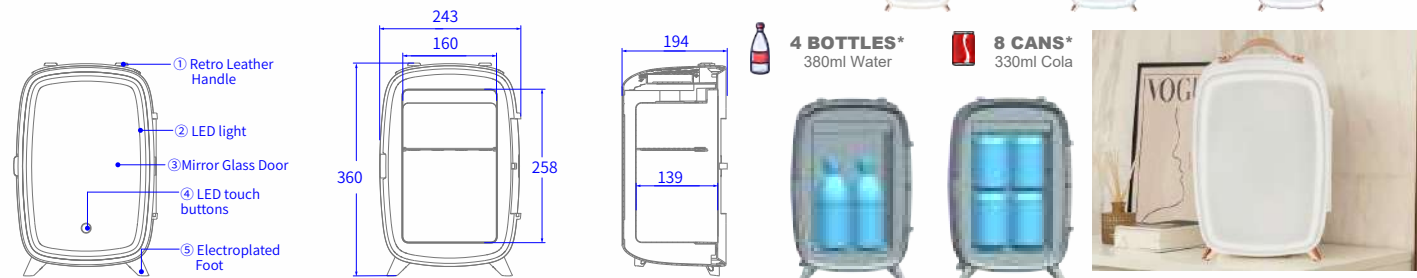


HEATING 40-50℃
COOLING 16-20℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:48W±10%

Inner Box Size:326*280*379(mm)	Carton Size:575*340*395(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):7.1/9.8	QTY/20"/40"/40"HC(PCS):760/1500/1800

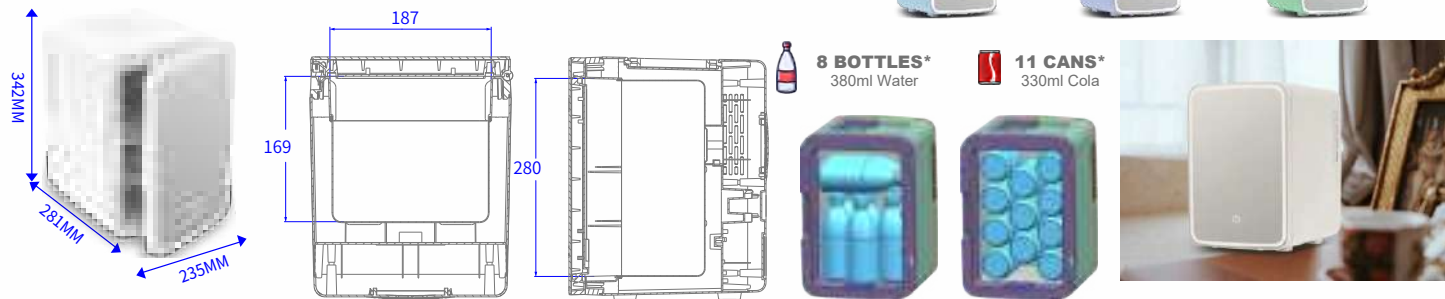

COSMETIC FRIDGE
APPLY TO

COSMETICS, BEAUTY / SKINCARE PRODUCTS



COOLING
5-8℃
TA: 25℃

324MM
190MM
274MM

266

137
162

THERMOELECTRIC COOLER

1.Voltage:DC 12V and AC 220V-240V or AC100-120V

2.Volume:6 Litre

3.Power consumption:35W±10%

Inner Box Size: 326*280*379(mm)	Carton Size: 575*340*395(mm)
Inner Size: 162*137*266(mm)	PACKING:1PC/Inner Box 2PCS/CTN
N.W./G.W(KGS):9/11.5KG	QTY/20*/40*/40*HC:1100/2400/2700

COOLING
5-8℃
TA: 25℃

243MM
215MM
341MM

143
150
90
148

247
254
252

THERMOELECTRIC COOLER

1.Voltage: AC 220V-240V or AC100-120V

2.Volume:5 Litre

3.Power consumption:38W±10%

Carton Size: 378*248*295(mm)	
PACKING:1PC/CTN	
N.W./G.W(KGS):2.3/3KG	QTY/20*/40*/40*HC:1149/2263/2608

COOLING
5-8℃
TA: 25℃

324MM
190MM
274MM

266

137
162

THERMOELECTRIC COOLER

1.Voltage:DC 12V and AC 220V-240V or AC100-120V

2.Volume:6 Litre

3.Power consumption:35W±10%

Inner Box Size: 326*280*379(mm)	Carton Size: 575*340*395(mm)
Inner Size: 162*137*266(mm)	PACKING:1PC/Inner Box 2PCS/CTN
N.W./G.W(KGS):9/11.5KG	QTY/20*/40*/40*HC:1100/2400/2700

MINI FRIDGE APPLY TO

CAR, HOME, HOTEL, BAR, OFFICE, COSMETIC



COOLING
5-8℃
TA: 25℃



MINI FRIDGE

PRODUCT NAME AND TECHNICAL FEATURES

- 1.Voltage:DC 5V with USB cord AC 100V-240V with an adapter
- 2.Volume:0.5 Litre
- 3.Power consumption:48W±10%

Inner Box Size:140*140*215(mm)	Carton Size:730*300*450(mm)
PACKING:1PC/Inner Box 20PCS/CTN	
N.W/G.W.(KGS):8/10	QTY/20"/40"/40"HC(PCS)5800/12000/14000

 **1 CANS***
330ml Cola

COOLING
5-8℃
TA: 25℃



MASK THERMOMETER COLD/HEAT

PRODUCT NAME AND TECHNICAL FEATURES

- 1.Voltage:AC 220-240V/AC 100-120V
- 2.Volume:A mask
- 3.Power consumption:30W

MINI FRIDGE

COOLING
2-18℃
TA: 25℃




THERMOELECTRIC INSULIN CASE

- 1.Voltage:DC 5V,USB Cord AC 100-240V with AC Plug
- 2.Volume:6 insulin
- 3.2-18℃ set temperature

Inner Box Size:330*130*155(mm)	Carton Size:350*290*660(mm)
PACKING:1PC/Inner Box 9PCS/CTN	
N.W/G.W.(KGS):10.4/14.4	QTY/20*/40*/40*HC(PCS)3700/7700/9000

 **6 INSULIN***

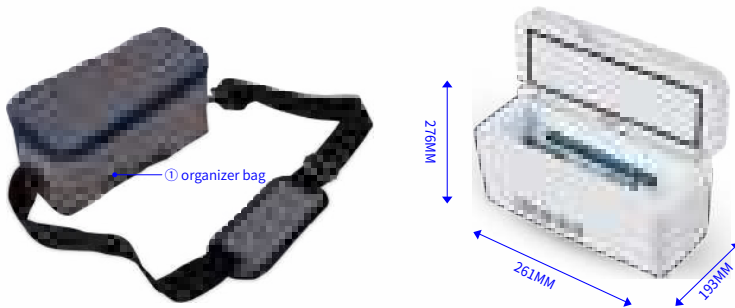

COOLING
3℃
TA: 20℃




KITCHEN GARBAGE COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:3.5 Litre
- 3.Power consumption:20W±10%

Inner Box Size:238*238*303(mm)	Carton Size:250*250*320(mm)
PACKING:1PC/Inner Box 1PCS/CTN	
N.W/G.W.(KGS):1.9/2.3	QTY/20*/40*/40*HC(PCS)1300/2850/3200

 **4 BOTTLES***
380ml Water

 **6 CANS***
330ml Cola

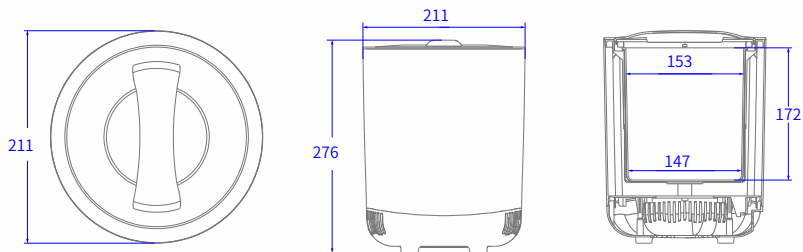

HEATING
45-65℃
COOLING
5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%

Inner Box Size:285*200*295(mm)	Carton Size:420*300*615(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):8.0/10.0	QTY/20*/40*/40*HC(PCS)1500/3200/3900

 **4 BOTTLES***
380ml Water

 **6 CANS***
330ml Cola

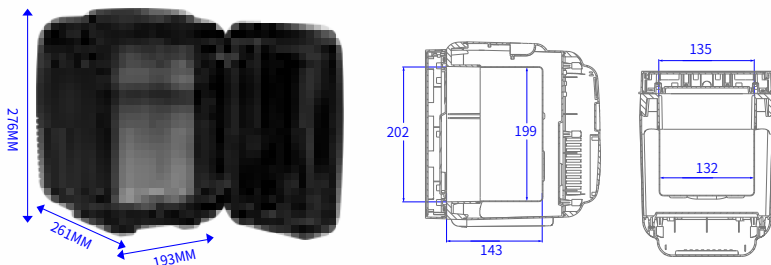


COOLING
5-8℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V
- 2.Volume:2.5 Litre
- 3.Power consumption:48W±10%

Inner Box Size:263*256*172(mm)	Carton Size:511*359*241(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):10/12	QTY/20*/40*/40*HC(PCS)2100/4300/5000

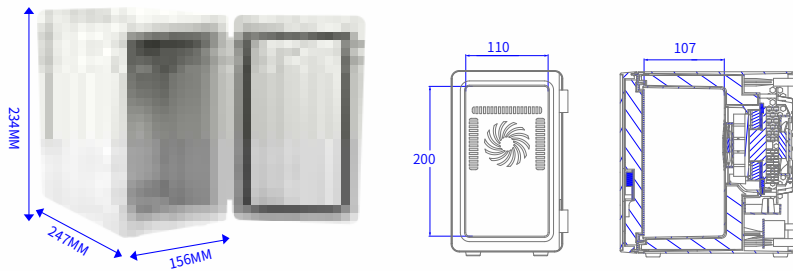

MINI FRIDGE

HEATING

45-55℃

COOLING

5-8℃

TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V (with an adapter)
- 2.Volume:4 Litre
- 3.Power consumption:20W±10%


Inner Box Size:300*198*285(mm)	Carton Size:585*420*320(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):6.5/9	QTY/20*/40*/40*HC(PCS):1300/2850/3200



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

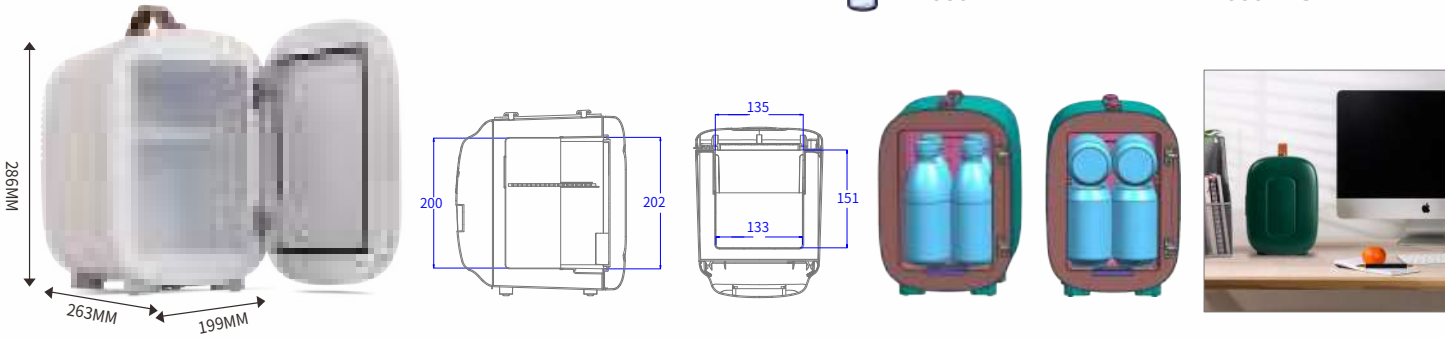

HEATING

45-65℃

COOLING

5-8℃

TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):8.0/10.0	QTY/20*/40*/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

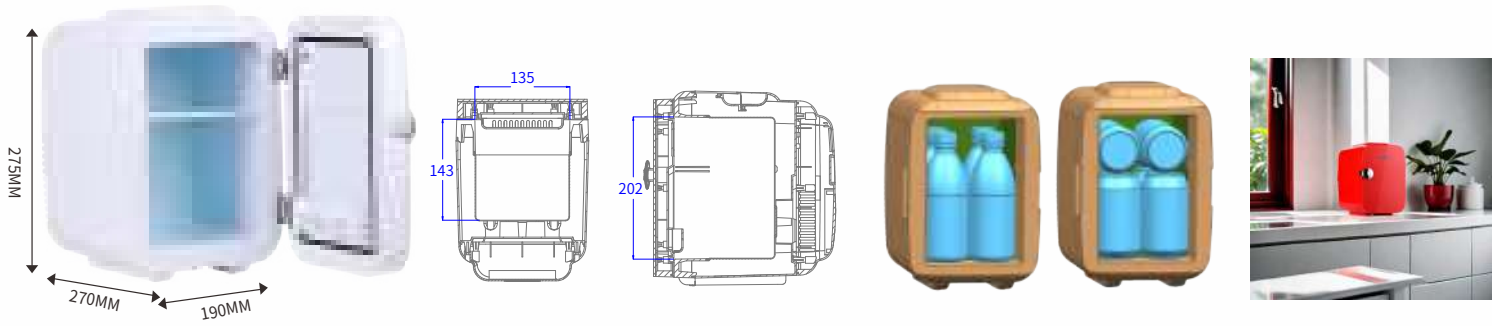

HEATING

45-65℃

COOLING

5-8℃

TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.5/9.2	QTY/20*/40*/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

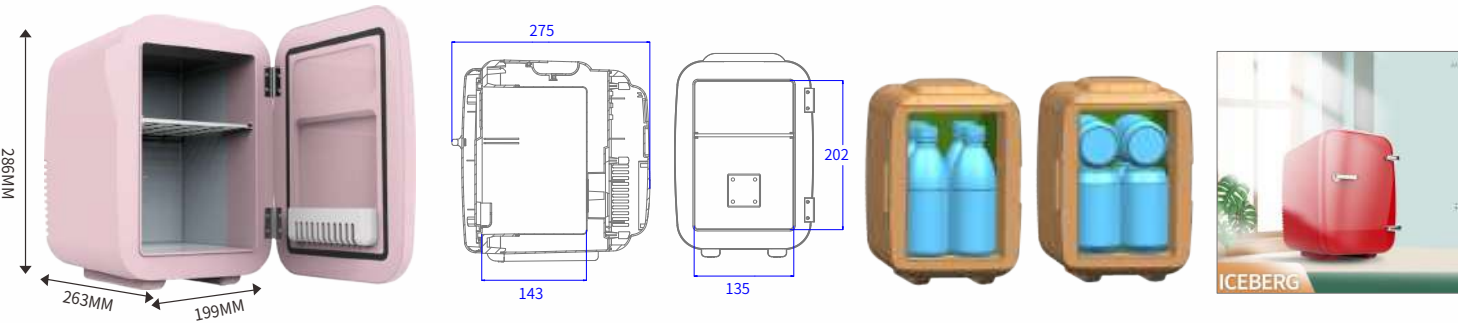

HEATING

45-65℃

COOLING

5-8℃

TA: 25℃



(US/UK/JP exclusive)
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.5/9.2	QTY/20*/40*/40*HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

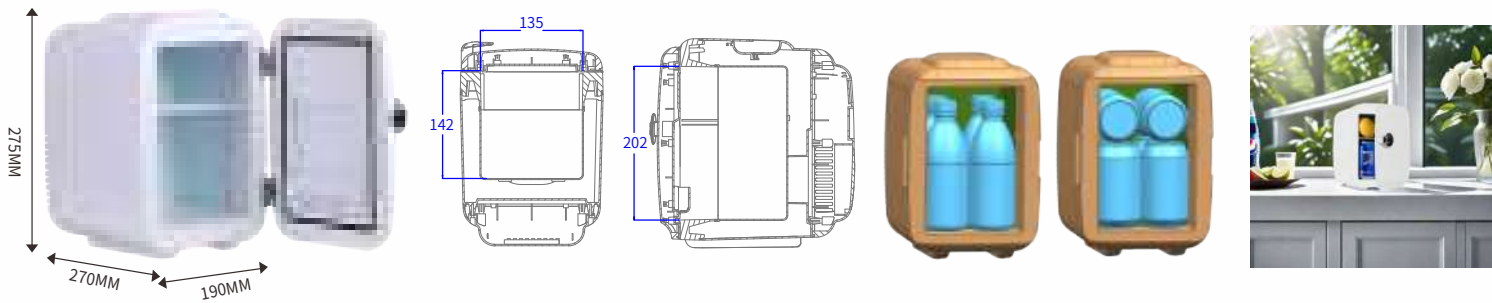

MINI FRIDGE

HEATING

45-65℃

COOLING

5-8℃

TA: 25℃



- (US exclusive)
THERMOELECTRIC COOLER AND WARMER
- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
 - 2.Volume:4 Litre
 - 3.Power consumption:35W±10%


Inner Box Size:273*194*290(mm)	Carton Size:405*290*595(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7.2/9.0	QTY/20"/40"/40"HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

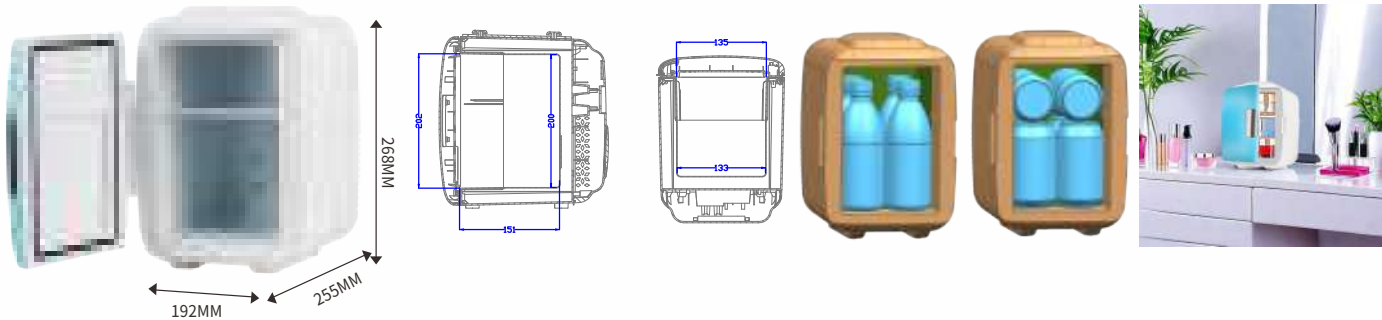

HEATING

45-55℃

COOLING

5-8℃

TA: 25℃



- (US/EU exclusive)
THERMOELECTRIC COOLER AND WARMER
- 1.Voltage:AC 100-240V(with an adapter)
 - 2.Volume:4 Litre
 - 3.Power consumption:20W±10%


Inner Box Size:274*196*277(mm)	Carton Size:405*290*575(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/10	QTY/20"/40"/40"HC(PCS):1500/3200/3900



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

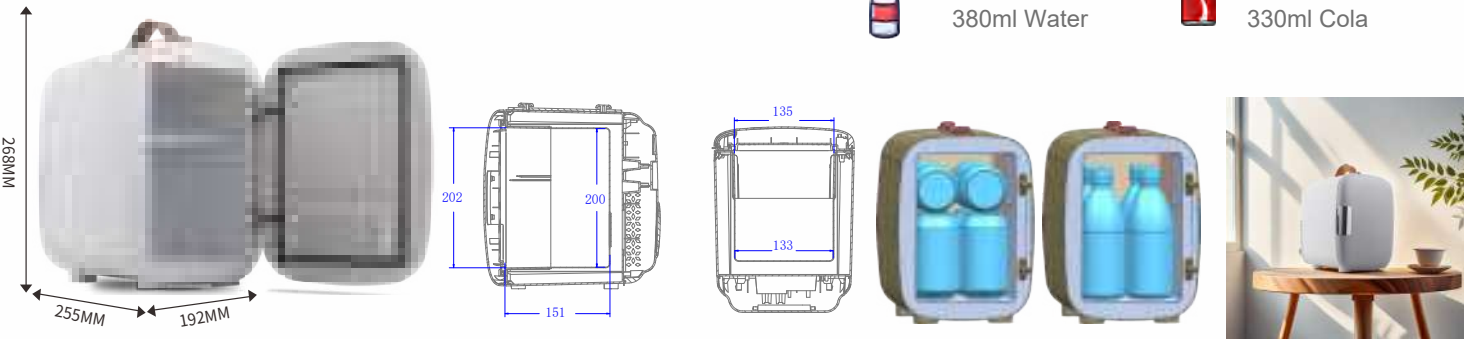

HEATING

45-55℃

COOLING

5-8℃

TA: 25℃



- (US/EU exclusive)
THERMOELECTRIC COOLER AND WARMER
- 1.Voltage:AC 100-240V(with an adapter)
 - 2.Volume:6 Litre
 - 3.Power consumption:20W±10%


Inner Box Size:276*219*337(mm)	Carton Size:455*290*350(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):4.6/6.6	QTY/20"/40"/40"HC(PCS):1200/2400/2850



4 BOTTLES*
380ml Water



8 CANS*
330ml Cola

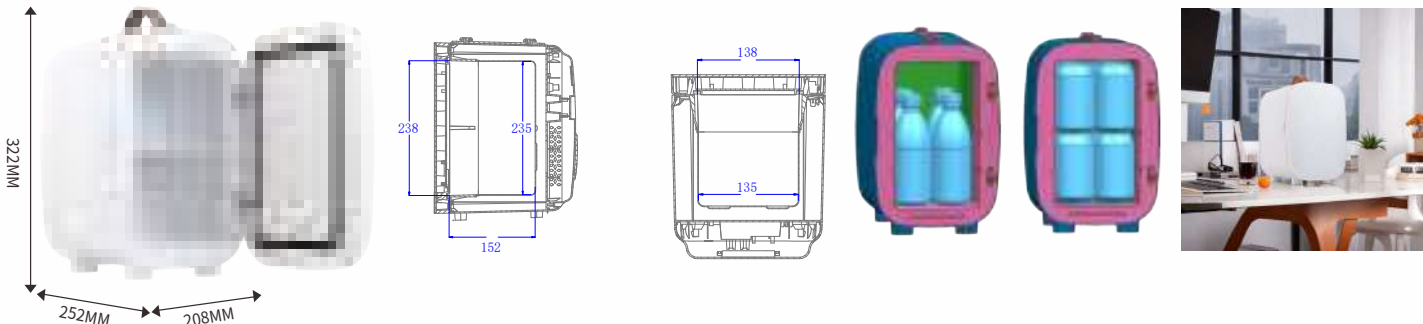

HEATING

45-55℃

COOLING

5-8℃

TA: 25℃



- (US/EU exclusive)
THERMOELECTRIC COOLER AND WARMER
- 1.Voltage:AC 100-240V(with an adapter)
 - 2.Volume:6 Litre
 - 3.Power consumption:20W±10%


Inner Box Size:276*219*337(mm)	Carton Size:455*290*350(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):3.8/5.8	QTY/20"/40"/40"HC(PCS):1200/2400/2850



4 BOTTLES*
380ml Water



6 CANS*
330ml Cola

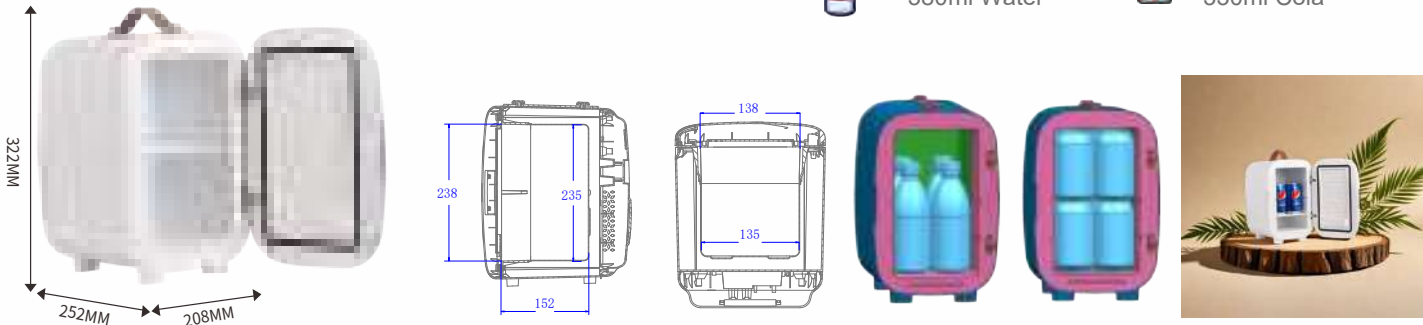

MINI FRIDGE

HEATING
50-65℃
COOLING
5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%

Inner Box Size:315*260*350(mm)	Carton Size:540*330*720(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):11/15	QTY/20*/40*/40*HC(PCS):850/1750/2050

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola

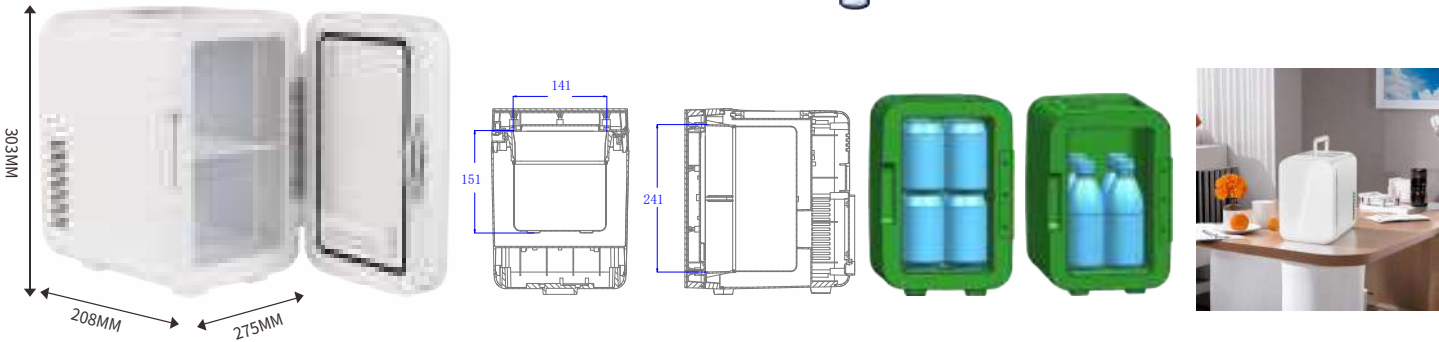

COOLING
8-10℃
TA: 25℃




THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola

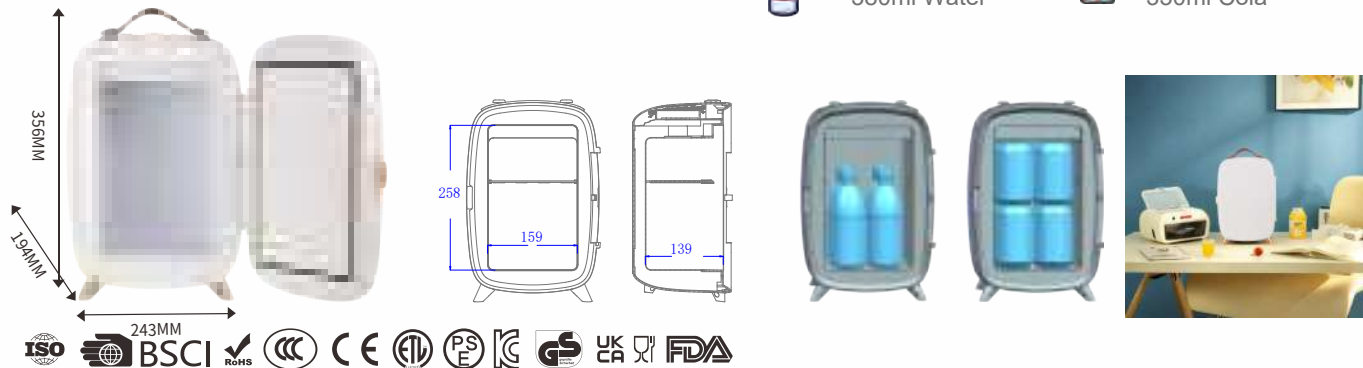

COOLING
8-10℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):9/11.5	QTY/20*/40*/40*HC(PCS):1100/2400/2700

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola



COOLING
8-10℃
TA: 25℃



THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:374*252*218(mm)	Carton Size:525*390*460(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700

4 BOTTLES*
380ml Water
8 CANS*
330ml Cola



MINI FRIDGE

COOLING
8-10℃
TA: 25℃




THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:369*325*222(mm)	Carton Size:520*380*465(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700

 **4 BOTTLES***
380ml Water

 **8 CANS***
330ml Cola

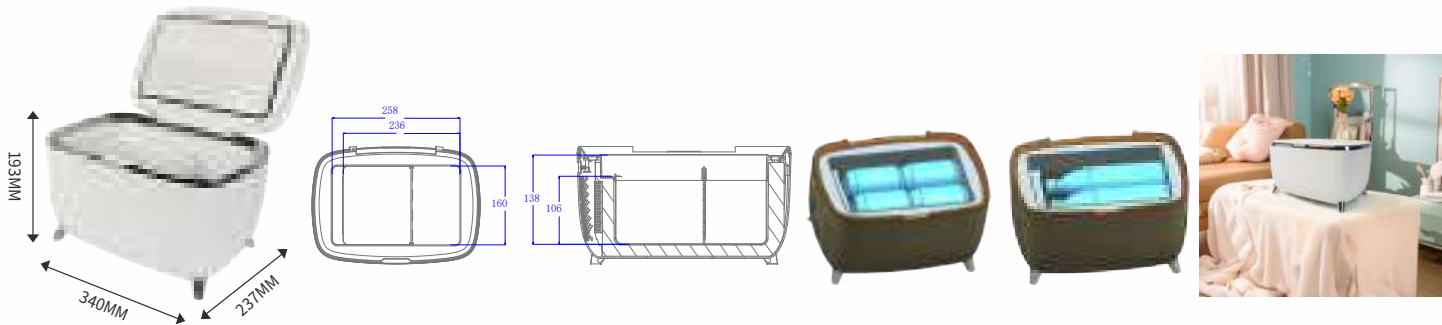

COOLING
8-10℃
TA: 25℃




THERMOELECTRIC COOLER

- 1.Voltage:AC 100-240V(with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%

Inner Box Size:369*325*222(mm)	Carton Size:520*380*465(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):7/9.45	QTY/20*/40*/40*HC(PCS):1100/2400/2700

 **4 BOTTLES***
380ml Water

 **8 CANS***
330ml Cola

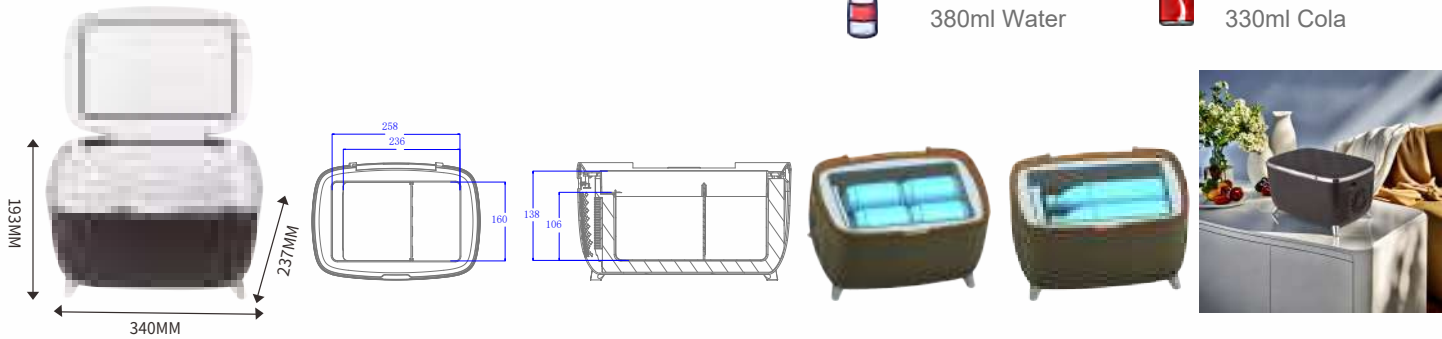

HEATING
50-65℃
COOLING
5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

Inner Box Size:326*280*379(mm)	Carton Size:575*340*395(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):7.5/9.5	QTY/20*/40*/40*HC(PCS):760/1500/1720

 **5 BOTTLES***
380ml Water

 **11 CANS***
330ml Cola

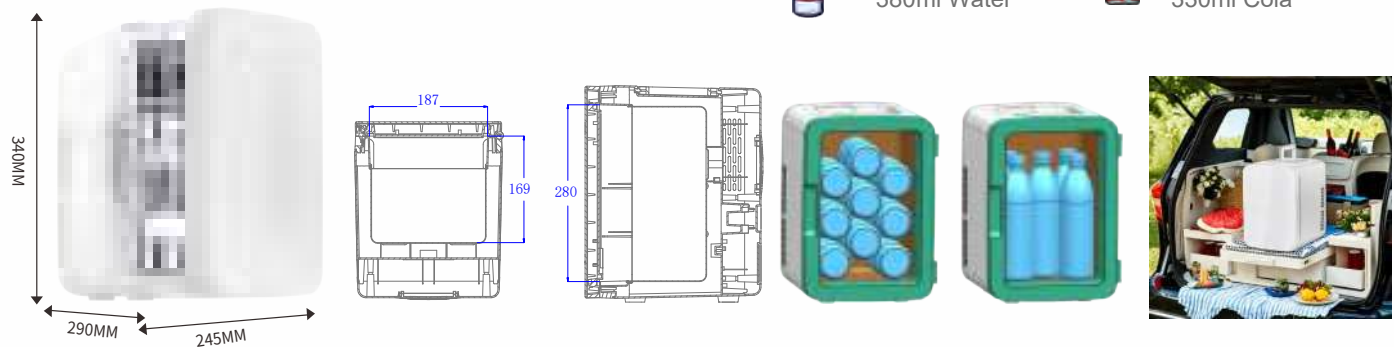

HEATING
50-65℃
COOLING
5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220-240V or AC 100-120V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

Inner Box Size:326*280*379(mm)	Carton Size:575*340*395(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):7.0/9.0	QTY/20*/40*/40*HC(PCS):760/1500/1720

 **5 BOTTLES***
380ml Water

 **11 CANS***
330ml Cola

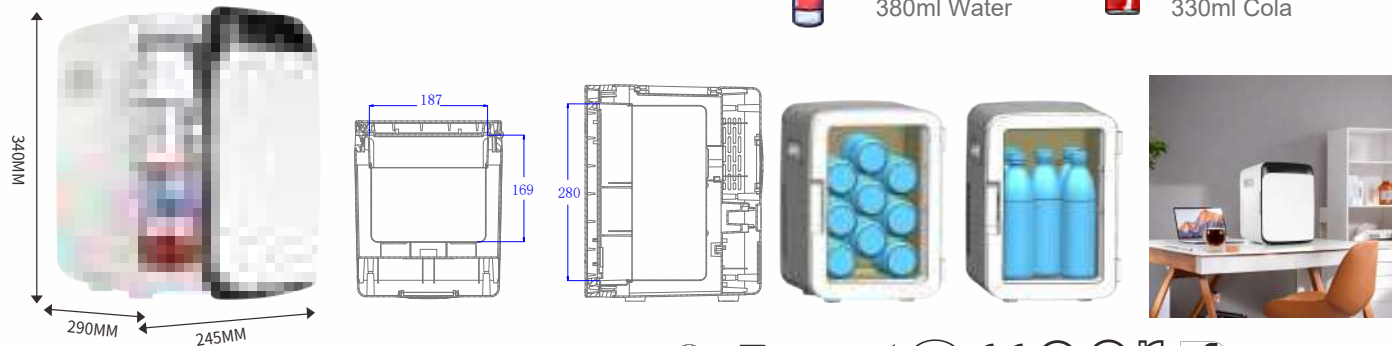

MINI FRIDGE

HEATING 40-50℃
COOLING 5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

Inner Box Size:355*283*398(mm)	Carton Size:590*370*415(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):3.7/4.8	QTY/20*/40*/40*HC(PCS):615/1270/1490

5 BOTTLES* 380ml Water
11 CANS* 330ml Cola

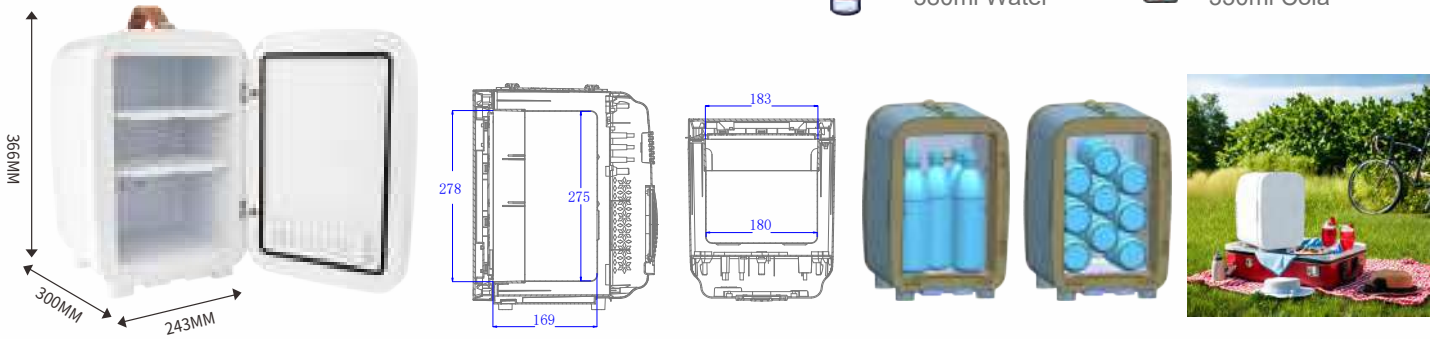

HEATING 40-50℃
COOLING 5-8℃
TA: 25℃




KITCHEN GARBAGE COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:395*313*458(mm)	Carton Size:655*410*470(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):4.9/5.7	QTY/20*/40*/40*HC(PCS):440/913/1070

8 BOTTLES* 380ml Water
16 CANS* 330ml Cola

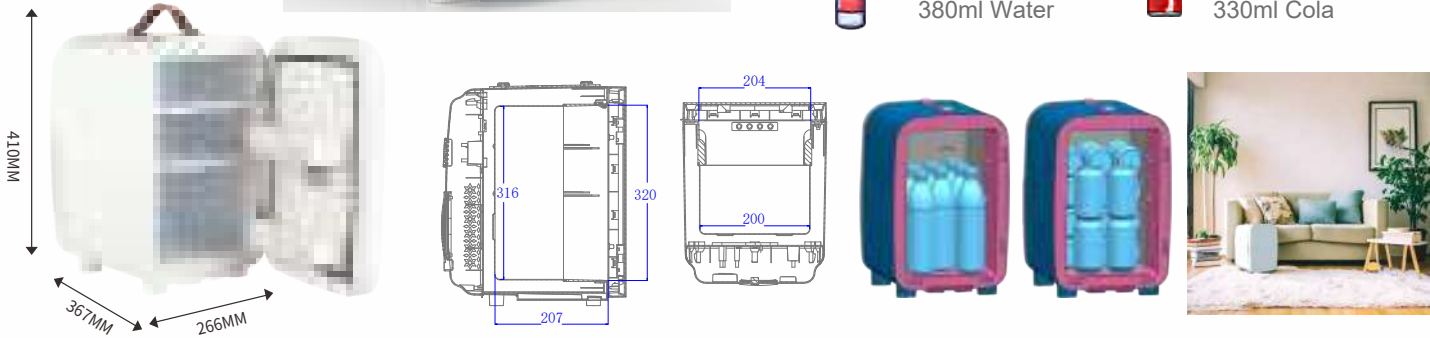

HEATING 40-50℃
COOLING 5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER(single cooling)

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%

Inner Box Size:355*283*398(mm)	Carton Size:590*370*415(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):3.7/4.8	QTY/20*/40*/40*HC(PCS):615/1270/1490

5 BOTTLES* 380ml Water
11 CANS* 330ml Cola

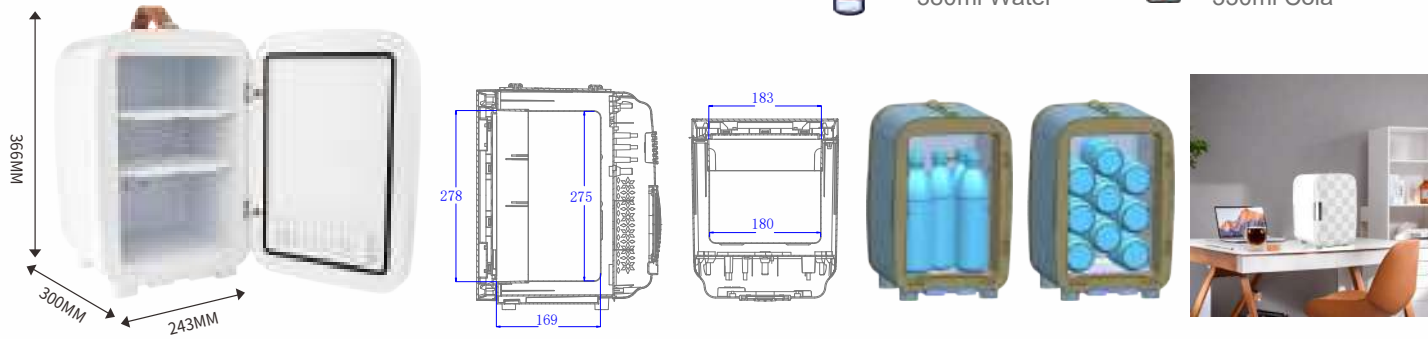

HEATING 40-50℃
COOLING 5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:AC 100-240V or DC 12V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:385*313*458(mm)	Carton Size:655*410*470(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):4.9/5.7	QTY/20*/40*/40*HC(PCS):440/913/1070

8 BOTTLES* 380ml Water
16 CANS* 330ml Cola

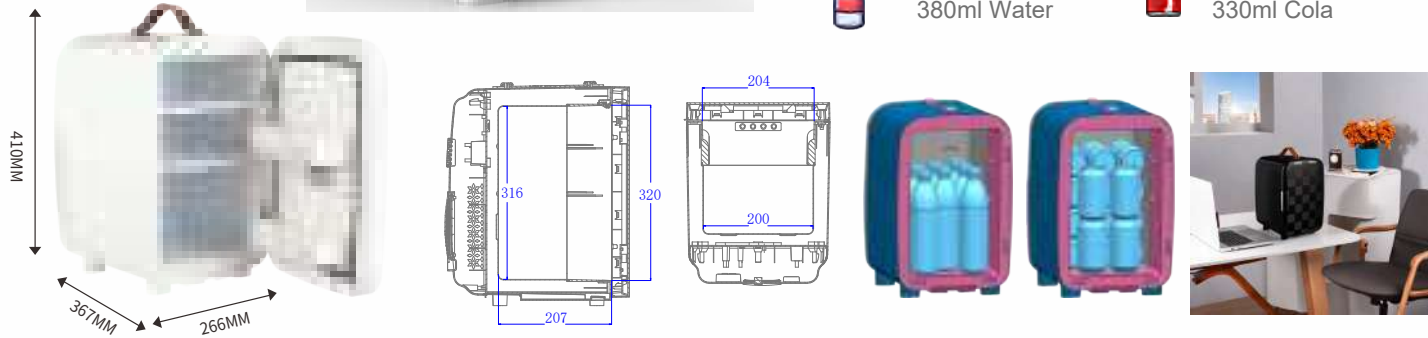

MINI FRIDGE

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:9 Litre
- 3.Power consumption:50W±10%

Inner Box Size:296*298*358(mm)	Carton Size:620*620*380(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W.(KGS):10.6/15.0	QTY/20*/40*/40*HC(PCS):760/1600/1900

7 BOTTLES*
380ml Water **9 CANS***
330ml Cola

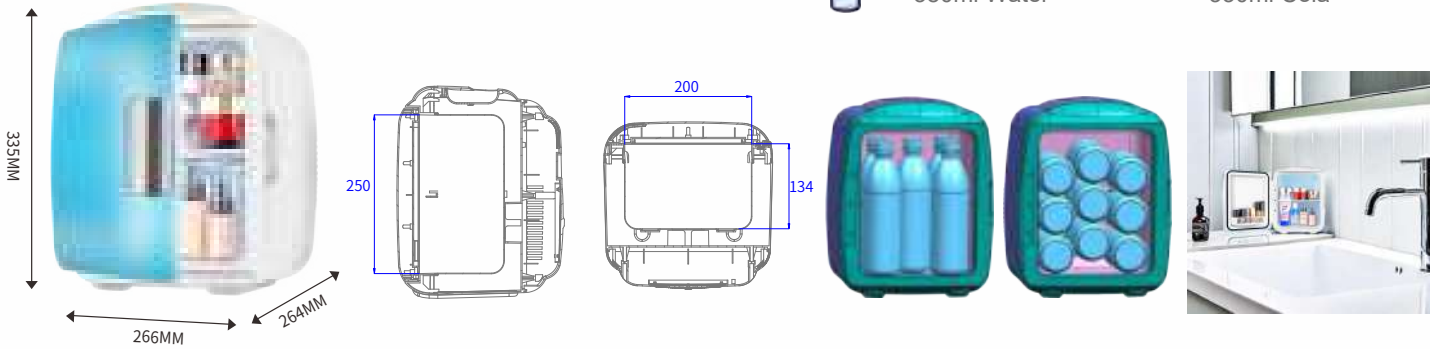

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




KITCHEN GARBAGE COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:12.8 Litre
- 3.Power consumption:50W±10%

Inner Box Size:321*392*403(mm)	Carton Size:650*415*420(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):12.0/13.0	QTY/20*/40*/40*HC(PCS):550/1050/1200

15 BOTTLES*
380ml Water **12 CANS***
330ml Cola

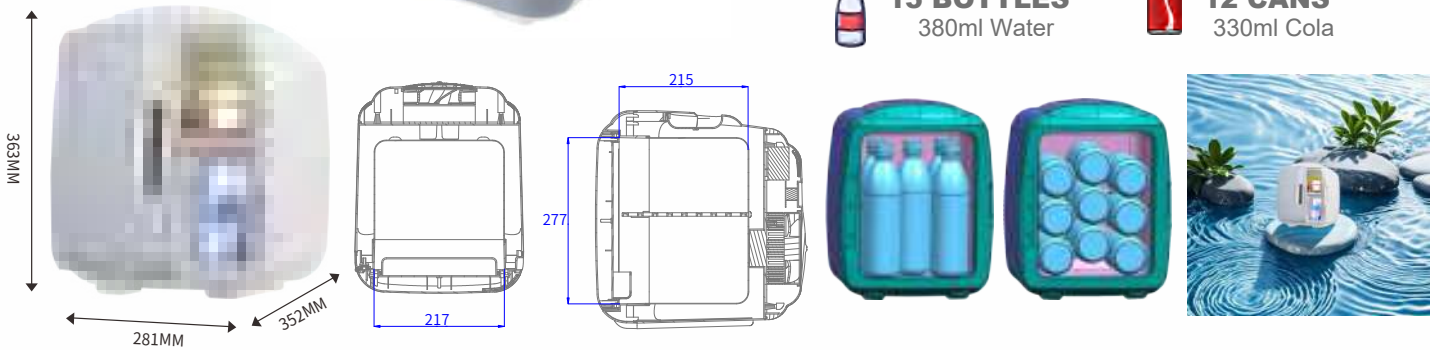

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:394*324*445(mm)	Carton Size:668*410*475(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):9.5/12.5	QTY/20*/40*/40*HC(PCS):450/1000/1100

17 BOTTLES*
380ml Water **20 CANS***
330ml Cola

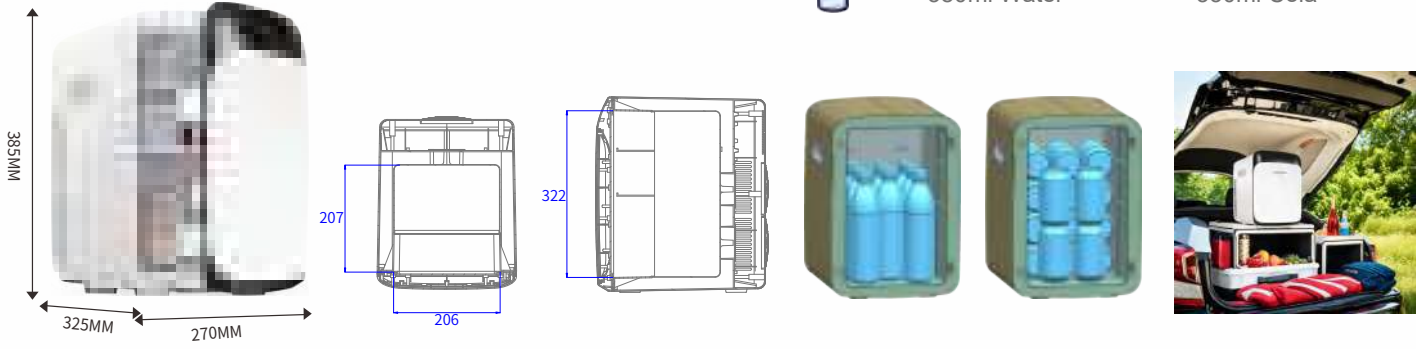

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:394*324*445(mm)	Carton Size:668*410*475(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):9.8/13.0	QTY/20*/40*/40*HC(PCS):450/1000/1100

17 BOTTLES*
380ml Water **20 CANS***
330ml Cola

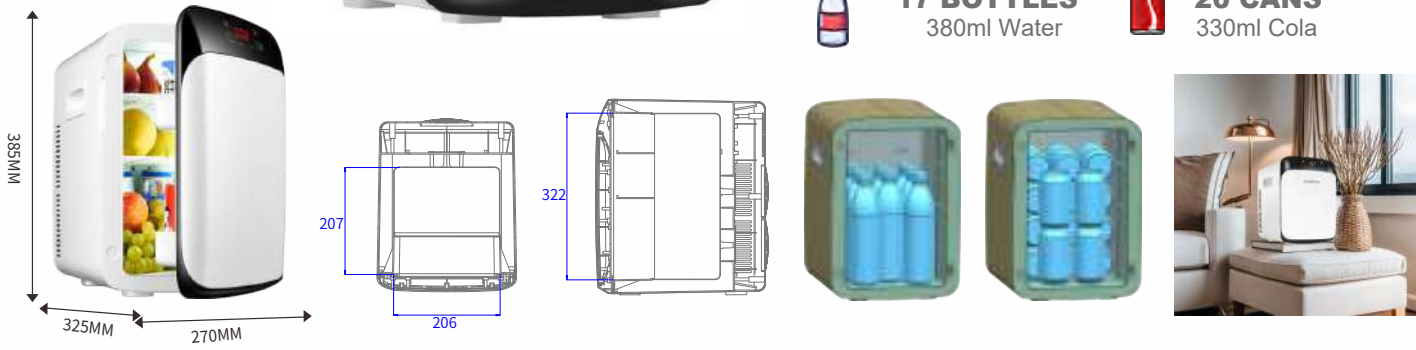

MINI FRIDGE

HEATING 50-65℃
COOLING 5-8℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%

Inner Box Size:380*315*432(mm)	Carton Size:395*645*450(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):9.6/12.8	QTY/20*/40*/40*HC(PCS):450/1000/1100

17 BOTTLES* 380ml Water
20 CANS* 330ml Cola

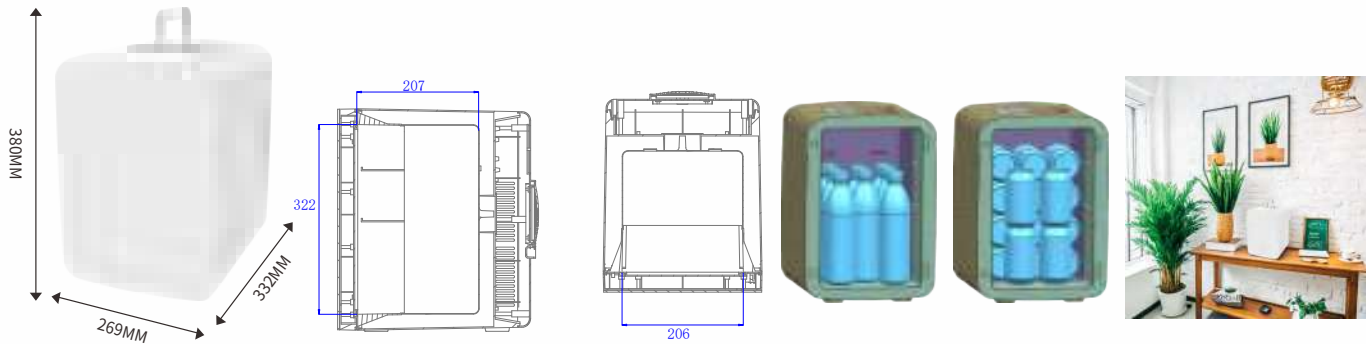

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




KITCHEN GARBAGE COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:15 Litre
- 3.Power consumption:71W±10%

Inner Box Size:380*315*432(mm)	Carton Size:395*645*450(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):10.0/13.5	QTY/20*/40*/40*HC(PCS):450/1000/1100

17 BOTTLES* 380ml Water
20 CANS* 330ml Cola

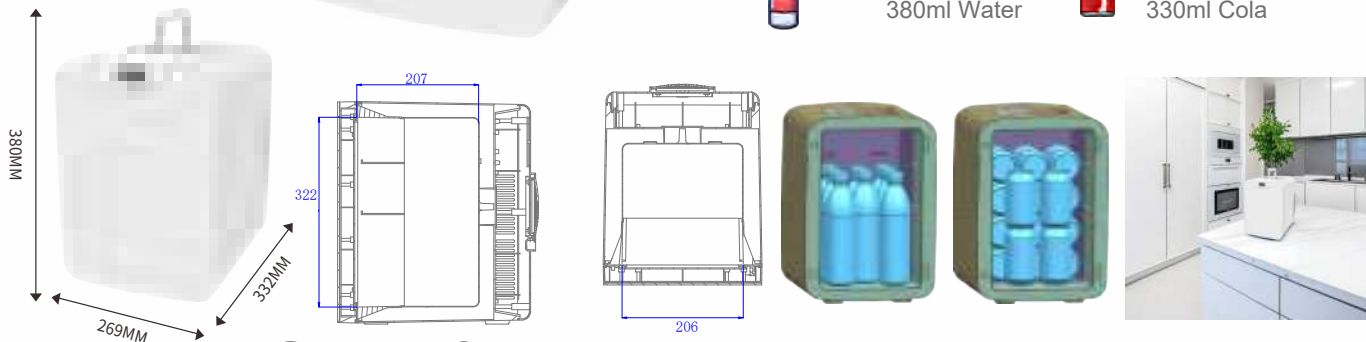

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%

Inner Box Size:415*365*495(mm)	Carton Size:750*435*515(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):12/16	QTY/20*/40*/40*HC(PCS):400/800/1000

19 BOTTLES* 380ml Water
22 CANS* 330ml Cola

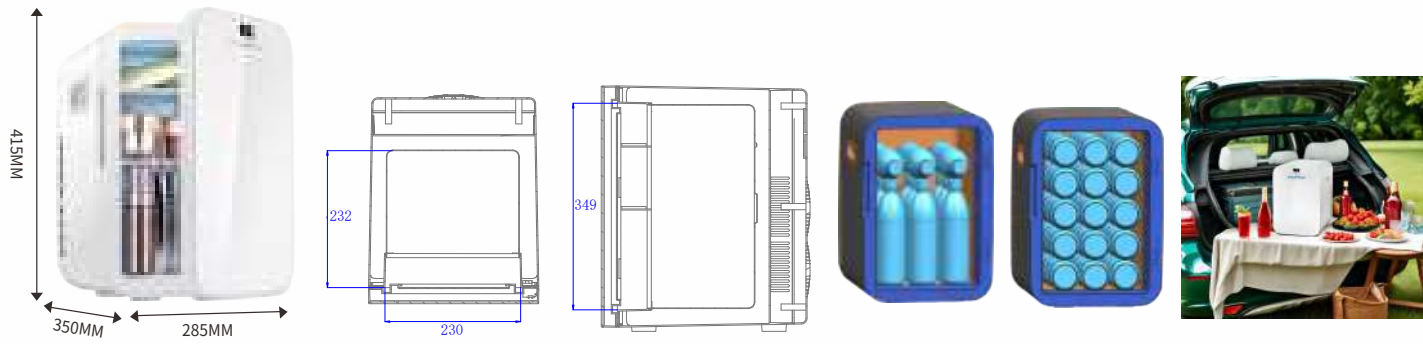

HEATING 50-65℃
COOLING 0-5℃
TA: 25℃




THERMOELECTRIC COOLER AND WARMER(Dual cooling)


- 1.Voltage:DC 12V and AC220V-240V or AC 100-120V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%

Inner Box Size:415*365*495(mm)	Carton Size:750*435*515(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W.(KGS):11/15	QTY/20*/40*/40*HC(PCS):400/800/1000

19 BOTTLES* 380ml Water
22 CANS* 330ml Cola

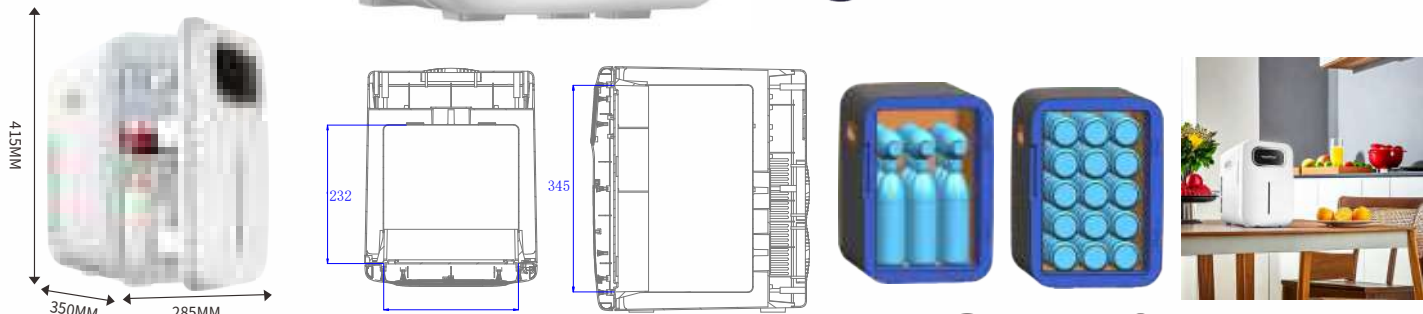

MINI FRIDGE

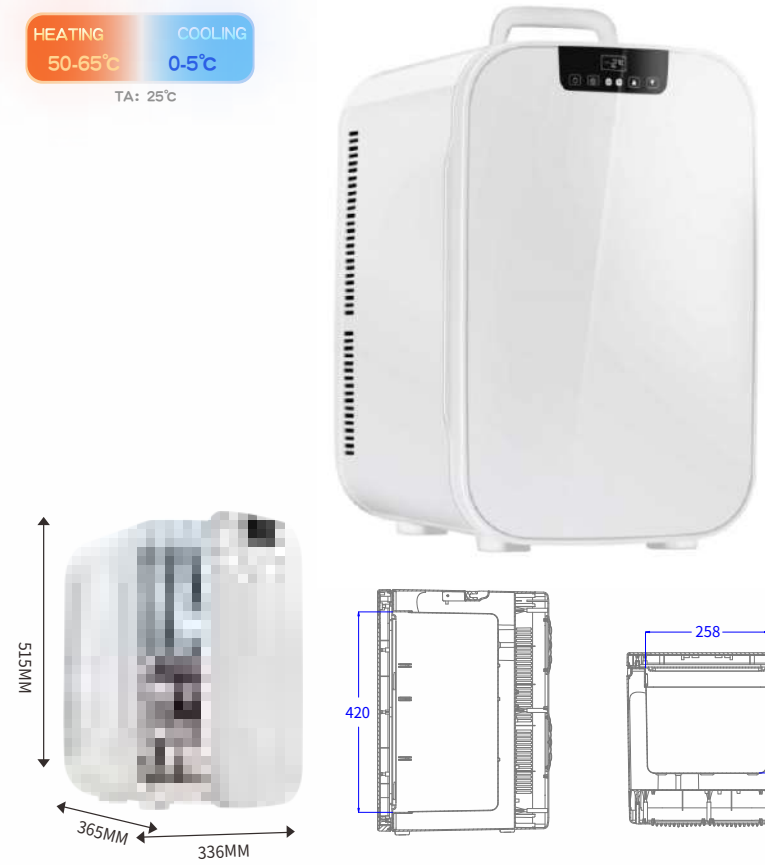

THERMOELECTRIC COOLER AND WARMER(Dual cooling)

1.Voltage:DC 12V and AC220V-240V or AC 100-120V

2.Volume:25 Litre

3.Power consumption:71W±10%

Carton Size:420*400*580(mm)	
PACKING:1 PC/CTN	
N.W/G.W.(KGS):8.5/10	QTY/20"/40"/40*HC(PCS):310/570/660

22 BOTTLES* 380ml Water 29 CANS* 330ml Cola



THERMOELECTRIC COOLER AND WARMER(Dual cooling)

1.Voltage:DC 12V and AC220V-240V or AC 100-120V

2.Volume:25 Litre

3.Power consumption:71W±10%

Carton Size:410*385*565(mm)	
PACKING:1PC/CTN	
N.W/G.W.(KGS):7/7.8	QTY/20"/40"/40*HC(PCS):320/670/780

22 BOTTLES* 380ml Water 29 CANS* 330ml Cola



COMPRESSOR FRIDGE

COMPRESSOR FRIDGE
APPLY TO
CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING

- Dual Purpose
- Low Noise
- down to -20°C
- Seismic and anti Shake
- Pulley/Pull Rod
- Double Door Design
- Battery Protection
- Double Lithium Battery
- Double Control



COMPRESSOR FRIDGE




COMPRESSOR FRIDGE

COOLING
-22-24℃
TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:18 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:485*260*238(mm)	Carton Size:690*413* 420(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40*HC(PCS):220/445/534	

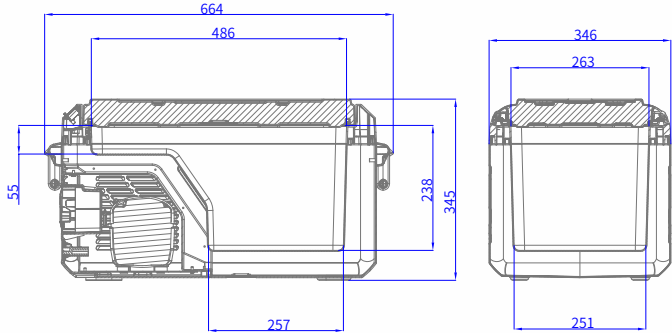


COOLING
-22-24℃
TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:25 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:485*260*293(mm)	Carton Size:690*413*475(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40*HC(PCS):176/356/445	

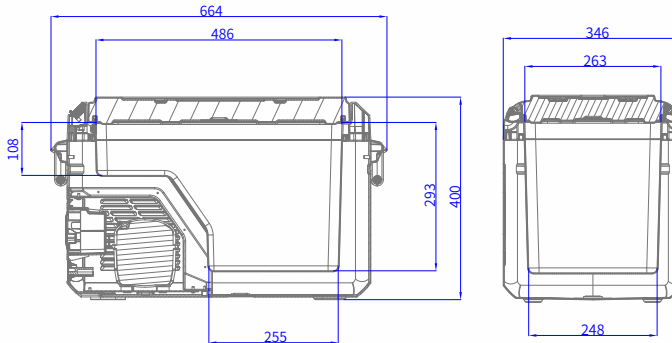


COOLING
-22-24℃
TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:485*260*348(mm)	Carton Size:690*413*530(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40*HC(PCS):176/356/445	

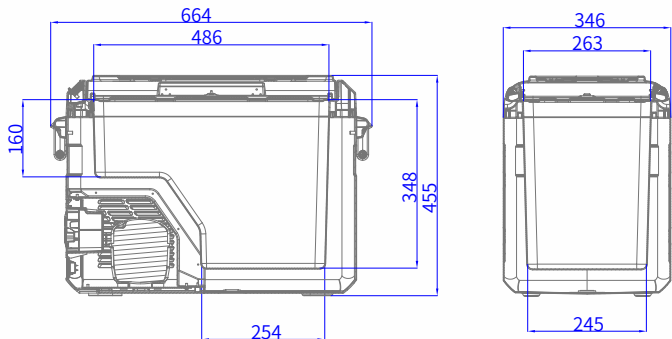



COOLING
-22-24℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:40 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:509*322*329(mm)	Carton Size:740*488*515(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40*HC(PCS):144/288/360	

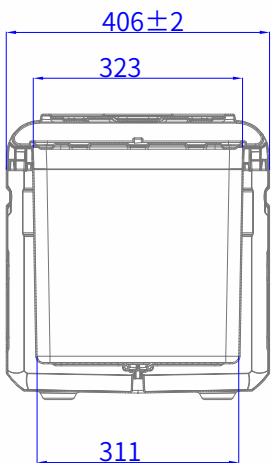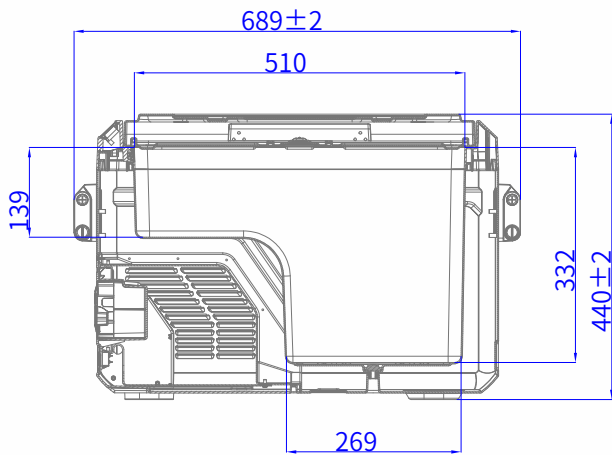




COOLING
-20-20℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:40 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Area1 Size:322*283*331(mm)	Area2 Size:322*193*145(mm)
PACKING:1PC/CTN	Carton Size:838*510*515(mm)(with handle)
QTY/20"/40"/40*HC(PCS):116/236/300(with handle)	

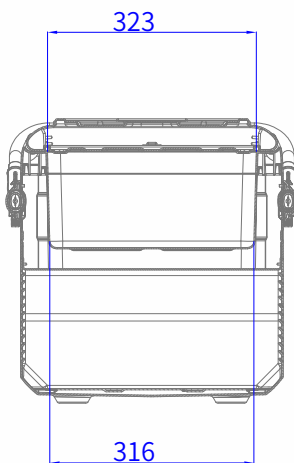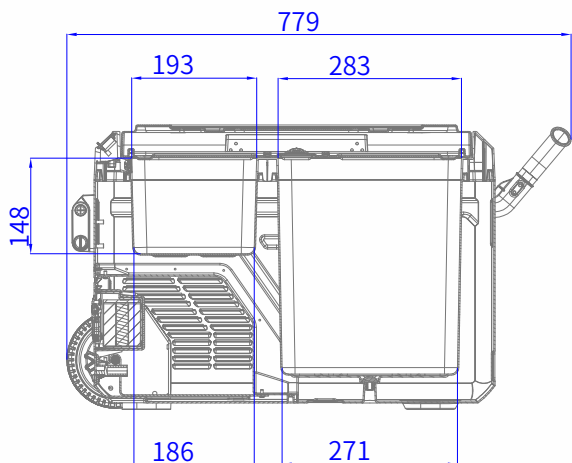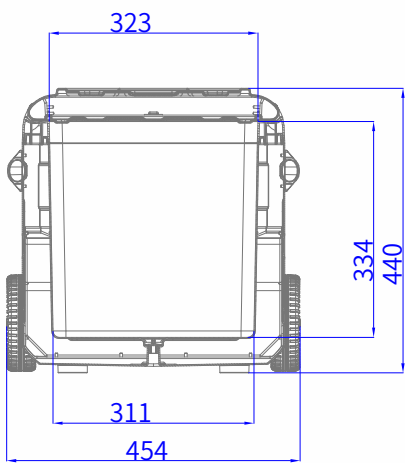

COMPRESSOR FRIDGE



COOLING
-22-24℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:50 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:509*322*397(mm)	Carton Size:740*488*580(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40"HC(PCS):136/280/280	

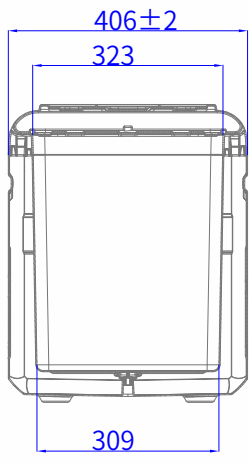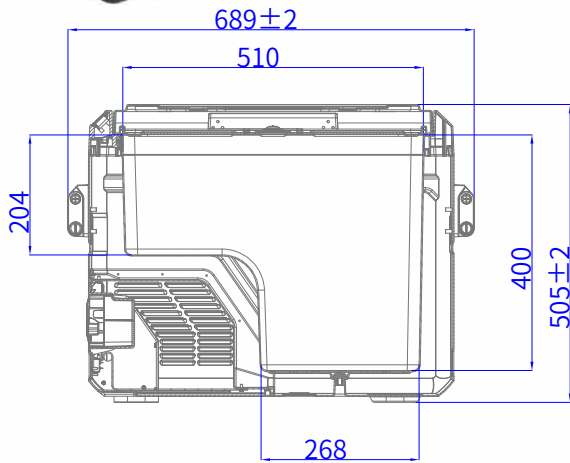




COOLING
-20-20℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:50 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Area1 Size:322*283*398(mm)	Area2 Size:322*193*207(mm)
PACKING:1PC/CTN	Carton Size:838*510*580(mm)(with handle)
QTY/20"/40"/40"HC(PCS):116/236/236	

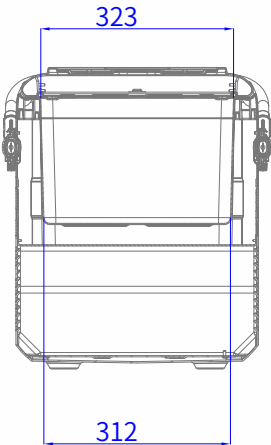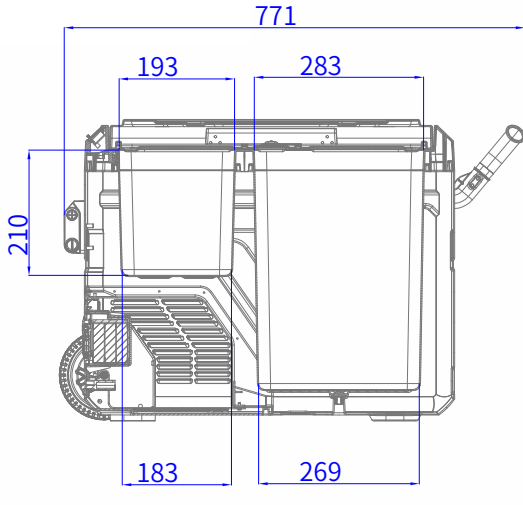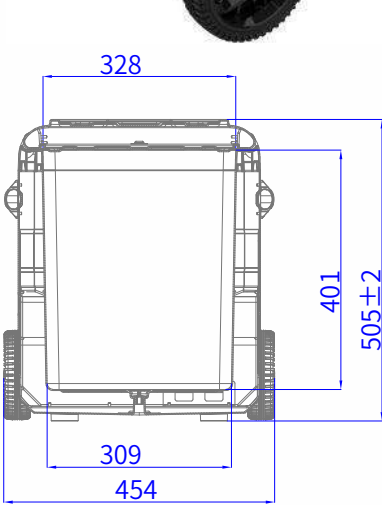



COOLING
-22-24℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:60 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:509*322*461(mm)	Carton Size:740*488*645(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40"HC(PCS):102/210/280	

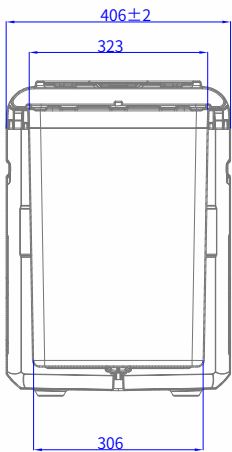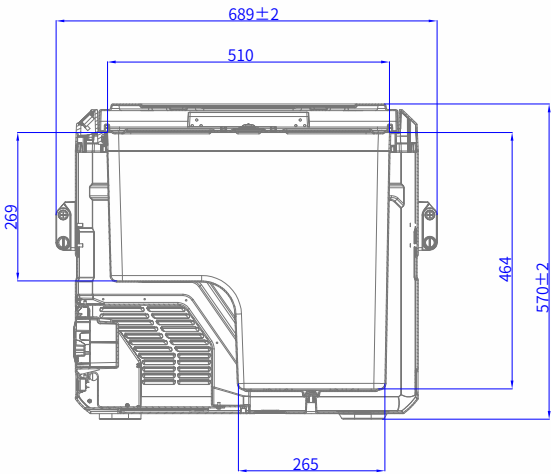




COOLING
-20-20℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:60 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Area1 Size:322*283*331(mm)	Area2 Size:322*193*145(mm)
PACKING:1PC/CTN	Carton Size:838*510*645(mm)(with handle)
QTY/20"/40"/40"HC(PCS):87/177/236(with handle)	

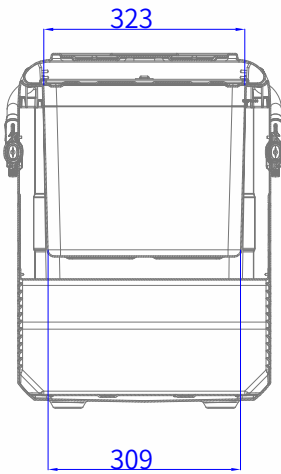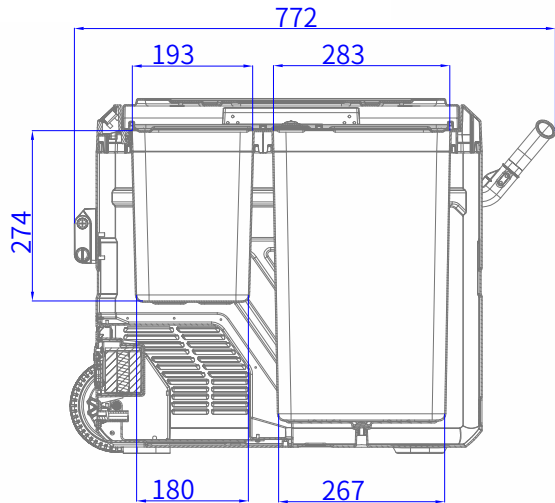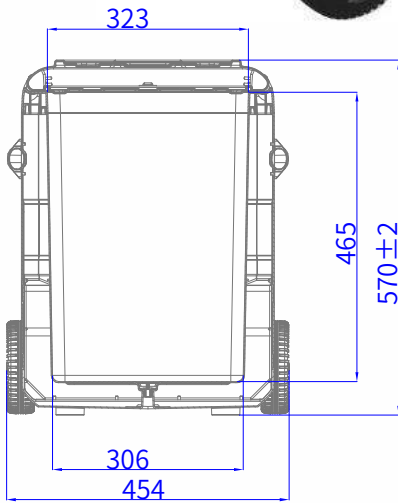


COOLING
-22-24℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:15 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:357*156*270(mm)	Carton Size:670*305*430(mm)
PACKING:1PC/CTN	
QTY/20"/40"/40*HC(PCS):325/640/786	

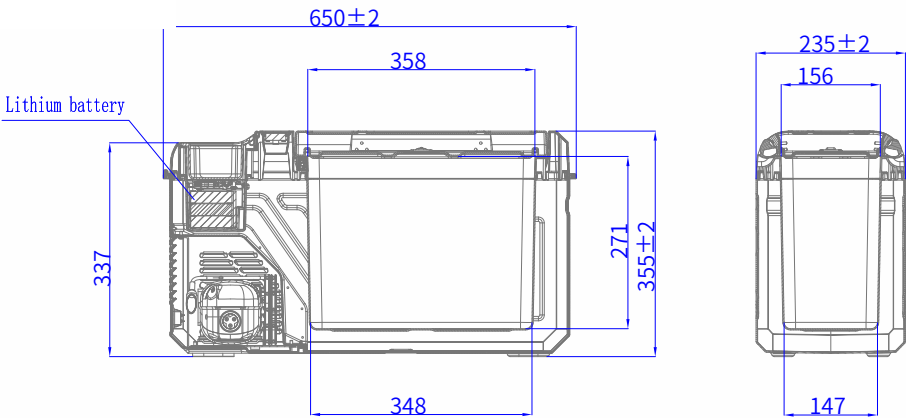

COOLING
-20-20℃

TA: 32℃(no load)



- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:80 Litre
- 3.Cooling:-20℃(ambient temperature 32℃,no load)

Inner Size:303*382*355(mm)*2	Area2 Size:322*193*207(mm)
Outer Size:1066*482*473(mm)	Carton Size:1118*565*550(mm)
Outer Size:1153*528*473(mm)	Carton Size:1210*588*550(mm)(with handle)
PACKING:1PC/CTN	
QTY/20"/40"/40*HC(PCS):80/168/168	QTY/20"/40"/40*HC(PCS):56/116/116(with handle)





Bluetooth Function



USB+TYPE C Charging Port



Lithium Battery + Solar Charging Port



Removable Wire Basket



Double Temperature and Control



Wear Resistant Wheel



Three handle options



Two door cover options

COOLING
-18℃
TA: 25℃(No Load)



COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:35 Litre
- 3.Power consumption:55W±10%

Outer Size:620*344*375(mm)	Carton Size:670*395*445(mm)
Inner Size:370*284*300(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):11.5/12.5	QTY/20"/40"/40"HC(PCS):230/490/570



COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:45 Litre
- 3.Power consumption:55W±10%

Outer Size:622*346*480(mm)	Carton Size:670*395*550(mm)
Inner Size:373*284*407(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):12.5/13.5	QTY/20"/40"/40"HC(PCS):190/380/450



COOLING
-20℃
TA: 32℃(No Load)



COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:20 Litre
- 3.Power consumption:48W±10%

Outer Size:438*365*405(mm)	Carton Size:505*435*470(mm)
Inner Size:330*267*311(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):11.5/13.5	QTY/20"/40"/40"HC(PCS):285/590/690



COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:30 Litre
- 3.Power consumption:48W±10%

Outer Size:438*365*505(mm)	Carton Size:505*435*570(mm)
Inner Size:330*267*411(mm)	PACKING:1PC/CTN
N.W/G.W(KGS):12.5/14.5	QTY/20"/40"/40"HC(PCS):250/510/600

COMPRESSOR FRIDGE

COOLING
-18℃
TA: 25℃(No Load)



COMPRESSOR FRIDGE

- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:23 Litre
- 3.Power consumption:55W±10%

Outer Size:583*365*344(mm)	Inner Size:283*284*267(mm)
Inner Box Size:672*448*432(mm)	Carton Size:690*465*450(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):13/14	QTY/20"/40"/40*HC(PCS):170/380/450



COMPRESSOR FRIDGE


- 1.Voltage:DC 12-24V and AC 100V-240V (with an adapter)
- 2.Volume:32 Litre
- 3.Power consumption:55W±10%

Outer Size:583*365*434(mm)	Inner Size:283*284*357(mm)
Inner Box Size:672*448*522(mm)	Carton Size:690*465*540(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):14/15	QTY/20"/40"/40*HC(PCS):150/320/380



CAMPING COOLER BOX

CAMPING COOLER BOX
APPLY TO
CAR, OUTDOOR , CAMPING , FAMILY PARTY , FISHING

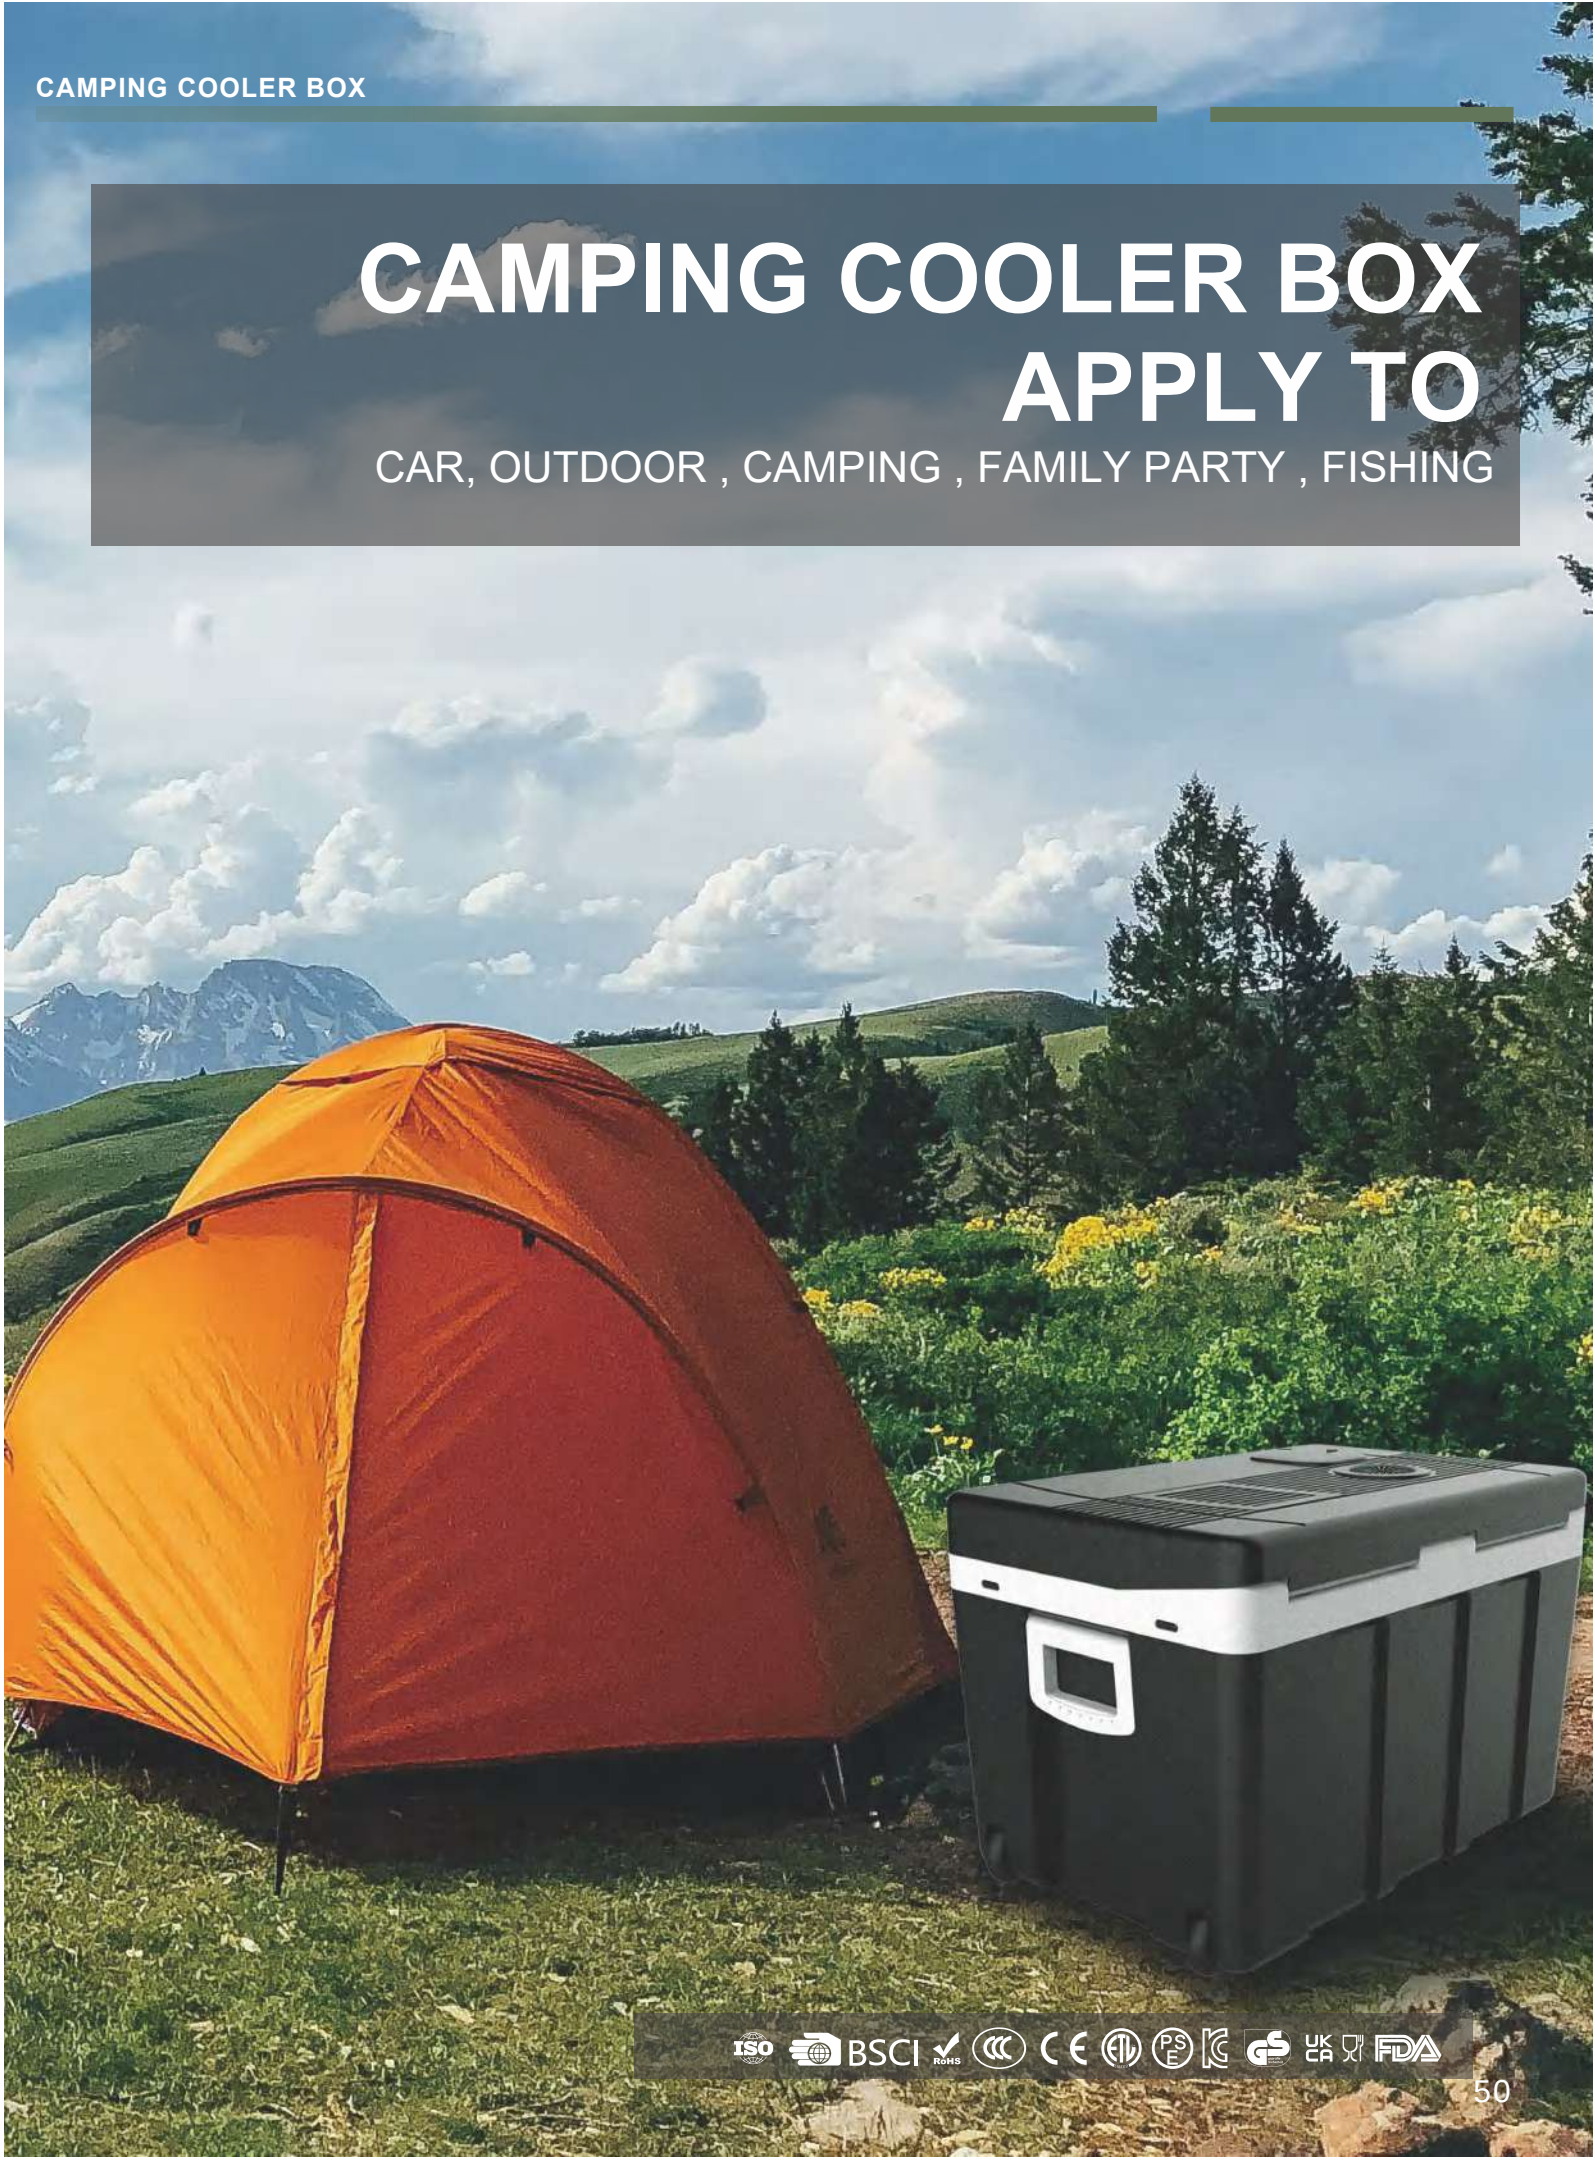





HEATING 50-60℃
COOLING 20℃
TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:8 Litre
- 3.Power consumption:48W±10%

Inner Box Size:209.5*455*299(mm)	Carton Size:419*465*598(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W(KGS):11/13	QTY/20"/40"/40"HC(PCS):960/1980/2330

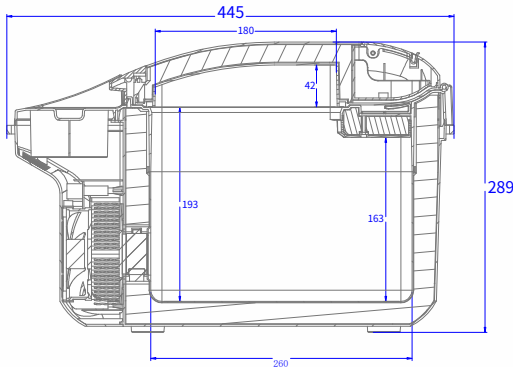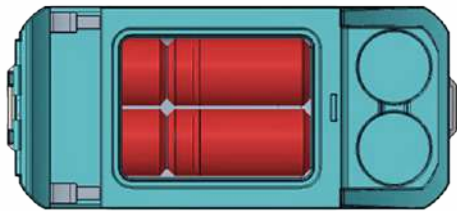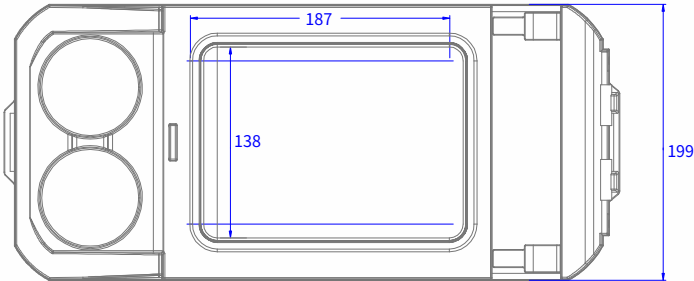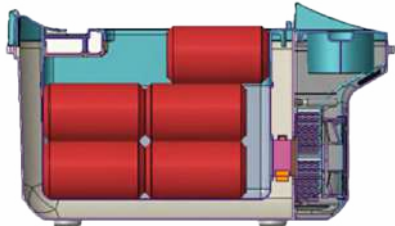

6 BOTTLES* 380ml Water
9 CANS* 330ml Cola







HEATING 50-60℃
COOLING 18-20℃
TA: 25℃



THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:48W±10%

Inner Box Size:393*324*457(mm)	Carton Size:410*341*476(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):4.5/5.5	QTY/20"/40"/40"HC(PCS):440/880/1020

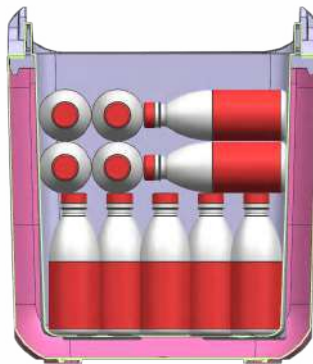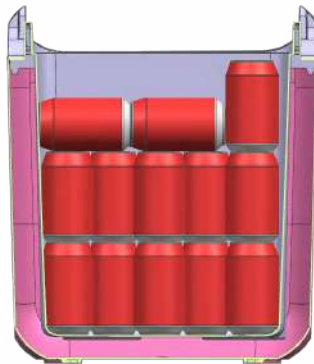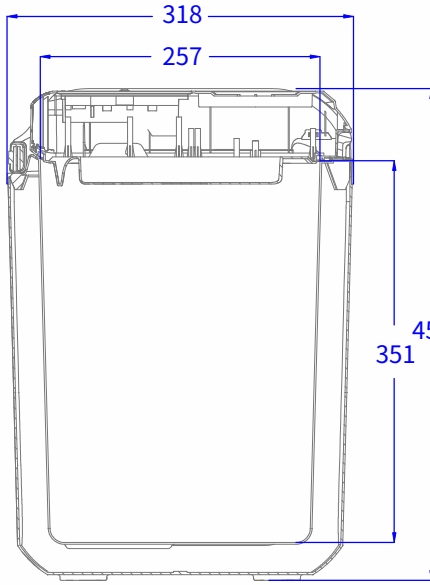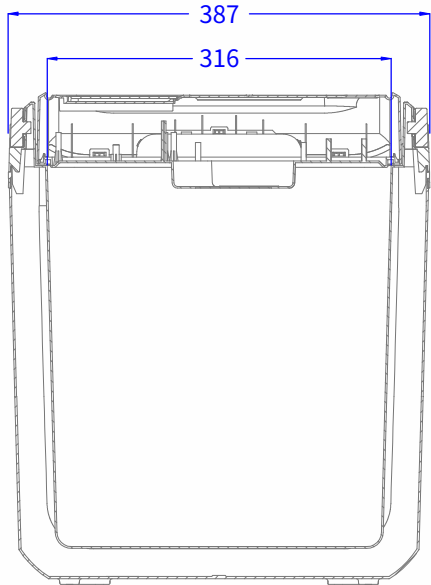

23 BOTTLES* 380ml Water
35 CANS* 330ml Cola

HEATING 50-60℃ COOLING 15-18℃



(Digital Display)
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:32 Litre
- 3.Power consumption:48W±10%

Inner Box Size:452*355*457(mm)	Carton Size:470*370*470(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.5/6.5	QTY/20"/40"/40*HC(PCS):240/500/860

THERMOELECTRIC COOLER AND WARMER




- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:32 Litre
- 3.Power consumption:48W±10%

Inner Box Size:452*355*457(mm)	Carton Size:470*370*470(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.5/6.5	QTY/20"/40"/40*HC(PCS):240/500/860



27 BOTTLES*
380ml Water

40 CANS*
330ml Cola

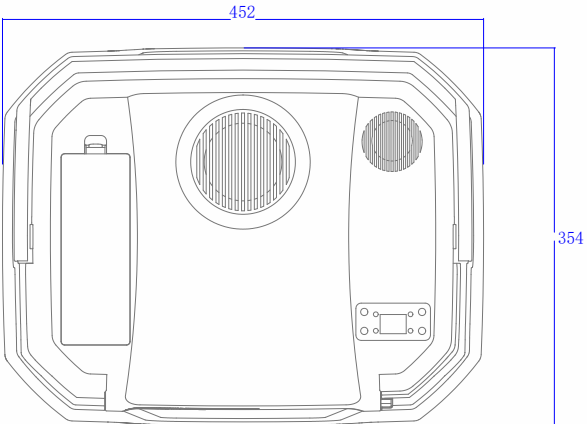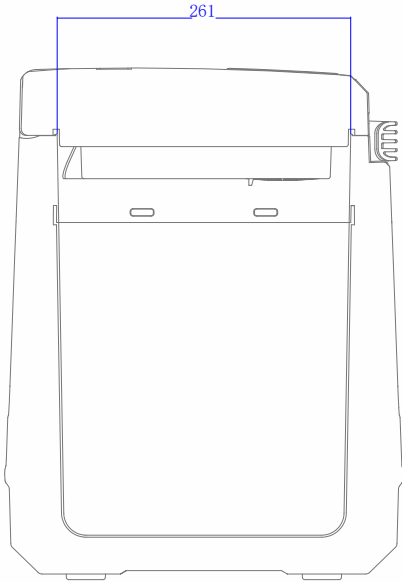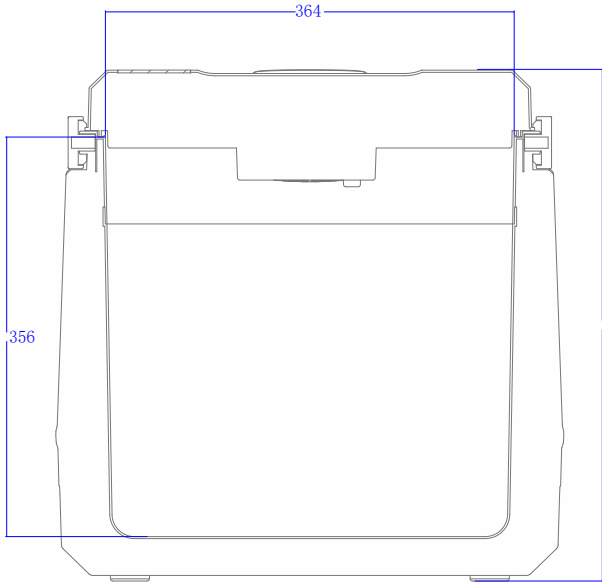

HEATING
50-60℃

COOLING
18-20℃

TA: 25℃



THERMOELECTRIC COOLER AND WARMER







- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:48W±10%

Inner Box Size:393*324*457(mm)	Carton Size:410*341*476(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):4.5/5.5	QTY/20"/40"/40"HC(PCS):440/880/1020

(Digital Display)
THERMOELECTRIC COOLER AND WARMER

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:48W±10%

Inner Box Size:393*324*457(mm)	Carton Size:410*341*476(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):4.5/5.5	QTY/20"/40"/40"HC(PCS):440/880/1020

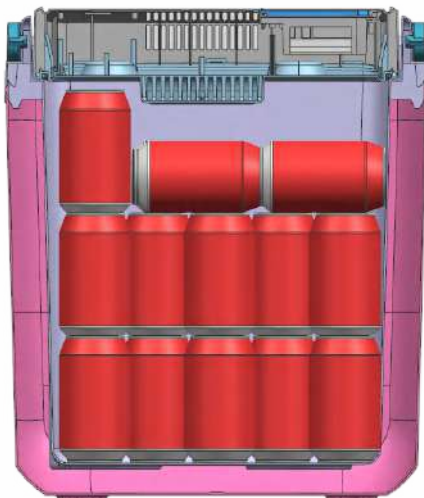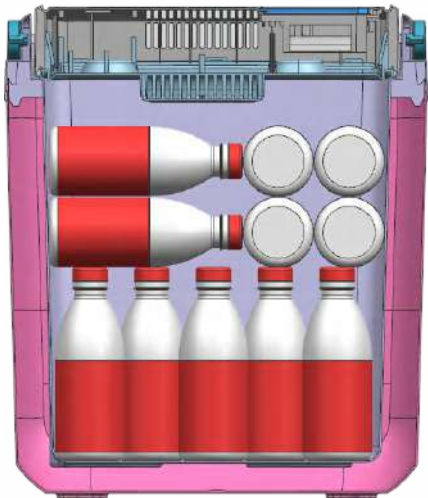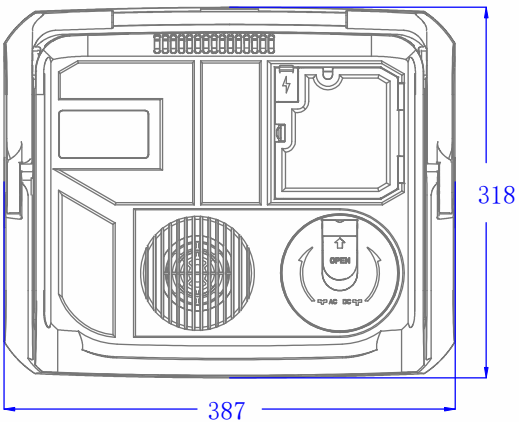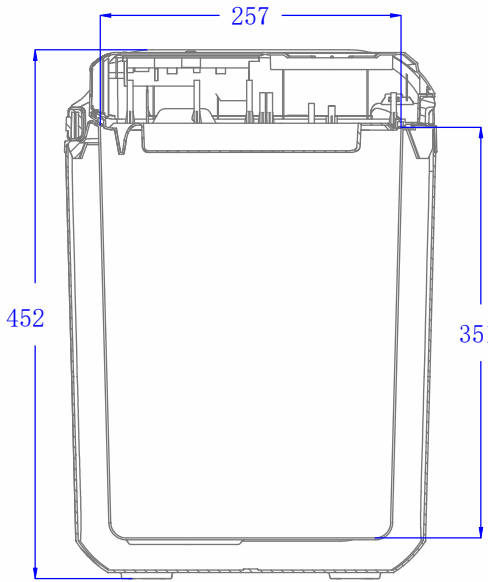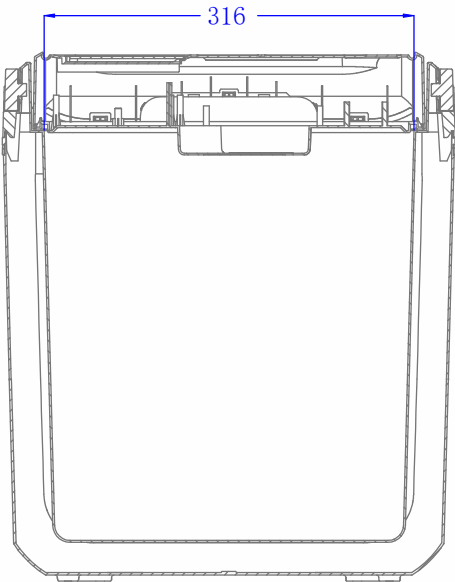

23 BOTTLES*
380ml Water



35 CANS*
330ml Cola



CAMPING COOLER BOX

HEATING 50-65℃
COOLING 20℃
TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:8 Litre
- 3.Power consumption:48W±10%





Inner Box Size:410*235*325(mm)	Carton Size:490*425*670(mm)
PACKING:1PC/Inner Box 4PCS/CTN	
N.W/G.W(KGS):11/13	QTY/20"/40"/40"HC(PCS):800/1600/1900



6 BOTTLES*
380ml Water



9 CANS*
330ml Cola

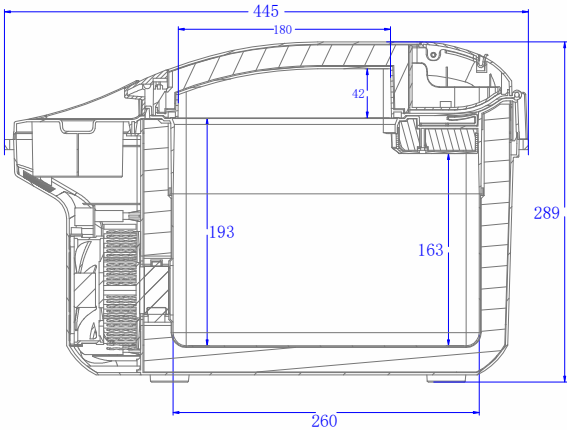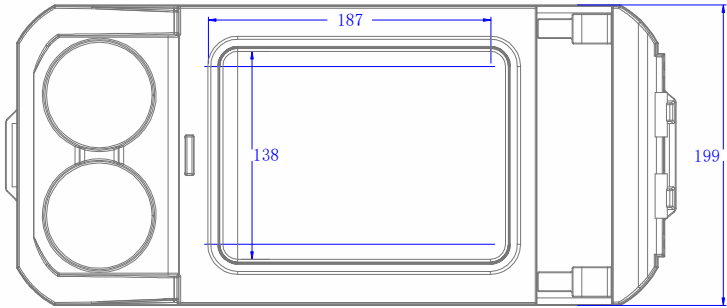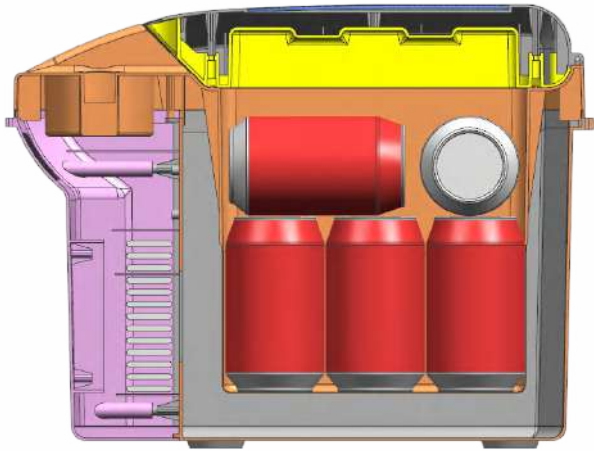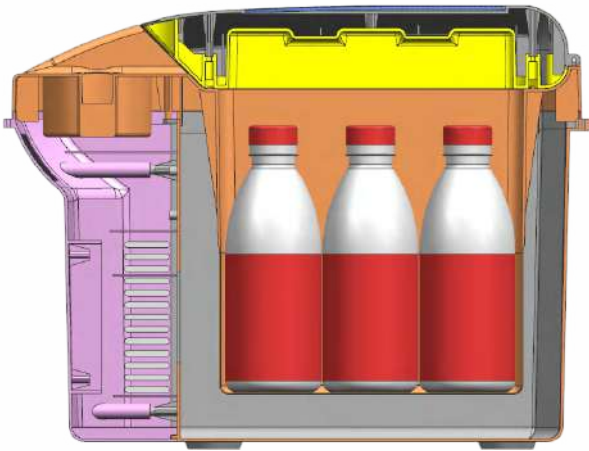

HEATING 50-65℃
COOLING 26-30℃
TA: 25℃



- 1.Voltage:DC 12V, AC 100V-240V
- 2.Volume:18 Litre
- 3.Power consumption:60W±10%





Inner Box Size:488*340*378(mm)	Carton Size:503*355*393(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.4/7	QTY/20"/40"/40"HC(PCS):421/900/1020



20 BOTTLES*
380ml Water



24 CANS*
330ml Cola

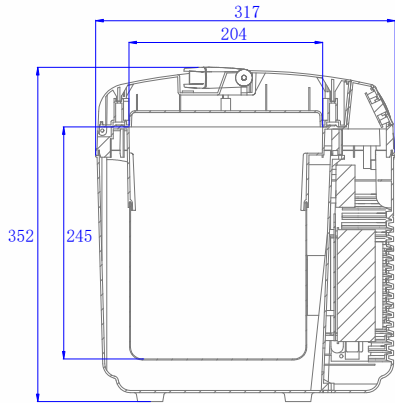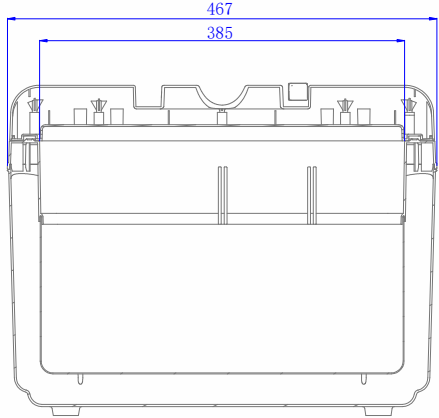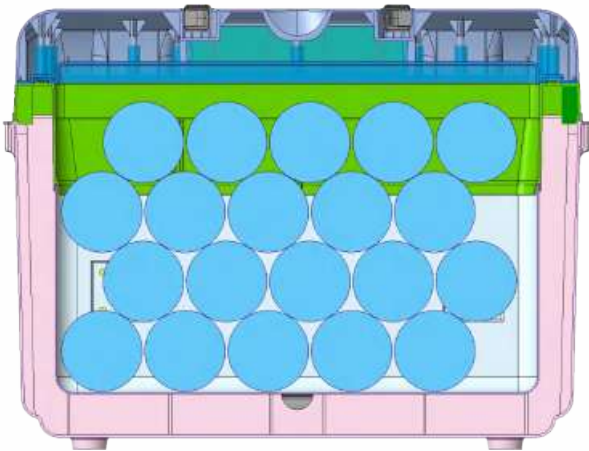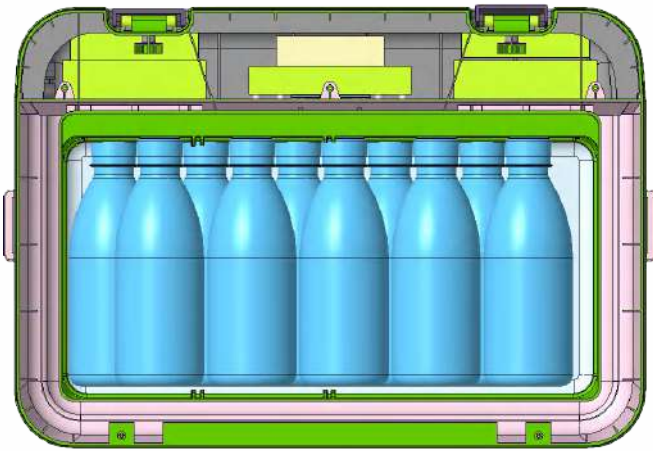

CAMPING COOLER BOX

HEATING 50-65℃ COOLING 16-20℃

TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:25 Litre
- 3.Power consumption:48W±10%

Outer Size:423*220*295(mm)	Inner Size:280*150*235(mm)
Inner Box Size:478*256*355(mm)	Carton Size:540*495*370(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):6/7.5	QTY/20"/40"/40"HC(PCS):600/1200/1350

HEATING 50-65℃ COOLING 22-26℃

TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:22 Litre
- 3.Power consumption:60W±10%

Outer Size:520*280*350(mm)	Inner Size:345*212*290(mm)
Inner Box Size:566*325*410(mm)	Carton Size:580*340*425(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5/6	QTY/20"/40"/40"HC(PCS):300/680/800

HEATING 50-65℃ COOLING 20-24℃

TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:35 Litre
- 3.Power consumption:60W±10%

Outer Size:610*320*400(mm)	Inner Size:420*250*340(mm)
Inner Box Size:657*355*470(mm)	Carton Size:675*370*485(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):7.5/8.5	QTY/20"/40"/40"HC(PCS):200/450/560



CAMPING COOLER BOX

HEATING 50-65℃
COOLING 18-20℃
TA: 25℃



1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
2.Volume:12 Litre
3.Power consumption:50W±10%

Outer Size:495*257*256(mm)	Inner Size:333*197*178(mm)
Inner Box Size:530*300*300(mm)	Carton Size:620*545*320(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):9.5/10	QTY/20"/40"/40"HC(PCS):500/1030/1200

HEATING 50-65℃
COOLING 22-26℃
TA: 25℃



1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
2.Volume:24 Litre
3.Power consumption:60W±10%

Outer Size:597*313*308(mm)	Inner Size:410*244*220(mm)
Inner Box Size:597*350*335(mm)	Carton Size:610*365*355(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.2/7	QTY/20"/40"/40"HC(PCS):350/730/820

HEATING 50-65℃
COOLING 20-24℃
TA: 25℃



1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
2.Volume:30 Litre
3.Power consumption:60W±10%

Outer Size:597*313*358(mm)	Inner Size:410*244*270(mm)
Inner Box Size:608*350*386(mm)	Carton Size:620*365*405(mm)
PACKING:1PC/Inner Box 1PC/CTN	
N.W/G.W(KGS):5.8/7.6	QTY/20"/40"/40"HC(PCS):300/620/700



HEATING 50-65℃ COOLING 14-18℃



TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:18 Litre
- 3.Power consumption:48W±10%

Inner Box Size:390*245*445(mm)	Carton Size:500*410*460(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):6.5/8.5	QTY/20"/40"/40"HC(PCS):550/1200/1400

12 BOTTLES* 380ml Water 20 CANS* 330ml Cola

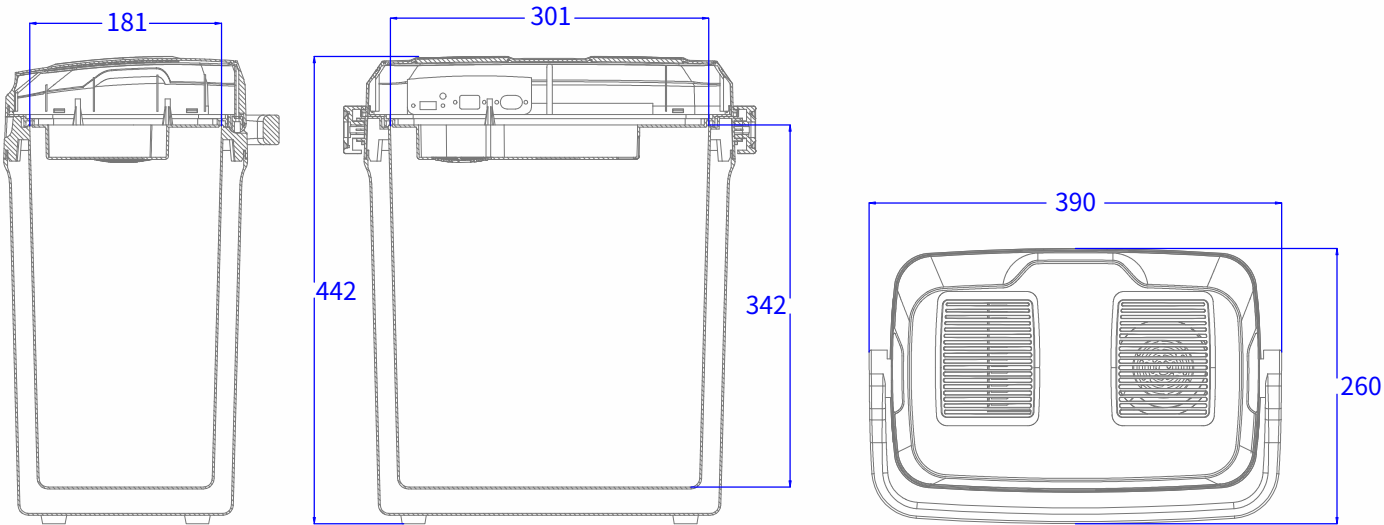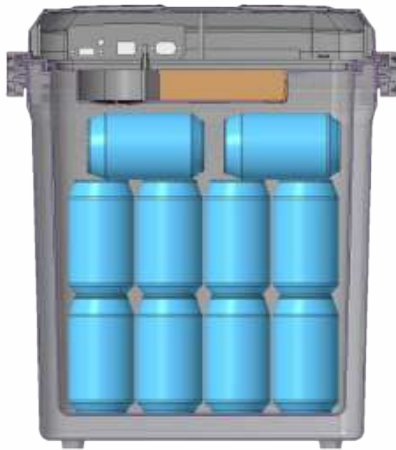

HEATING 50-65℃ COOLING 13-18℃



TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:24 Litre
- 3.Power consumption:48W±10%

Inner Box Size:405*305*453(mm)	Carton Size:630*420*470(mm)
PACKING:1PC/Inner Box 2PCS/CTN	
N.W/G.W(KGS):8/10	QTY/20"/40"/40"HC(PCS):500/1000/1100

23 BOTTLES* 380ml Water 34 CANS* 330ml Cola

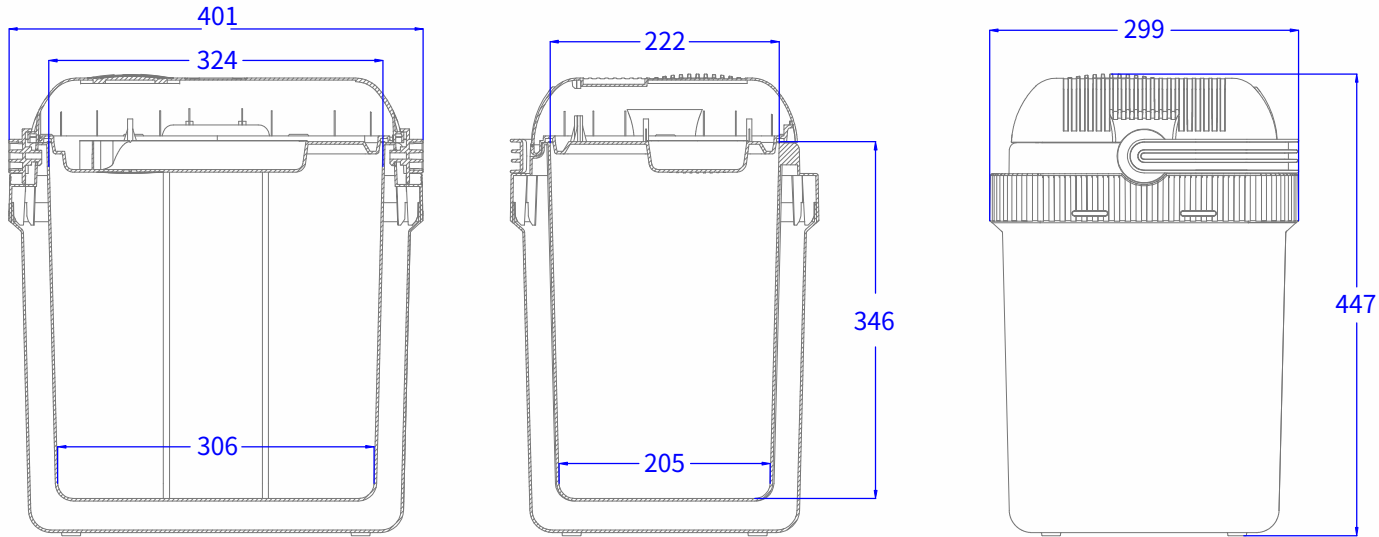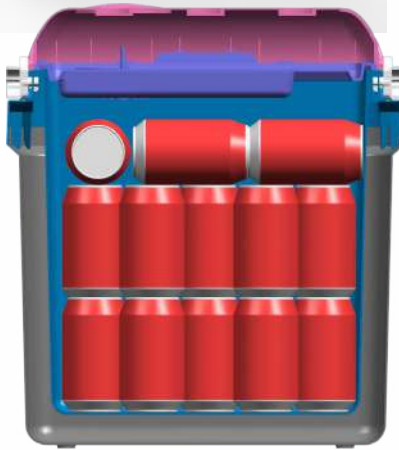

CAMPING COOLER BOX

HEATING
50-65℃


COOLING
13-18℃

TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
 - 2.Volume:26 Litre
 - 3.Power consumption:48W±10%
- | | |
|--------------------------------|-------------------------------------|
| Inner Size:300*240*335(mm) | Inner Box Size:410*325*440(mm) |
| PACKING:1PC/Inner Box 2PCS/CTN | Carton Size:670*425*455(mm) |
| N.W/G.W(KGS):7.9/10 | QTY/20"/40"/40"HC(PCS):500/950/1050 |

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
 - 2.Volume:26 Litre
 - 3.Power consumption:48W±10%
- | | |
|--------------------------------|-------------------------------------|
| Inner Size:300*240*335(mm) | Inner Box Size:410*325*440(mm) |
| PACKING:1PC/Inner Box 2PCS/CTN | Carton Size:670*425*455(mm) |
| N.W/G.W(KGS):8/10 | QTY/20"/40"/40"HC(PCS):500/950/1050 |

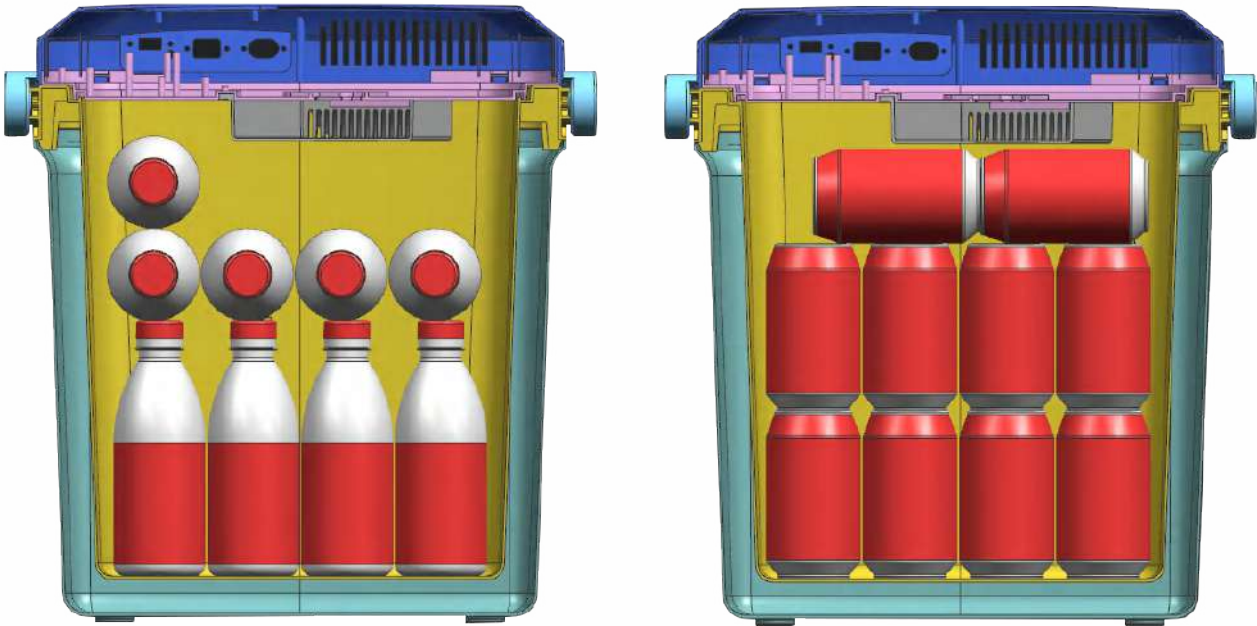

 **17 BOTTLES***
380ml Water

 **30 CANS***
330ml Cola



HEATING 50-65℃
COOLING 13-18℃
TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*340(mm)	Inner Box Size:410*325*440(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*455(mm)
N.W/G.W(KGS):7.9/10	QTY/20"/40"/40*HC(PCS):500/950/1050

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*340(mm)	Inner Box Size:410*325*440(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*455(mm)
N.W/G.W(KGS):8/10	QTY/20"/40"/40*HC(PCS):500/950/1050



HEATING 50-65℃
COOLING 13-18℃
TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*340(mm)	Inner Box Size:410*325*440(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*455(mm)
N.W/G.W(KGS):7.2/10	QTY/20"/40"/40*HC(PCS):500/950/1050


- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*340(mm)	Inner Box Size:410*325*440(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*455(mm)
N.W/G.W(KGS):8/10	QTY/20"/40"/40*HC(PCS):500/950/1050



CAMPING COOLER BOX

HEATING 50-65℃
COOLING 13-18℃
TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%


Inner Size:300*240*350(mm)	Inner Box Size:410*335*535(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*495(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40*HC(PCS):400/800/920

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*335*535(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*495(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40*HC(PCS):400/800/920



HEATING 50-65℃
COOLING 13-18℃
TA: 25℃



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*335*535(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*495(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40*HC(PCS):400/800/920

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*335*535(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*495(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40*HC(PCS):400/800/920



CAMPING COOLER BOX

HEATING 50-65℃
COOLING 13-18℃
TA: 25℃




- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*335*535(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*495(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40*HC(PCS):400/800/920

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%

Inner Size:300*240*350(mm)	Inner Box Size:410*335*535(mm)
PACKING:1PC/Inner Box 2PCS/CTN	Carton Size:670*425*495(mm)
N.W/G.W(KGS):8.2/11.5	QTY/20"/40"/40*HC(PCS):400/800/920

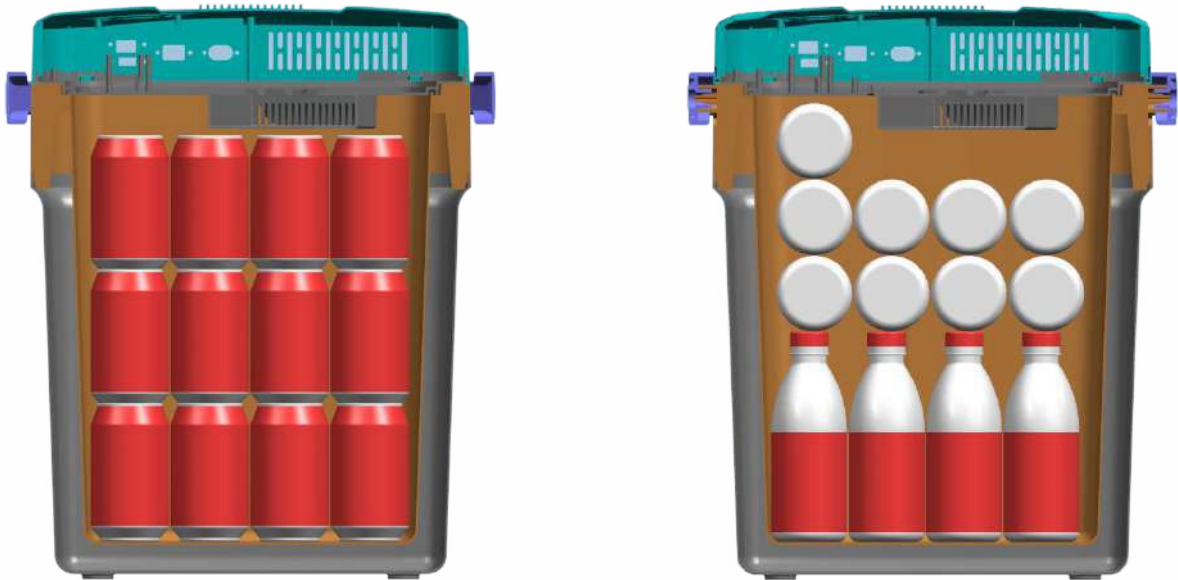

21 BOTTLES*
380ml Water

36 CANS*
330ml Cola

CAMPING COOLER BOX

HEATING 50-65°C COOLING 13-15°C

TA: 25°C



- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:50 Litre
- 3.Power consumption:48W±10%

Inner Size:495*335*330(mm)	Inner Box Size:615*420*435(mm)
PACKING:1PC/Inner Box 1PC/CTN	Carton Size:630*435*450(mm)
N.W/G.W(KGS):7.5/8.5	QTY/20*/40*/40*HC(PCS):220/450/550

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:45 Litre
- 3.Power consumption:70W±10%

Inner Size:540*300*300(mm)	Inner Box Size:690*415*410(mm)
PACKING:1PC/Inner Box 1PC/CTN	Carton Size:710*425*430(mm)
N.W/G.W(KGS):8.3/9.5	QTY/20*/40*/40*HC(PCS):210/435/510



HEATING 50-65°C COOLING 20-24°C

TA: 25°C



(Double Cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:50 Litre
- 3.Power consumption:60W±10%

Inner Size:303*477*347(mm)	Inner Box Size:635*465*565(mm)
PACKING:1PC/Inner Box 1PC/CTN	Carton Size:650*480*580(mm)
N.W/G.W(KGS):8.7/9.8	QTY/20*/40*/40*HC(PCS):150/300/360

(Double Cooling)

- 1.Voltage:DC 12V and AC 220V-240V or AC 100-120V
- 2.Volume:50 Litre
- 3.Power consumption:60W±10%

Inner Size:303*477*347(mm)	Inner Box Size:635*465*565(mm)
PACKING:1PC/Inner Box 1PC/CTN	Carton Size:650*480*580(mm)
N.W/G.W(KGS):8.7/9.8	QTY/20*/40*/40*HC(PCS):150/300/360

