



Display Screen Catalog

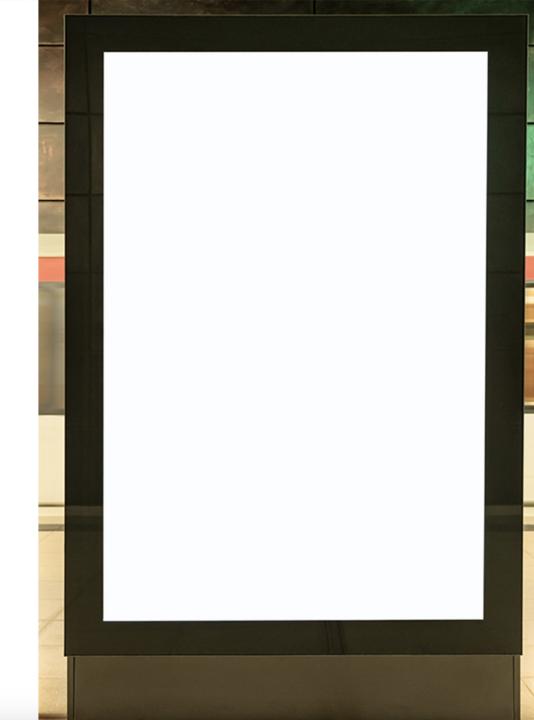

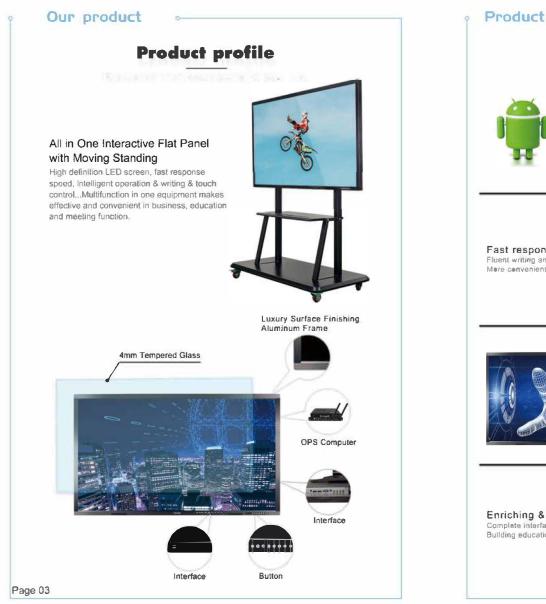

Product features **Main features** Dual Core Processor Windows and Android dual system bullt-in design Both systems can achieve whiteboard writing and multimedia playing Analuze Fast response speed Fluent writing and demonstration Business Mere convenient courseware management Intelligent Operation Freely write, annotate and screenshot Automatically recognize input channel Intelligent eve protection Light sensor with automatic brightness control Energy Save & Screen Intelligent awaken Enriching & Expanding Complete interfaces, strong compatibility Building educational resource sharing platform

Know more

All in One Interactive Flat Panel

Scene application

Meeting Room Presentation

Compared with traditional whiteboards and projectors, interactive flat panel not only has exquisite display effects, smart interactivity and remote meeting function, but also supports wireless connection and screen sharing which removed the complex wiring. It has received highly preference and wide application in the conference machine market.



Specifications

All in One Interactive Flat Panel

Model					
type -	32mch	43inch	49inch	56inch	58inch
CPU	i3/15/67 (aptienal)	i3/i5/i7 (optienal)	(3/15/17 (eptienal)	136597 (optional)	(3/15/17 (0000/181)
RAM	4GE/8G8/16GB	4GB/80B/16GB	4GB/8GB/16GB	4GB/8GB/16GB	4G8/8GE/18G
Mamory	120GB SSD (optional)	120GB \$5D (optional)	120GB SSD (optional)	1200B SSD (optional)	120GB SSD (optional)
Windows OS	Windows7/10	Windows7/10	Windows7/10	Windows7/10	Windows7/10
Android OS	N/A	N/A	N/A	(optional)	N/A
Size of product(mm)	760*460*58	1078*630*58	1132*662*58	1265*736*58	1325*778*58
Size of display(mm)	720*420	944*534	1078*608	1211*682	1271*724
N.W. (KGS)	14	22	24	28	30
G.W. (KGS)	20	30	32	39	42
Resolution	1920*1080	1920*1080	1920*1080	3840*2160	1920*1080
Colors	1.07 billion	1.07 billion	1.07 billion	1.07 billion	1.07 billion
Power	115W	120W	125W	150W	160W
Power of display	55W	60W	65W	90W	100W
Life.time	50000H	50000H	50000H	50000H	50000H
Type of display	LED	LED	LED	LED	LED
Ratio of display	16:09	15:09	16.09	16:09	16:09
Best viewing angle	up 89 down 89 left 89 right 89	up:89 down:89 left:89 right:89	up:89 down:89 left:89 right:89	up.89 down.89 left:\$9 right:89	up:89 down:89 left:89 right:89
Max, viewing angle	176°	178*	178°	176'	178°
Working voltage	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V
Stanoby power	3W	ЗW	ЗW	3W	3W
Working temperature	0~45°C	0~45°C	0~45°C	0~45°C	0~45°C
Storage temperature	-20°C-60°C	-20°C~60°C	-20°C-60°C	-20°C60°C	-20°C-60°C
Working humidity environment	5%-90%	5%-90%	5%-90%	5%-90%	5%-99%
Power of speaker	8010W	8Q10W	8Q10W	8010W	BEDIEVV
Glass type	4mm tempered glass	4mm tempered glass	4mm lempored glass	4mm temperad glass	4mm tempered glass
Anti-glarge	optional	optional	optional	option	ablicital
Frent parts	N/A	N/A.	N/A	N/A	N/A
Back ports (Android option)	N/A	NIA	N/A	N/A	NUA

Back ports(Wildows)

DC(9V-12V)*1;MIC*1;AUDIO*1;LAX*1;USB3 0*2;USB2.0*2;HDMI*1;VGA*1






Model	1000	251	1000	the second s	the second s
type	65inch	Türsh	75inch	Blinch	98inch
CPU	i3/i5/i7 op6onal)	(3/15/17 (optional)	13/15/17 (eptional)	i3/15/17 (optionel)	i3//5//7 (optional)
RAM	4GB/8GB/16GB	4GB/8GB/16GB	4GB/8GB/16G5	4GB/SGB/18GB	4GB/8GB/16GB (optional)
Μθιπιαζγ	(aptional)	120GB SSD (optional)	120GB SSD (optional)	120GB SSD (optional)	(optional)
Windows OS	Windows7/10	Windows7/10	Windows7/10	Windows7/10	Windows7/10
Android OS	Optional	Standard	Optional	Standard	Standard
Size of product(mm)	1487*862*58	16001935158	1706*984*58	1970*1140*80	2230*1290*120
Size of display(mm)	1433*808	1540*888	1652*930	1916*1086	2229*1265
N.W. (KGS)	40	56	60	74	130
3.W. (KGS)	51	74	78	98	155
Resolution	3840*2160	3840*2160	3840*2160	3840*2160	3840*2160
Colors	1.07 billion	1.07 billion	1.07 billion	1.07 billion	1.07 billion
Power	178W	196W	248W	290W	620W
Power of display	118W	136W	168W	230W	540W
Life time	50000H	50000H	50000H	50000H	50000H
Type of display	LED	LED	LED	LED	LED
Ratio of display	16:09	16:09	16:09	16:09	16:09
Best viewing angle	up:89 down:89 left:89 right:89	up:89 down:89 left:89 right:89	up.89 down.89 left.89 right.89	up 89 down 89 left 89 right 89	up:89 down.89 left:69 right:89
Max, viewing angle	178°	178°	178"	178*	178°
Working voltage	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V
Standby power	3W	3W	3W	3WV	3W
Working temperature	D~45℃	0~45℃	0~45°C	0~45°C	0~45°C
Storage temperature	-20°C-60°C	-20'C-60'C	-20°C~60°C	-20°C~60°C	-20°C60°C
Working humidity environment	5%-90%	5%-90%	5%-90%	5%-90%	5%-90%
Power of speaker	8Q10W*2	8Ω10W*2	8Ω14W*2	8Q14W*2	8Q14W*2
Glass type	4mm tempered glass	4mm tempered glass AG	4mns tempered glass AG	4mm tempered glass AG	4mm tempered glass AG
Anti-clare	optional	unaita	optional	optional	optional

Back ports (Android option) Back ports (Windows) U682.0 type B*1 LAN*1 YGA*1(HDMI*1,U982.0*1 DC(9V-12V)*1,MIC*1;AUDIO*1,LAN*3, U583 0*2, U582.0*2;HDMI*1;VGA*1



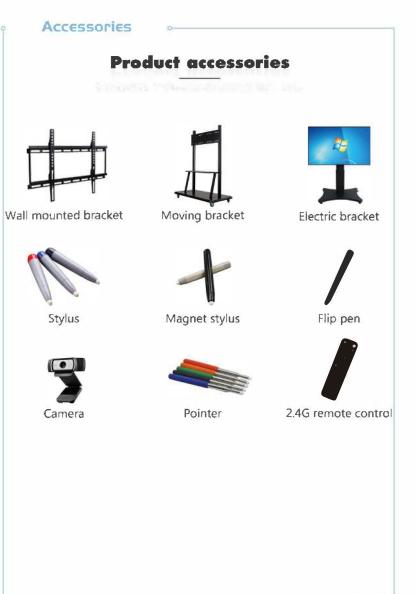

Our product

Product profile



Vertical/Wall Mounted Digital Advertising Display

High definition LED screen, fast response speed, intelligent operation & writing & touch control...Multifunction in one equipment makes effective and convenient in business, education and meeting function.



Product features

Main features



Repeat play

The ad image will automatically loop, you can set the carousel interval, dynamic ad display makes the ad more convenient

Support for USB Plug in USB to automatically recognize content and play it automatically





Remote manage

Connect to the network login platform to centrally manage multiple advertising machines placed in different places to achieve remote publishing

Quality sound Dual speaker design, full of sound, giving you a comfortable listening experience



Кпош тоге

Vertical Digital Advertising Display

Scene application

Digital Signage Advertising Kiosk

1080P HD screen and stereo sound system vision feeling shock. Split screen, various play modes and time switch can meet different advertisement demands to play more worry-free. The advertising machine can be managed using a USB flash drive, mobile phone or network terminal control version to facilitate the simultaneous replacement of advertising content.




Specifications

Vertical Digital Advertising Display

Model					
type	43inch	48eich	35indt	58inch	65inch
CPU	RK3286/ Altwinner A83T/ Allwinner A20	RK3288/ Allwinner A83T/ Allwinner A20	RK3288/ Allwinner A83T/ Allwinner A20	RK3288/ Allwinner A83T/ Allwinner A20	RK3288/ Allwinner AB3T/ Allwinner A20
RAM	512MB	2GB/1GB/ 512MB (optional)	2GB/1GB/ 512MB (optional)	2G8/1GB/ 512M8 (optional)	2/38/1GB/ 51/2MB
Memory	16GB/8GB (optional)	16GB/8GB (optional)	16GB/8GB (optional)	16GB/8GB (optional)	16G8/80B (optional)
Android OS	Android 6.0/4.4/4.2	Android 6.0/4.4/4.2	Android 6.0/4.4/4.2	Android 6.0/4.4/4.2	Android 6.0/4.4/4.
Size of product(mm)	1750*624*40	1810*680*65	1850*775*42	1860*820*42	1850*910*42
Size of display(mm)	942*530	1054*593	1210'681	1271*724	1433*808
Size of package(mm)	1900"780"180	1950*820*180	2000*910*180	2000*960*180	2000*1050*180
N.W.(KGS)	40.8	50	59.5	61.7	71.7
G.W.(KGS)	51.3	59.8	72	74	85.5
Display Type	LED	LED	LED	LED	LED
Display Colors	1.08B(Ditherd 10bit)	1.08B(Ditherd 10bit)	1.07 Billion colors	1.08B(Ditherd 10bit)	1.07 Billion colors
Resolution	1920*1080 FHD				
Ratio of display	16:9	16:9	16:9	16:9	16:9
Wide Viewing Angle	178°	178*	178*	178*	178"
Glass thickness	4mm tempered glass				
Glass transmittance	96%	95%	95%	95%	95%
DC input	x1,(12V; 3.0A)				
HDMI INPUT	x1	xt	x1	x1	x1
RJ45	x1	x1	x1	×1	xt
Earphone	x1,3.5mm	x1,3.5mm	x1,3.5mm	x1,3.5mm	x1,3.5mm
USB OTG	x1	x1	x1	x1	x1
USB HOST	x1	x1	x1	x1	x1
Standby power	≤3W	s3W	≤3W	≤3W	≤3W
Working humidity environment	80%	80%	80%	80%	80%
Working hours	7x24	7x24	7x24	7x24	7x24
Working voltage	50-60HZ 100-250V	50-60HZ 100-250V	50-60HZ 100-250V	50-80HZ 100-250V	50-60HZ 100-250V
Working temperature	-20°C~60°C	-20°C~60°C	-20°C-60°C	-20°C-60°C	-20°C~60°C
Storage temperature	-30°C~70°C	-30°C~70°C	-30°C-70°C	-30°C~70°C	-30°C-70°C
Power of speaker	8Ω 12.5W*2	80 12.5W*2	80 12.5W*2	8Ω 12.5W*2	8Ω 12.5W*2
Frame material	Allov	Allov	Alloy	Allov	Allov



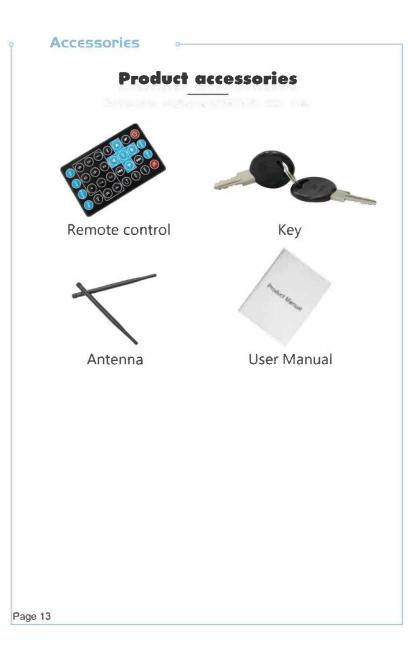

Кпош тоге

Wall Mounted Digital Advertising Display




Scene application

Digital Signage Advertising Kiosk

1080P HD screen and stereo sound system vision feeling shock. Split screen, various play modes and time switch can meet different advertisement demands to play more worry-free. The advertising machine can be managed using a USB flash drive, mobile phone or network terminal control version to facilitate the simultaneous replacement of advertising content.



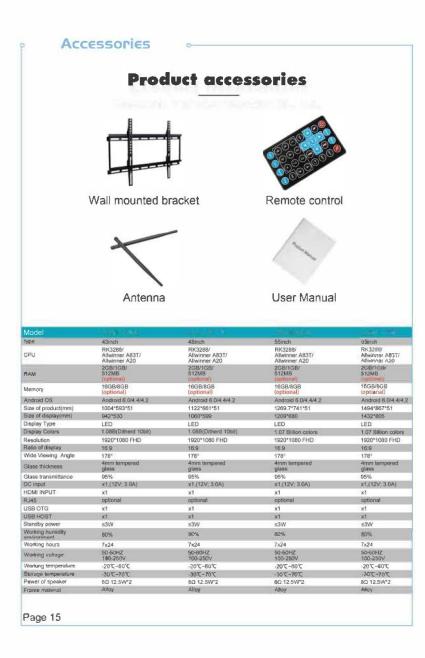




Product features

Main features

SAMPLE IN MARKAN AND THE IN



4K high resolution

3840*2160 resolution make the image brighter and more vivid, and the picture quality is more detailed and realistic.

Multi touch

You can write, zoom in, zoom out, erase, drag and other shortcuts in the writing function interface, support multi-touch, infrared touch, precise and fast





Retain traditional teaching

Touch interaction, multimedia teaching and chalk writing, seamlessly interface traditional teaching blackboards with perceptible interactive blackboards

Wireless screen

Built-in WiFi, wireless Internet access and remote functions, mobile terminal connected to WiFi for on-screen operation





Know more

Nano Smart Teaching Blackboard



Scene application

School Teaching

Nano smart teaching blackboard has received great popularity based on its premium display effects, smart interactivity, annotation function, multimedia files playing, a large quantity of extensive applications, abundant Internet source and remote teaching functions. It is becoming a strong assistant of teachers.



Specifications

Nano Intelligent Teaching Blackboard

Model				
type	65inch	70knch	75inch	86inch
CPU	Quad core	Quad core	Quad core	Quad core
RAM	2G	26	2G	2G
Memory	32GB	32GB	32GB	32GB
Windows OS	Optional	Optional	Optional	Optional
Android OS	Standard	Standard	Standard	Standard
Size of product(mm)	4200*1250*60	4200*1250*60	4200*1250*60	4200"1250"60
Size of display(mm)	1433*808	1542*870	1652*930	1900*1070
Colors	10bit, 1.07B	10bit, 1.07B	10bit, 1.07B	10bit, 1.07B
Power	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz	100-240V, 50/60Hz
Display Ratio	16:09	16:09	16:09	16:09
Brightness	350od/ m²-450od/ m²	350cd/ m ² -450cd/ m ²	350cd/ m ² -450cd/ m ²	350cd/ m ² -450cd/ m ²
Blacklight	LED	LED	LED	LED
Best viewing angle	178*	178"	178*	178"
Video format	PAL/SECAM	PAL/SECAM	PAL/SECAM	PAL/SECAM
Speaker output power	2*30W	2*30W	2*30W	2*30W
Power consumption	≤260W	≤260W	≤260W	≤260W
Standby power consumption	≤0.5W	≤0.5W	s0.5W	≤0.5W
Lifelime	60000 Hauts	50000 Hours	SICOO Hours	50000 Hours
noteliation	Wall mounted bracket	Wall mounted bracket	Wall mounted bracket	Wall mounted bracket
Writing suitace material	4MM tempered glass	4MM tempered glass	4MM tempered glass	4MM tempered
Toualt shuff	finger or capacitive pen	finger or capacitive pen	finger or capacitive gen	finger or capacitive pen
ouch connection port	USB2.0	USB2:0	USB2.0	USB2.0
Touch eulput standard	32768(W)* 32768(D)	32768(W)* 32768(D)	32768(W)* 32768(D)	32768(W)* 32768(D
Input		HDMI in*2; VGA*2; VGA AUI	010*2: USB*2; YP6Pr*1; AV*1; MI	C+1
€utout		USB TOUCH*1: EARPHON	E OUT*1: AV OUT*1: Coaxial OL	IT

H*1; EARPHONE OUT*1; AV OUT*1; Coa



