

Vous l'Imaginez,
Nous le Fabriquons

Nous Connectons Les Meilleurs Fabricants du monde à Votre Entreprise

Les Nouveautés LED

Juin 2025



YOUR SMART **G**LOBAL **P**ROCUREMENT & **S**OURCING PARTNER


Avec plus de 27 ans d'expérience, GPS Monaco Group est votre Allié de Confiance en matière de Sourcing et d'Approvisionnement International.

NOS AVANTAGES



Excellence à Votre Service

Nous nous efforçons constamment de dépasser les attentes de nos clients en leur offrant des solutions et des services de premier ordre.



Approche Sur Mesure

Notre approche centrée sur le client vous fournit des solutions sur mesure pour vos besoins uniques.



Présence Internationale

Depuis nos bureaux à Monaco, France, Suisse, Asie et Arabie Saoudite, nous sécurisons vos achats de l'usine à vos entrepôts.

Plus de
60
Millions
de Produits Importés.

+1700
Usines Auditées.




The customized spring with curve shape design to help the lamp much easier pulling out when replacement. It can avoid accidental injury



is in supreme heat emission with sealed thermal glue. It also offers a high configuration in electrical performance, including flicker-free, THD<10 and finest dimming compatibility.



track arm performs in well friction condition even though adjust over hundreds of times.

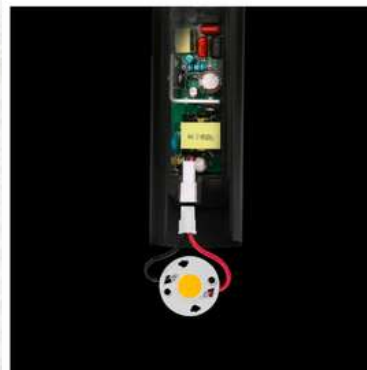

Interchangeable LED Connecting System



2 optics including reflector and lens and 4 beam angles. Honeycomb filter work as optional. Anti-glare rings is optional in white, black and golden.

Technical informations


Finish: White Black




Reflector: White Black Custom

350° 90°

Cut-out	Ø68mm		
Power	10W		
Voltage	AC200-240V 50/60Hz		
Main Body Material	Die-casting Aluminum		
Beam Angle	15° 24° 36° 60°	24° 36° 60°	15° 24° 36° 60°
Color temperature	2700K 3000K 4000K	1800K-3000K 	2700K-3000K-4000K-5000K-5700K 
Light source	Bridgelux COB	Bridgelux COB	EVERCORE COB
CRI	80+ 90+	95+	80+ 90+
System Lumen	813lm	559lm	613lm
Efficacy	81lm/w	58lm/w	67lm/w



350° 90°

Cut-out	Ø68mm		
Power	15W		
Voltage	AC200-240V 50/60Hz		
Main Body Material	Die-casting Aluminum		
Beam Angle	15° 24° 36° 60°		
CRI	80+ 90+		
Color temperature	2700K 3000K 4000K	2700K-3000K-4000K-5000K-5700K 	
Light source	Bridgelux COB	EVERCORE COB	
System Lumen	1325lm	1088lm	
Efficacy	89lm/w	75lm/w	




350° 90°

Cut-out	Ø68mm		
Voltage	AC200-240V 50/60Hz		
Main Body Material	Die-casting Aluminum		
Beam Angle	18° 24° 36° 60°(Lens) 15° 25° 38° 60°(Reflector)		
Color temperature	2700K 3000K 4000K		
Light source	Bridgelux COB		
CRI	80+ 90+		
Power	20W	25W	
System Lumen	1594lm 1434lm	1863lm 1726lm	
Efficacy	82lm/w 75lm/w	81lm/w 74lm/w	



Smart Tri-proof LED Light

- Tool-free connection: save installation cost
- Sustainable: easy maintain, driver could be replaced
- High efficiency: 150lm/W, 160lm/W, 185lm/W optional
- Special application available: Anti-oil, Anti-ammonia
- Modularization of sensor and emergency functions



Unit: mm

Watt	Efficacy	Lumen	CCT	Length(mm)
20W	150lm/W	3000lm	4000K	600
34W	150lm/W	5100lm	4000K	1200
50W	150lm/W	7500lm	4000K	1500
55W	150lm/W	8250lm	4000K	1800

CCT Range: WW(3000K), NW(4000K), DW(5000K), CW(6500K)

Tool-less and Flexible connection



Driver replaceable




Anti-oil/anti-ammonia






Microwave Sensor Kit



Specification of dip-switch function


Hold time			Stand-by dimming level		Detection area	
1	2	Value	3	Value	4	Diameter
OFF	OFF	5S	OFF	0	OFF	High(6m)
ON	OFF	30S	ON	20%	ON	Low(4m)
OFF	ON	3mins				
ON	ON	10mins				

PIR Sensor Kit



- Temperature and ambient temperature difference can be sensed
- PIR hold time: 60S

Emergency Kit




Emergency power	2W
Emergency lumen	200lm
Emergency time	90mintues-3hrs
Indicator	Red-in charging Green-full charging
NFC function	To judge emergency work or not



- Product size : 65*40cm
- Lumen : 2400lm
- IRC : 80
- Angle : 360°
- Input : AC85-265V
- Tension : AC110-240V - 50/60Hz
- Light source : G9
- Weight : 10kg
- Lifetime : 50 000H
- CE / RoHS




Material: Aluminum+Steel+PMMA
CRI: ≥90

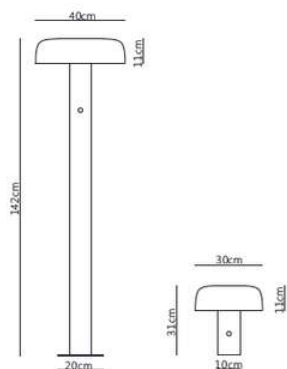


LED: 28W
Lumen: 1288 Lm

LED: 17W
Lumen: 892 Lm




LED: 17W
Lumen: 839 Lm

LED: 17W
Lumen: 839 Lm

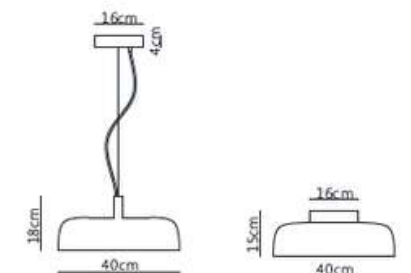

LED: 27W
Lumen: 1225 Lm

LED: 27W
Lumen: 1225 Lm

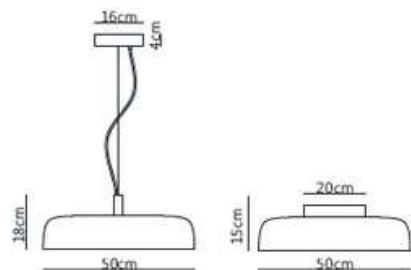

LED: 36W
Lumen: 1837 Lm

LED: 36W
Lumen: 1837 Lm



PORTABLE SOLAR POWER SYSTEM

Outdoor Lighting / Emergency Power

500W/1000W/1500W

- Fast Charging Efficiency
- Handrail design
- Large Capacity Is More Durable





Patrick Bogaerts
Fondateur, CEO

Contact

Téléphone : +33 6 07 93 79 98

Email : Patrick@GPSMonacoGroup.com

Site Web : <https://GPSMonacoGroup.com>